


RFL

Screw to connect female couplings for air conditioning & refrigeration application, low friction sleeve

RFL screw-to-connect female couplings are equipped with a low friction sleeve in order to reduce connection effort and friction. Fully interchangeable with RF series same size.




Applications



Seals	CR
Material	Brass & Steel
Valve Type	Flat
Working temperatures	-40 °C to 120 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	MARKET
Connection	Screw to Connect
Disconnection	Unscrew to Disconnect
Connection Under Pressure	Allowed Residual

Pressure Drop

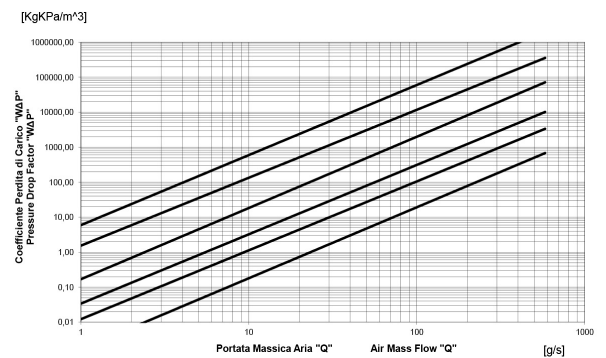

Data shown in the diagram are indicative and not binding. KgKPa/m³. Dash size are specified.