


RFLS - RFS

Couplings for air conditioning & refrigeration applications, integrated safety sleeve

RFLS screw-to-connect female couplings are equipped with a low friction sleeve to reduce connection effort together with an integrated safety sleeve to prevent accidental disconnections. Corresponding male couplings RFS series are characterized by Faster profile interchangeability.



Applications

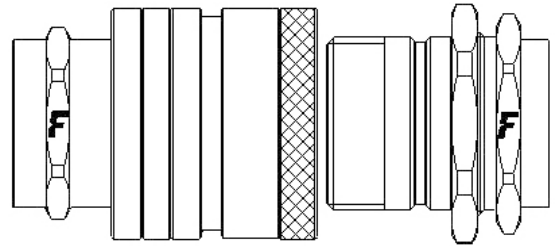

Seals	CR
Material	Brass & Steel
Valve Type	Flat
Working temperatures	-40 °C to 120 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	FASTER
Connection	Screw to Connect
Disconnection	Unscrew to Disconnect
Connection Under Pressure	Allowed Residual