


TNL

Standard couplings, US interchange, free flow

TNL series couplings are commonly used in US market as an alternative to standard series. Assembled without internal valves they have been designed to maximize flow. Fully interchangeable with TNV versions.



Applications

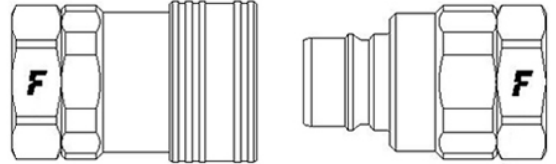

Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/4	27	22	0	60			110
1/2	22	75	0	92			88
3/4	19	170	0	110			76

Seals	NBR
Material	Steel
Valve Type	None
Working temperatures	-25 °C to 125 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	MARKET
Connection	Sleeve Retraction
Disconnection	Sleeve Retraction
Connection Under Pressure	Not Allowed

