


## VF

### Couplings for braking systems, ISO 5676 interchange

Flat face couplings designed to connect the braking circuit of trailers to the hydraulic circuit of agricultural machines. ISO 5676 interchange. Some special versions equipped with an additional safety sleeve (VFS) or with an hydraulic lock (VFB) to prevent accidental disconnections are available in the range.



### Applications

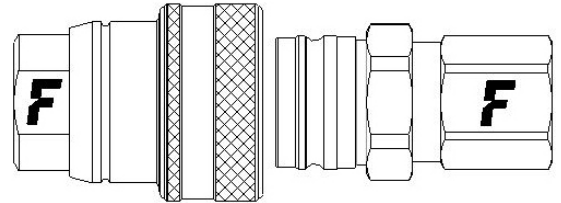

## Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
3/8	22	40	0,05	100	90	30	90

Seals	<b>NBR</b>
Material	<b>Steel</b>
Valve Type	<b>Flat</b>
Working temperatures	<b>-25 °C to 125 °C</b>
Surface treatment	<b>MATE 500 (CrIII)</b>
Series Interchange	<b>ISO 5676</b>
Connection	<b>Sleeve Retraction</b>
Disconnection	<b>Sleeve Retraction</b>
Connection Under Pressure	<b>Not Allowed</b>

