



VUC

Compact check valves

VUC series check-valves are very compact being them assembled with only one piece body. Standard cracking pressure 35 kPa.



Applications




Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/4	25	5					100
3/8	40	20					160
1/2	40	35					160
3/4	40	65					160
1	40	90					160

Seals	NBR
Material	Steel
Valve Type	Poppet
Working temperatures	-25 °C to 125 °C
Surface treatment	MATE 500 (CrIII)

Pressure Drop

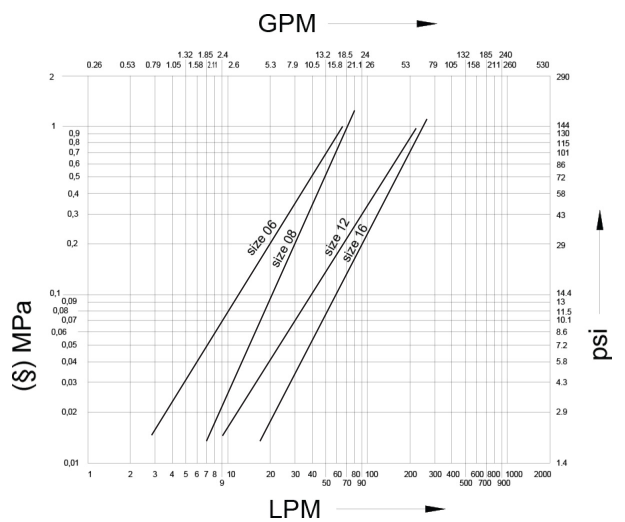

Data shown in the diagram are indicative and not binding.
 (§) 1 MPa = 10 bar. Dash size are specified.