


## VV

### Screw to connect standard couplings, double function sleeve.

VV series couplings are very robust and reliable and allow to connect under residual pressure. Thanks to a double function sleeve it's also possible to connect a female part with either VV or NV male halves. Faster proprietary profile.



### Applications

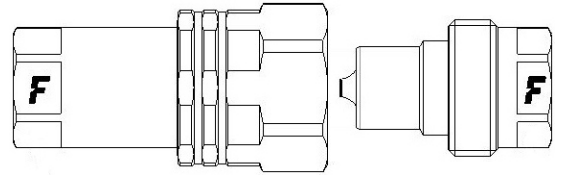

## Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
1/4	35	18	0,8		140	170	150
3/8	30	30	1,3		120	120	150
1/2	25	65	1,8		100	130	160
3/4	25	100	8		100	100	120
1	22	140	13		90	100	100

Seals	<b>NBR</b>
Material	<b>Steel</b>
Valve Type	<b>Poppet</b>
Working temperatures	<b>-25 °C to 125 °C</b>
Surface treatment	<b>MATE 500 (CrIII)</b>
Series Interchange	<b>FASTER</b>
Connection	<b>Screw to Connect</b>
Disconnection	<b>Unscrew to Disconnect</b>
Connection Under Pressure	<b>Allowed Residual</b>

