


## VVM

### Screw to connect standard couplings, metal-to-metal sealing

VVM couplings are characterized by screw-to-connect sleeve and metal-to-metal sealing system when disconnected. Poppet valve shut-off.



### Applications

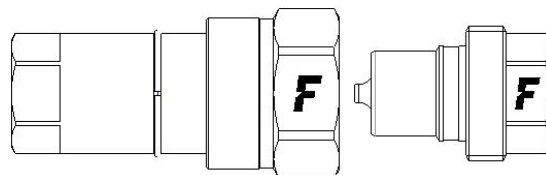

## Technical Specifications

Size (Inch)	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Force to Connect (N)	Burst pressure (MPa)		
					Male	Female	Male & Female
3/8	43	45	2		130	140	210

Seals	<b>NBR</b>
Material	<b>Steel</b>
Valve Type	<b>Poppet</b>
Working temperatures	<b>-25 °C to 125 °C</b>
Surface treatment	<b>MATE 500 (CrIII)</b>
Series Interchange	<b>FASTER</b>
Connection	<b>Screw to Connect</b>
Disconnection	<b>Unscrew to Disconnect</b>
Connection Under Pressure	<b>Not Allowed</b>

