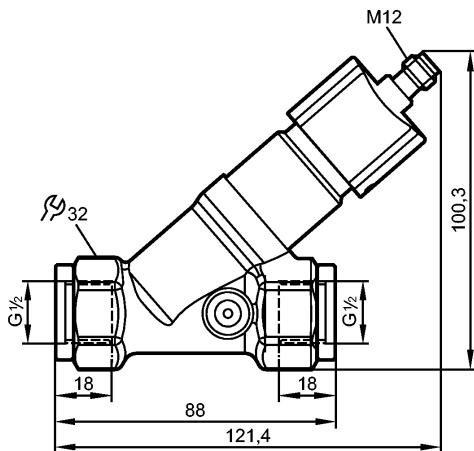


**SBG432**

SBG12HF010KG/US

**Flow sensors**

### Product characteristics

Flow transmitter  
with non-return valve  
Process connection: G 1/2  
Analog output  
Measuring range: 0.3...15 l/min

### Application

|                         |   |
|-------------------------|---|
| Application             | liquids (water, glycol solutions, oils, coolants) |
| Pressure rating [bar]   | 40  |
| Medium temperature [°C] | -10...100   |

### Electrical data

|                             |                          |
|-----------------------------|--------------------------|
| Electrical design           | DC                       |
| Operating voltage [V]       | 18...32 DC; to SELV/PELV |
| Current consumption [mA]    | < 35                     |
| Protection class            | III                      |
| Reverse polarity protection | yes                      |

### Outputs

|                          |           |
|--------------------------|-----------|
| Output function          | analog    |
| Short-circuit protection | yes       |
| Overload protection      | yes       |
| Analog output            | 4...20 mA |
| Max. load [Ω]            | 500       |

### Measuring / setting range

|                 |         |          |
|-----------------|---------|----------|
| Measuring range | [l/min] | 0.3...15 |
|-----------------|---------|----------|

### Accuracy / deviations

|                                      |     |
|--------------------------------------|-----|
| Repeatability [% of the final value] | 1   |
| Accuracy [% of the final value]      | ± 5 |




# SBG432

SBG12HF010KG/US



Flow sensors

Pressure loss ( $dP$ ) / flow rate ( $Q$ )

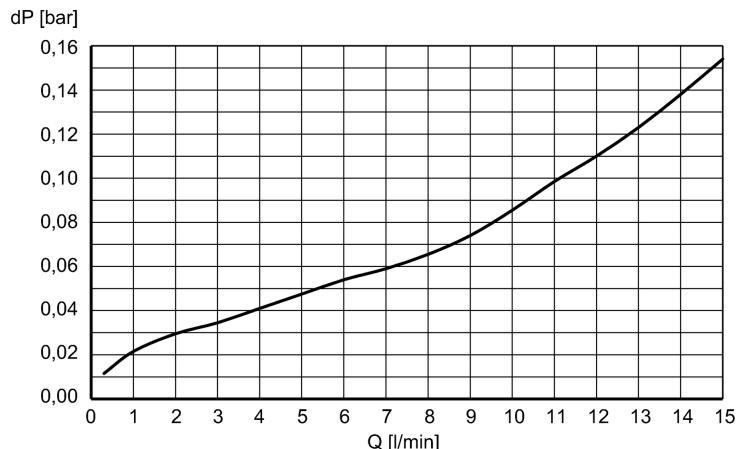

## Reaction times

|               |     |        |
|---------------|-----|--------|
| Response time | [s] | < 0.01 |
|---------------|-----|--------|

## Environment

|                     |      |               |
|---------------------|------|---------------|
| Ambient temperature | [°C] | 0..60         |
| Storage temperature | [°C] | -15...80      |
| Protection          |      | IP 65 / IP 67 |

## Tests / approvals

|                      |  |
|----------------------|--|
| EMC                  | DIN EN 61000-6-2<br>DIN EN 61000-6-3     |
| Shock resistance     | DIN EN 60068-2-27      20 g (11 ms)      |
| Vibration resistance | DIN EN 60068-2-6      5 g (10...2000 Hz) |

## Mechanical data



|                          |   |
|--------------------------|---|
| Process connection       | G 1/2   |
| Materials (wetted parts) | stainless steel 316 / 1.4401; brass; brass chemically nickel-plated; PP; PPS; O-ring: FKM |
| Housing materials        | brass chemically nickel-plated; PP; stainless steel 316L / 1.4404; aluminum anodized; PA  |
| Switching cycles min.    | 10 million  |
| Weight                   | [kg] 0.556  |

## Electrical connection

|            |               |
|------------|---------------|
| Connection | M12 connector |
|------------|---------------|

## Wiring

|             |       |
|-------------|-------|
| Core colors |       |
| BN          | brown |
| BU          | blue  |
| WH          | white |



Colours to DIN EN 60947-5-2

## Remarks

|         |  |
|---------|--|
| Remarks | Use of 200 micron filtration is recommended.<br>All data refer to water (20 °C). |
|---------|--|

|               |         |   |
|---------------|---------|---|
| Pack quantity | [piece] | 1 |
|---------------|---------|---|