




SBN434

SBN34HF010KG/US



Flow sensors

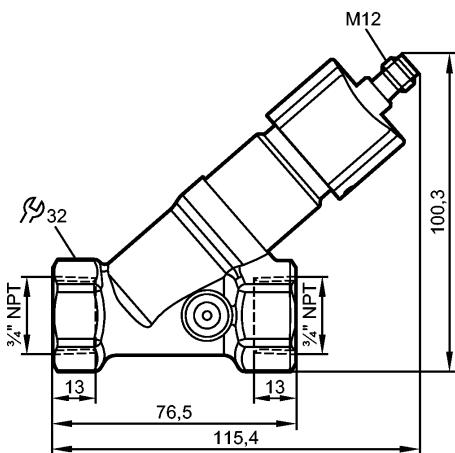

CE

Product characteristics

Flow transmitter
with non-return valve
Process connection: 3/4" NPT
Analog output
Measuring range: 0.2...10 gpm

Application

Application	liquids (water, glycol solutions, oils, coolants)
Pressure rating [bar]	40
Medium temperature [°C]	-10...100

Electrical data

Electrical design	DC
Operating voltage [V]	18...32 DC; to SELV/PELV
Current consumption [mA]	< 35
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	analog
Short-circuit protection	yes
Overload protection	yes
Analog output	4...20 mA
Max. load [Ω]	500

Measuring / setting range

Measuring range [gpm]	0.2...10
-----------------------	----------

Accuracy / deviations

Repeatability [% of the final value]	1
Accuracy [% of the final value]	± 5



SBN434


SBN34HF010KG/US



Flow sensors

Pressure loss (dP) / flow rate (Q)

dP [kPa]

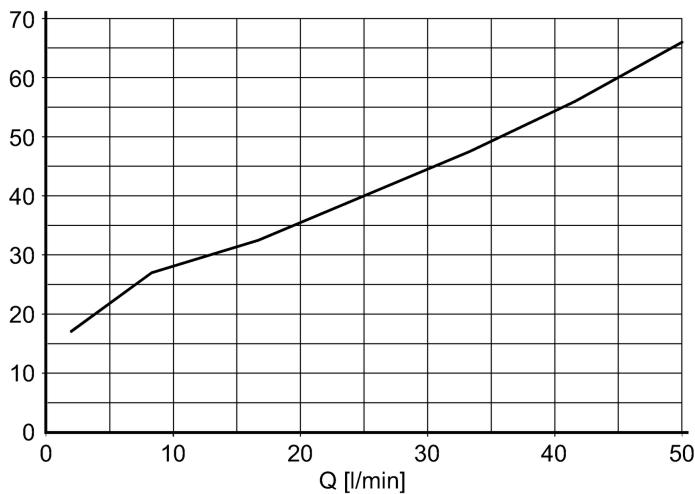

Reaction times

Response time	[s]	< 0.01
---------------	-----	--------

Environment

Ambient temperature	[°C]	0...60
---------------------	------	--------

Storage temperature	[°C]	-15...80
---------------------	------	----------

Protection		IP 65 / IP 67
------------	--	---------------

Tests / approvals

EMC	DIN EN 61000-6-2 DIN EN 61000-6-3
-----	--------------------------------------

Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
------------------	-------------------	--------------

Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
----------------------	------------------	--------------------

Mechanical data

Process connection	3/4" NPT
--------------------	----------

Materials (wetted parts)	stainless steel 316 / 1.4401; brass; brass chemically nickel-plated; PP; PPS; O-ring: FKM
--------------------------	---

Housing materials	brass chemically nickel-plated; PP; stainless steel 316L / 1.4404; aluminum anodized; PA
-------------------	--

Switching cycles min.	10 million
-----------------------	------------


Weight	[kg]	0.476
--------	------	-------

Electrical connection

Connection	M12 connector
------------	---------------

Wiring

Core colors	
BN	brown
BU	blue
WH	white



Colours to DIN EN 60947-5-2

Remarks

Remarks	Use of 200 micron filtration is recommended. All data refer to water (20 °C).
---------	--



SBN434

SBN34HF010KG/US



Flow sensors

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — SBN434 — 05.05.2015