

Combination pumps

Type SKP

LP: 100 bar/4,45 to 16,71 cm³/rev
HP: 700 bar/0,45 to 2,71 cm³/rev

Features

- Compact design
- Self-venting
- Various combinations possible




Design

- Integrated low-pressure unloading valve
- Integrated fail safe valve (not suitable for continuous operation, must not be used to restrict the system pressure!)
- With hollow shaft for direct assembling of motor without bell housing and coupling

Applications

- For applications that require high flow rates in the low pressure (LP) range and low flow rates in the high pressure (HP) range
- Presses
- Power units for industrial applications such as punching machines and rescue devices
- Not suited for pulsation



Technical Data

Hydraulic fluid	Mineral oil according to DIN 51524 (other fluids on request)
Fluid temperature range	-20 up to 80 °C
Ambient temperature range	-30 to 50 °C
Viscosity range	12 to 220 mm ² /s
Max. operating pressure HP	700 bar
Max. operating pressure LP	100 bar (preset by producer)
Suction pressure	-0,2 bar up to +0,5 bar (relative)
Filtration (recommendation)	According to NAS 1638 class 6 resp. ISO/DIN 4406 17/15/12
Weight	See product information
Installation position	In oil reservoir (vertical)
Radial force / Axial force onto driving shaft	Not allowed
Max. speed	2000 rpm
Direction of rotation	Clockwise
Suction height	Max. 400 mm
Material	Excentric shaft and valve block: steel Pump housing and gear pump: cast aluminium

Type SKP

LP: 100 bar/4,45 to 16.71 cm³/U
HP: 700 bar/0,45to 2,71 cm³/U


Ordering code

Example	SKP	03	-	0,45	-	700	-	4,45	-	100	V	-			00
Combination pumps													Special design 01 ... 99 (00 for Standard)		
Size	03 04 05														
Displacement HP [cm³/rev]	see product information														
Max. operating pressure HP [bar]	see product information														
Displacement LP [cm³/rev]	see product information														
Max. operating pressure LP [bar]	see product information														
Seal material	V [FPM] other seal materials on request														
													Part index Please leave it blank (small letters a-z; different letters do not effect interchangeability)		
													Design revision see dimension drawings (capital letters A-Z; identical letters equal same connecting dimensions)		

Type SKP

LP: 100 bar/4,45 to 16.71 cm³/U
HP: 700 bar/0,45 to 2,71 cm³/U

Mounting

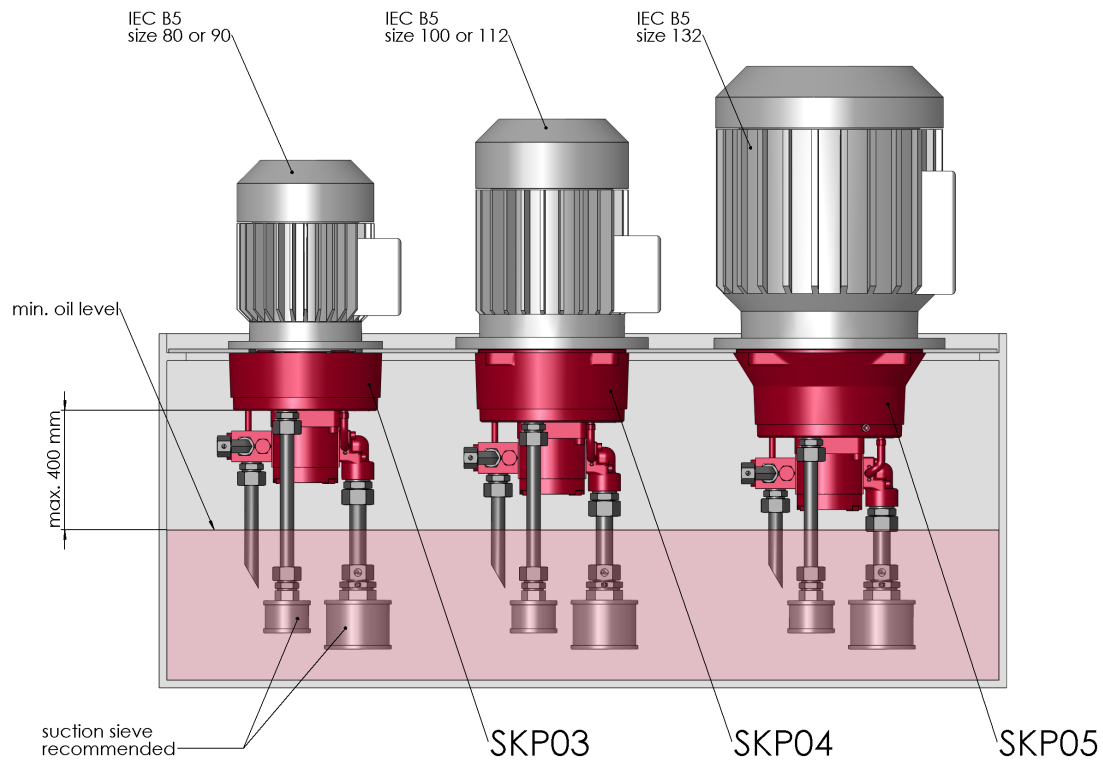

Type SKP
LP: 100 bar/4,45 to 16,71 cm ³ /U HP: 700 bar/0,45to 2,71 cm ³ /U

Product information


Type	HP mode		LP mode			Number of pumping elements [HP]	Motor size acc. DIN 42677	Weight ca. [kg]	Part No.
	Displace- ment HP [cm ³ /rev]	max. operating pressure [bar]	Displace- ment LP [cm ³ /rev]	Displace- ment HP+LP [cm ³ /rev]	max. cut-out pressure [bar]				
03	0,45	700	4	4,45	100	2	80	9,2	4002174
03	0,80	700	6	6,80	100	2	90	9,3	3973268
03	0,80	700	8	8,80	100	2	90	9,5	4002179
04	1,26	700	6	7,26	100	2	100	9,9	3999420
04	1,53	700	6	7,53	100	2	112	9,9	3999422
04	1,53	700	8	9,53	100	2	112	10,0	4002459
04	1,53	700	14	15,53	100	2	112	10,2	4002190
04	1,88	700	14	15,88	100	3	112	10,4	4002192
04	2,16	700	6	8,16	100	3	112	10,1	4002194
04	2,16	700	8	10,16	100	3	112	10,2	4002195
04	2,16	700	14	16,16	100	3	112	10,4	4002196
05	2,71	700	6	8,71	100	3	132	10,3	4002198
05	2,71	700	14	16,71	100	3	132	10,6	4002199

Other combinations on request



Type SKP

LP: 100 bar/4,45 to 16.71 cm³/U
HP: 700 bar/0,45 to 2,71 cm³/U



Driving motor power and torque

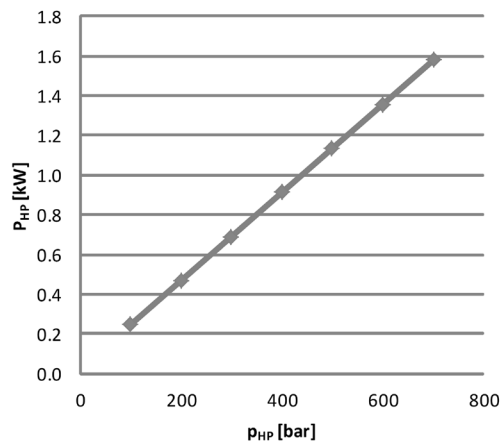


SKP03-0,45-700-4,45-100-

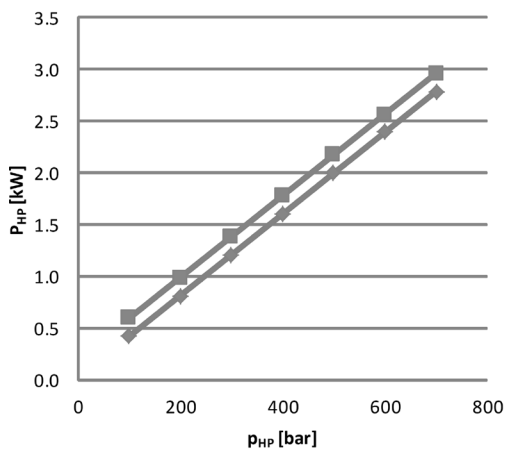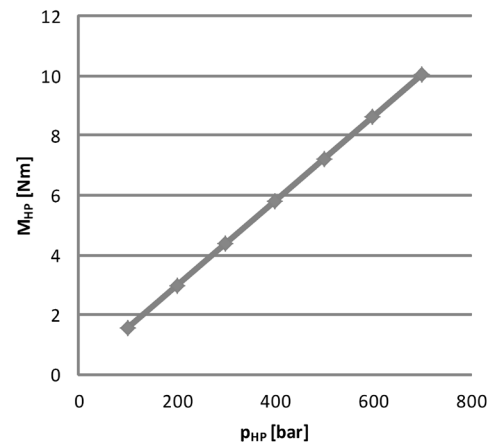

SKP03-0,80-700-6,80-100-
SKP03-0,80-700-8,80-100-



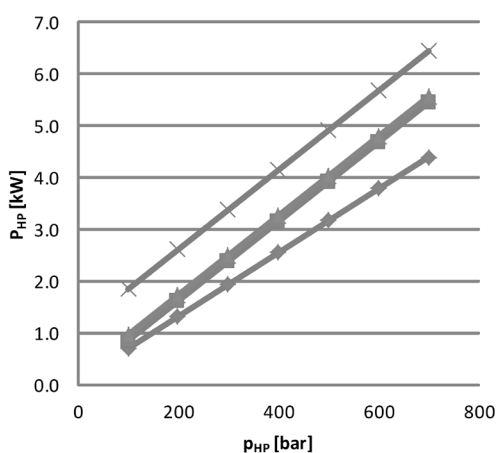
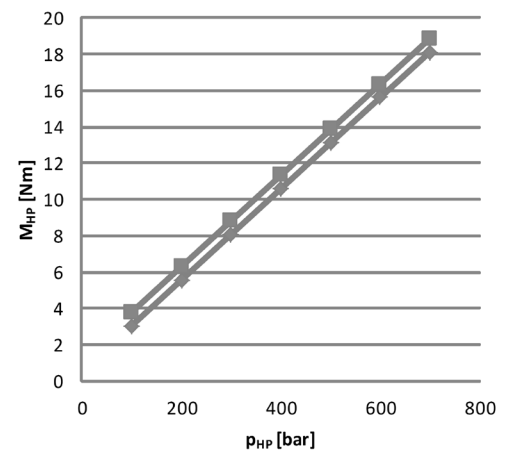


SKP04-1,26-700-7,26-100-
SKP04-1,53-700-7,53-100-
SKP04-1,53-700-9,53-100-
SKP04-1,53-700-15,53-100-

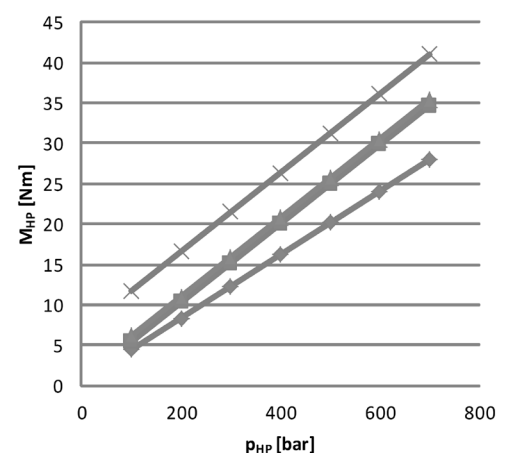


Type SKP

LP: 100 bar/4,45 to 16.71 cm³/U
HP: 700 bar/0,45to 2,71 cm³/U

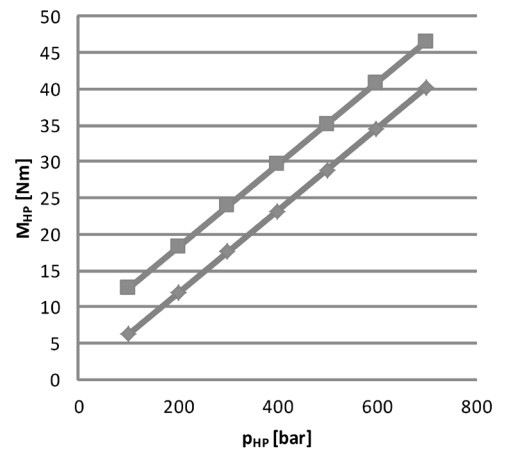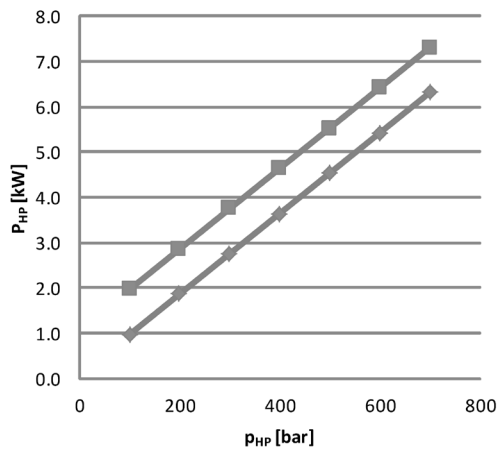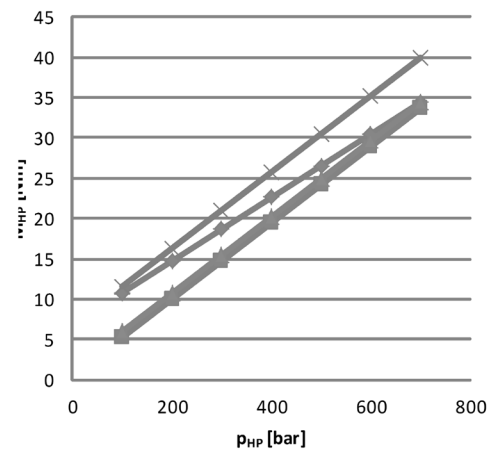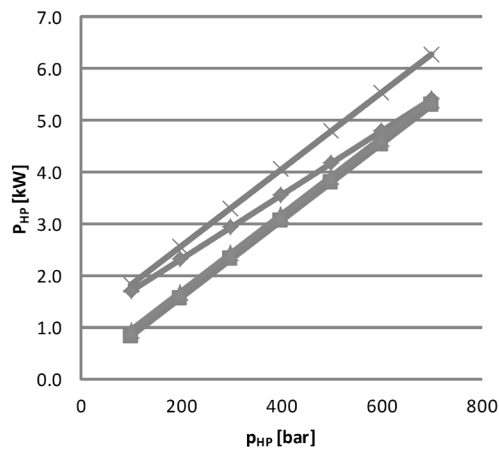


Hydraulic schematics



Dimensional drawings

Size SKP03 for electric motor IEC-size 80 / Design revision B

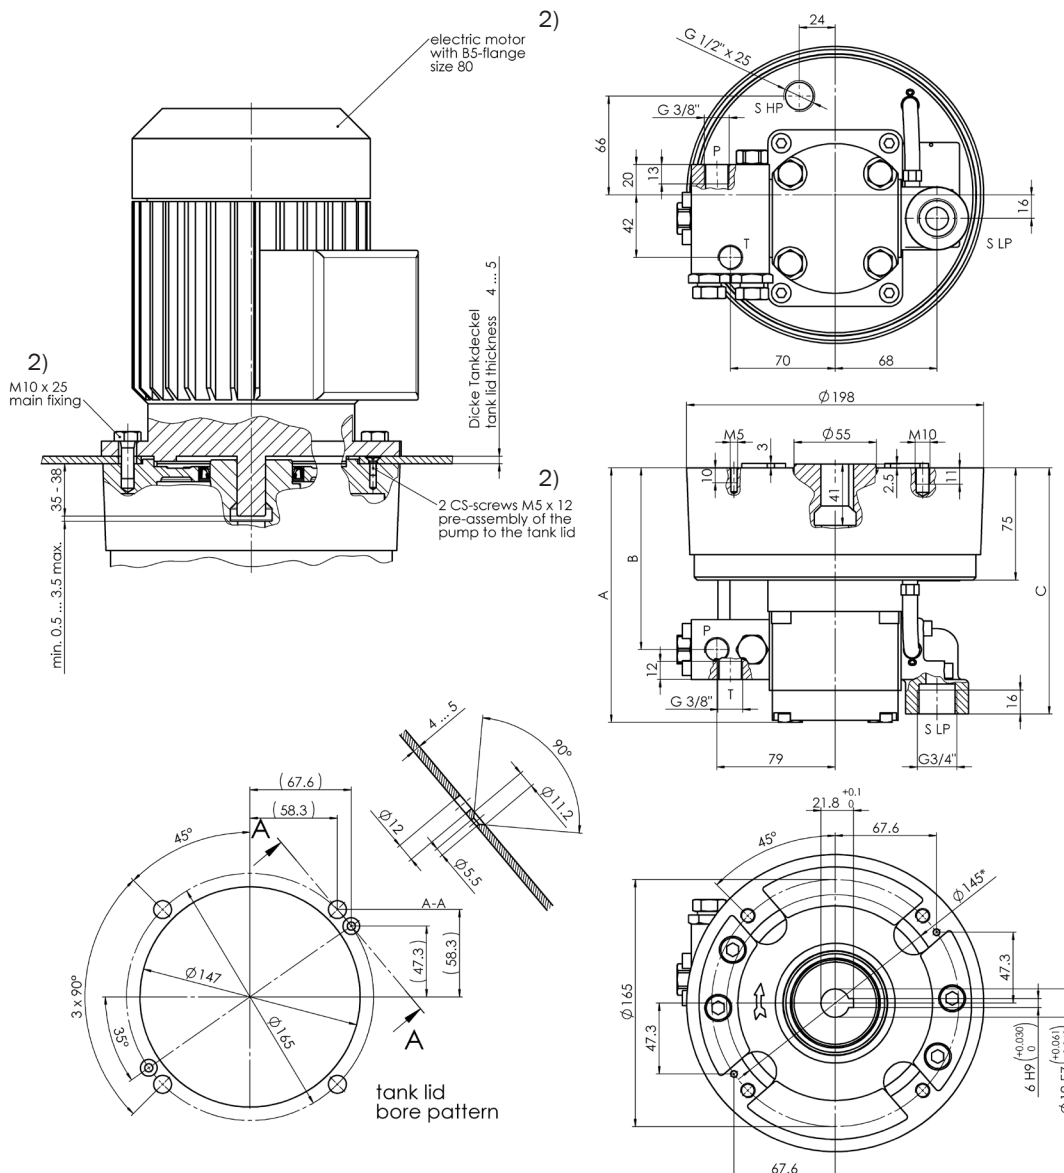

2) Not included in the scope of supplier


Installation dimensions low-pressure pump (LP)

Displacement low-pressure pump [cm ³ /rev]	A	B	C
	[mm]		
4	170.0	121.4	164.4

Type SKP

LP: 100 bar/4,45 to 16.71 cm³/U
HP: 700 bar/0,45 to 2,71 cm³/U

Size SKP03 for electric motor IEC-size 90 / Design revision B

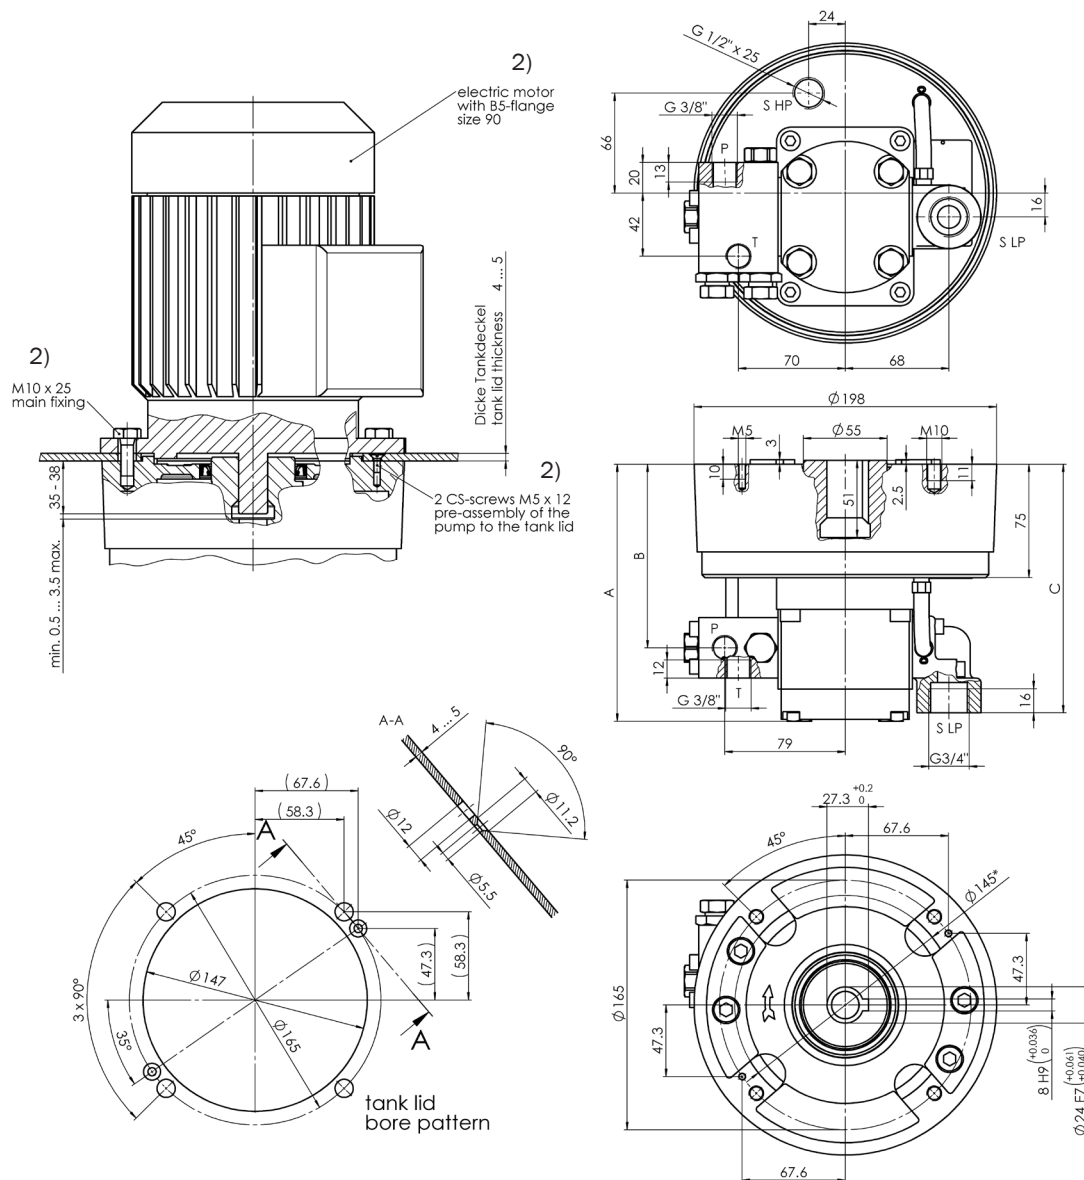

2) Not included in the scope of supplier

Installation dimensions low-pressure pump (LP)

Displacement low-pressure pump [cm³/rev]	A	B	C
	[mm]		
4	170.0	121.4	164.4
6	173.3	123.0	166.0
8	177.5	125.1	168.1

2)

electric motor with B5-flange size 100L or 112M

2)

2 CS-screws M5 x 12 pre-assembly of the pump to the tank lid

min. 0.5 ... 3.5 max.

54 ... 57

5 ... 6

5 ... 6

90°

Ø11.2

Ø5.5

Ø14

A-A

63.4

(76)

45°

Ø192

Ø215

3 x 90°

81.2

(76)


tank lid bore pattern

Displacement low pressure pump [cm ³ /rev]	A	B	C
		[mm]	
4	185.0	136.4	179.4
6	188.3	138.0	181.0
8	192.5	140.1	183.1
14	201.6	144.7	187.7

Type SKP

LP: 100 bar/4,45 to 16.71 cm³/U
HP: 700 bar/0,45 to 2,71 cm³/U

Size SKP05 for electric motor IEC-size 132 / Design revision B

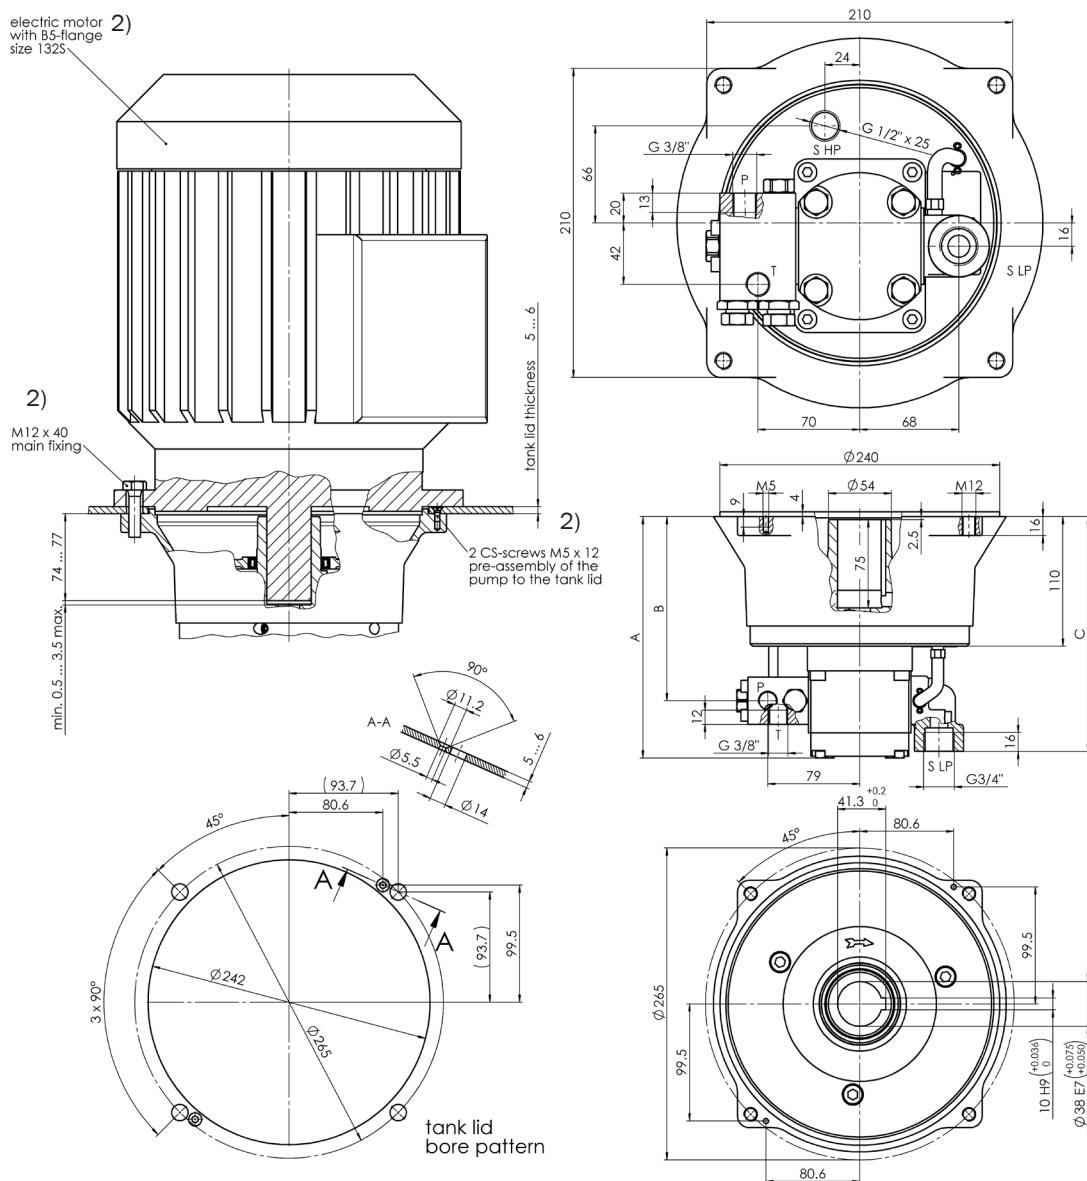


2) Not included in the scope of supplier

Installation dimensions low-pressure pump (LP)

Displacement low pressure pump [cm³/rev]	A	B	C
	[mm]		
4	205.0	156.4	199.4
6	208.3	158.0	201.0
8	212.5	160.1	203.1
14	221.6	164.7	207.7


Functional schematic

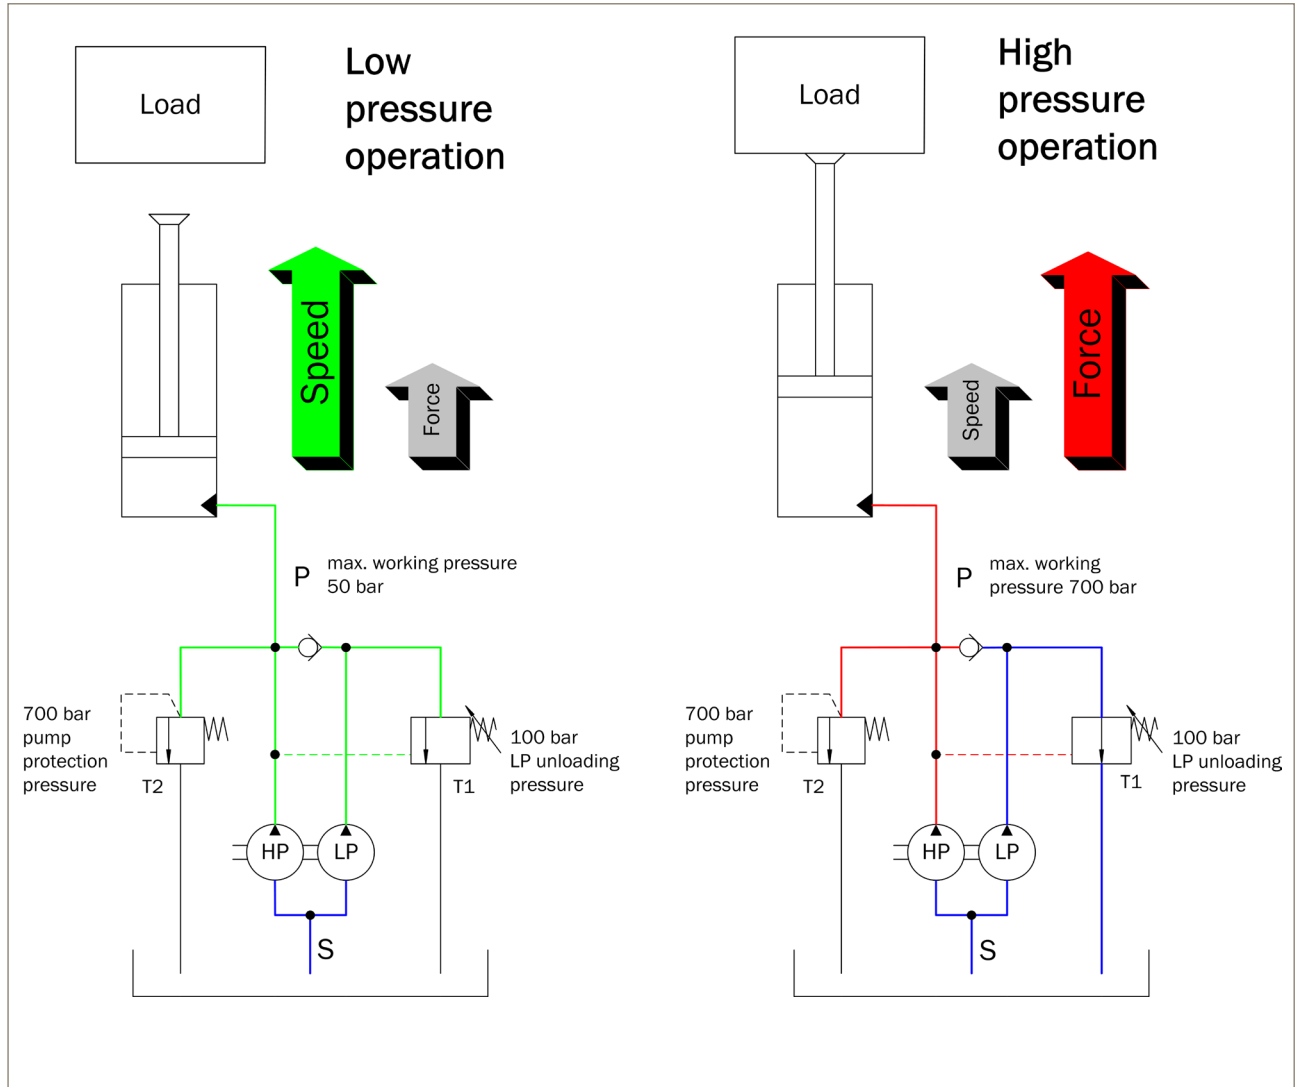

Type SKP

LP: 100 bar/4,45 to 16.71 cm³/U
HP: 700 bar/0,45 to 2,71 cm³/U

Pressure diagram

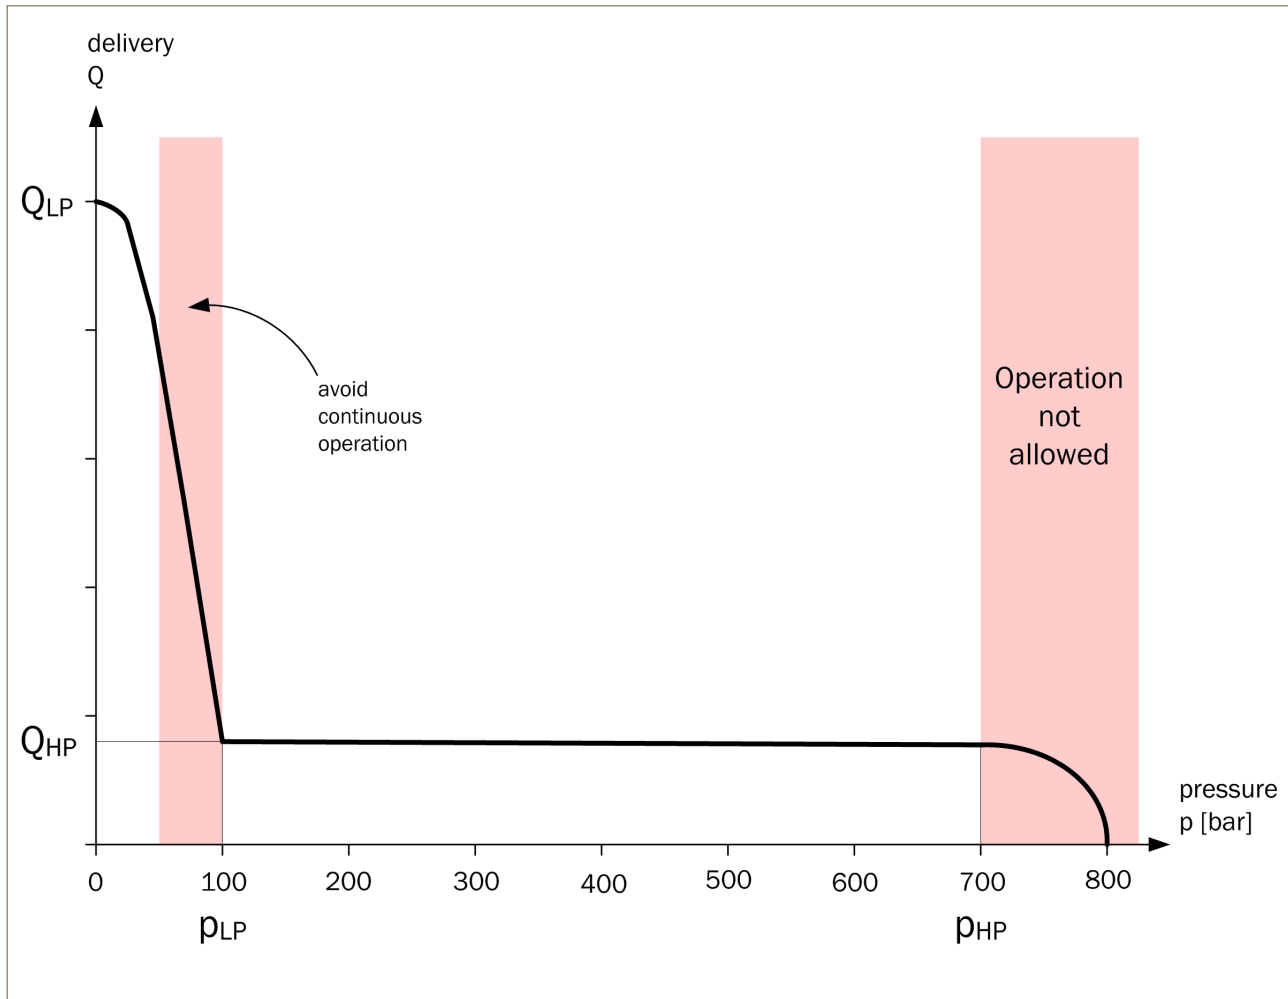

Bieri Hydraulik AG

Könizstrasse 274
CH-3097 Liebefeld
Tel. +41 31 970 09 09 | Fax +41 31 970 09 10
info@bieri hydraulics.com | www.bieri hydraulics.com

The information in this brochure relates to the operating conditions and applications described.

For applications and operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.