




SM2100

SMR21XGXFRKG/US



Flow sensors

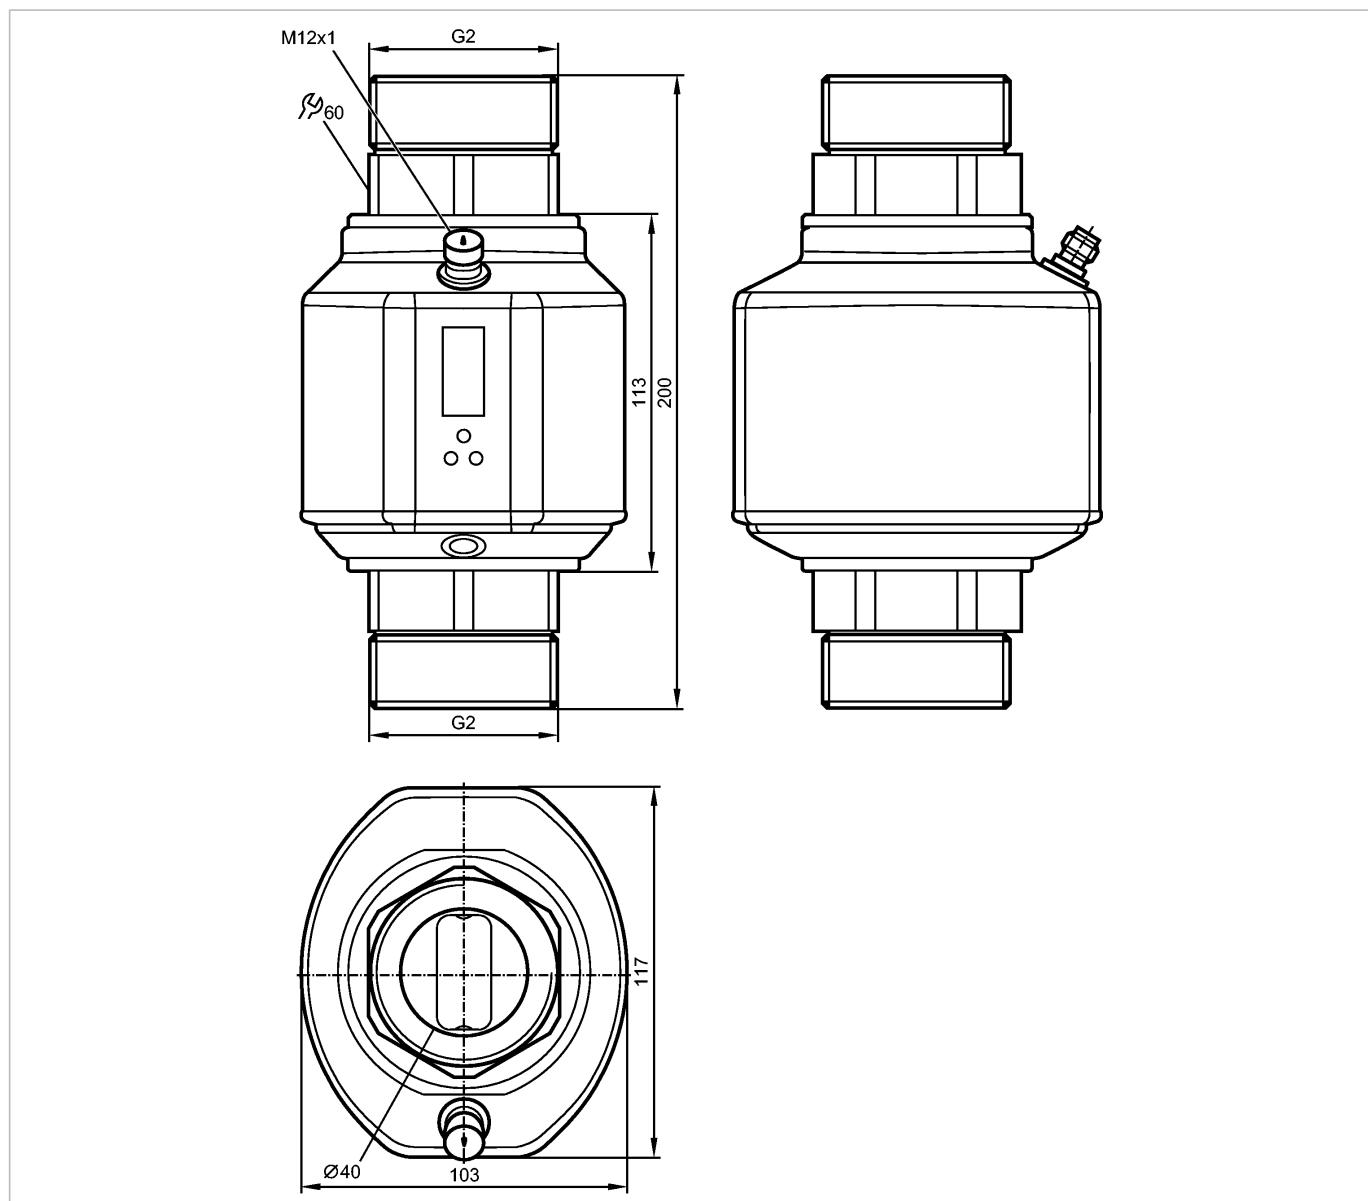

ACS CE cUL us IO-Link
LISTED

Product characteristics

Magnetic-inductive flow meter

Quick disconnect

Process connection: G2 flat seal

connection to pipe by means of an adapter

Function programmable

Totalizer function

Empty pipe detection

2 outputs

OUT1 = flow monitoring (binary), flow rate meter (pulse), preset meter (binary)

OUT2 = flow monitoring or temperature monitoring (analog or binary)

Input for counter reset

4-digit alphanumeric display

Measuring range

5...600 l/min

Application



SM2100

SMR21XGXFRKG/US



Flow sensors

Application	conductive liquids of the fluid group 2 according to the Pressure Equipment Directive (PED) (conductivity: $\geq 20 \mu\text{S}/\text{cm}$ / viscosity: $< 70 \text{ mm}^2/\text{s}$ at 40°C)	
Pressure rating	[bar]	16
Medium temperature	[°C]	-10...70
Electrical data		
Electrical design		DC PNP/NPN
Operating voltage	[V]	18...32 DC ¹⁾
Current consumption	[mA]	< 150
Insulation resistance	[MΩ]	> 100 (500 V DC)
Protection class		III
Reverse polarity protection		yes
Outputs		
Output function		OUT1: normally open / normally closed programmable or pulse or frequency or empty pipe detection or IO-Link OUT2: normally open / normally closed programmable or analogue (4...20 mA; 0...10 V, scalable) or empty pipe detection
Current rating	[mA]	2 x 250
Voltage drop	[V]	< 2
Short-circuit protection		yes (non-latching)
Overload protection		yes
Analog output		4...20 mA; 0...10 V
Max. load	[Ω]	500 (4...20 mA)
Min. load	[Ω]	2000 (0...10 V)
Pulse output		flow rate meter
Frequency range [Hz]		0.1...10000
Measuring / setting range		
Empty pipe detection		normally closed / open
Flow monitoring		
Measuring range	5...600 l/min	0.3...36 m ³ /h
Display range	-720...720 l/min	-43.2...43.2 m ³ /h
Resolution	0.5 l/min	0.02 m ³ /h
Set point, SP	8...600 l/min	0.5...36 m ³ /h
Reset point, rP	5...597 l/min	0.3...35.8 m ³ /h
Analog start point, ASP	0...480 l/min	0...28.8 m ³ /h
Analog end point, AEP	120...600 l/min	7.2...36 m ³ /h
Flow end point, FEP	20...600 l/min; 1.2...36 m ³ /h	
Low flow cut-off, LFC	5...15 l/min	0.3...0.9 m ³ /h
in steps of	0.5 l/min	0.02 m ³ /h
Frequency end point, FrEP	0.01...10 kHz	
in steps of	10 Hz	
Measuring dynamics	1:120	
Volumetric flow quantity monitoring		
Pulse value	0.0001...600x10 ³ m ³	
in steps of	0.0001 m ³	
Pulse length	[s]	0.008...2
Temperature monitoring		



SM2100

SMR21XGXFRKG/US




Flow sensors

Measuring range	[°C]	-20...80
Display range	[°C]	-40...100
Resolution	[°C]	0.2
Set point, SP	[°C]	-19.2...80.0
Reset point, rP	[°C]	-19.6...79.6
Analog start point, ASP	[°C]	-20...60
Analog end point, AEP	[°C]	0...80
in steps of	[°C]	0.2

Accuracy / deviations

Flow monitoring	
Accuracy	± (0.8% MW + 0.5% MEW) ²⁾

Repeatability	± 0.2% MEW
---------------	------------

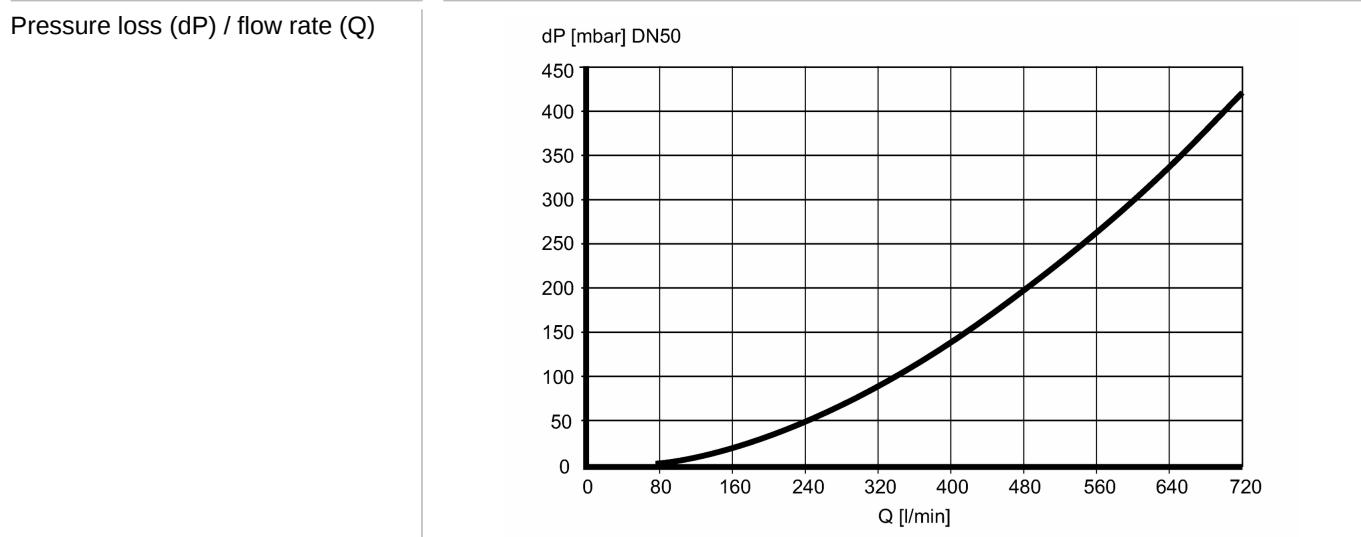

Temperature monitoring	
Accuracy	± 1 (bei 25 °C, Q > 15 l/min)
Temperature drift	± 0.0333 °C / K

Reaction times

Power-on delay time	[s]	5
---------------------	-----	---

Flow monitoring	
-----------------	--

Start-up delay	[s]	0...50
----------------	-----	--------

Response time	[s]	< 0.35 (dAP = 0)
---------------	-----	------------------

Damping, dAP	[s]	0...5
--------------	-----	-------

Temperature monitoring	
------------------------	--

Response time	[s]	T09 = 3 (Q > 15 l/min)
---------------	-----	------------------------

Software / programming

Programming options	Hysteresis / window; NO / NC; output logic; current / voltage / frequency / pulse output; start-up delay; display can be deactivated; display unit; empty pipe detection
---------------------	--

Interfaces

IO-Link Device	
----------------	--

Transfer type	COM2 (38.4 kBaud)
---------------	-------------------

IO-Link revision	1.1
------------------	-----

SDCI standard	IEC 61131-9 CDV
---------------	-----------------

IO-Link Device ID	357 d / 00 01 65 h
-------------------	--------------------

Profiles	Smart Sensor: Process Data Variable; Device Identification
----------	--



SM2100

SMR21XGXFRKG/US



Flow sensors

SIO mode		yes
Required master port class		A
Process data analogue		3
Process data binary		2
Min. process cycle time [ms]		5

Environment

Ambient temperature [°C]		-10...60
Storage temperature [°C]		-25...80
Protection		IP 65 / IP 67

Tests / approvals

Pressure equipment directive		article 3, section 3 - sound engineering practice
EMC		DIN EN 60947-5-9
Shock resistance		DIN EN 60068-2-27 20 g (11 ms)
Vibration resistance		DIN EN 60068-2-6 5 g (10...2000 Hz)
MTTF [Years]		78

Mechanical data

Process connection		G2 flat seal
Materials (wetted parts)		stainless steel 316L / 1.4404; stainless steel 316Ti / 1.4571; PEEK (polyether ether ketone); Hastelloy C-4 (2.4610); Centellen; EPDM
Housing materials		stainless steel 316L / 1.4404; stainless steel 316Ti / 1.4571; PEI; FKM; PBT-GF 20; elastolan
Weight [kg]		3.062

Displays / operating elements


Display	Display unit 6 x LED green (l/min, m³/h, l, m³, 10³, °C) Switching status 2 x LED yellow Measured values 4-digit alphanumeric display Programming 4-digit alphanumeric display
---------	---

Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

Wiring

Core colors	
BK	black
BN	brown
BU	blue
WH	white

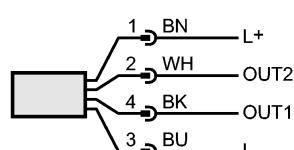

Colours to DIN EN 60947-5-2

OUT1: 6 options:

- switching output empty pipe detection
- switching output flow rate monitoring
- frequency output flow rate monitoring
- pulse output quantity meter
- signal output preset counter
- IO-Link

OUT2: 6 options:

- switching output empty pipe detection
- switching output flow rate monitoring
- switching output temperature monitoring



SM2100

SMR21XGXFRKG/US



Flow sensors

analogue output flow rate
analogue output temperature
Input for counter reset

Accessories

Accessories (included)

2 x packing washer (Centellen); Label

Remarks

Remarks

¹⁾ to DIN EN 50178, SELV, PELV
²⁾ Q > 15l/min, medium and ambient temperature +22 °C ± 4 K
MW = measured value
MEW = final value of the measuring range

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — SM2100 — 26.08.2014