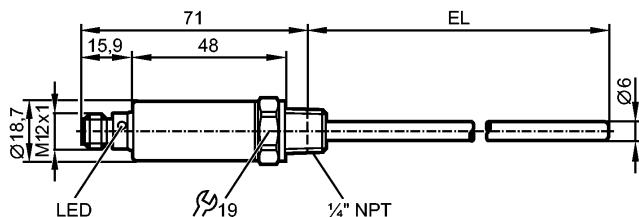


**TA2633**

TA100FLEN14-A-ZVG/US

Temperature sensors

**Product characteristics**

Temperature transmitter

Quick disconnect

Process connection: 1/4" NPT

Installation length EL: 100 mm

Analog output 4...20 mA

Measuring range: -58...302 °F

Measuring element: 1 x Pt 1000, to DIN EN 60751, class A

Factory setting: 0...300 °F

Application

Application

liquids and gases

Pressure rating [bar] 160; only applies to the sensor; for installation in adapters the indications in the adapter data sheet shall apply

Electrical data

Electrical design DC

Operating voltage [V] 18...32 DC; cULus - Class 2 source required

Current consumption [mA] < 50

Protection class III

Reverse polarity protection yes

Outputs

Output function 4...20 mA analog

Short-circuit protection yes

Overload protection yes

Analog output 4...20 mA

Max. load [Ω] 250 (18...19 V); 300 (19...32 V)

Measuring / setting range

Measuring range °F -58...302

Factory setting 0...300 °F

Resolution

Analog output [K] ≤ 0.04

Accuracy / deviations

Analog output [K] ± 0.3 + (± 0.1 % MS)

Temperature coefficients (in % of the span per 10 K) 0.1

Reaction times

Power-on delay time [s] 1

Dynamic response T05 / T09 [s] 1 / 3

**TA2633**

TA100FLEN14-A-ZVG/US

Temperature sensors

Interfaces

IO-Link Device

Transfer type

COM2 (38.4 kBaud)

IO-Link revision

1.1

Environment

Ambient temperature

[°C]

-25...80

Storage temperature

[°C]

-40...100

Protection

IP 67 / IP 68 / IP 69K

Tests / approvals

EMC

DIN EN 61000-6-2

Shock resistance

DIN IEC 68-2-27:

50 g (11 ms)

Vibration resistance

DIN IEC 68-2-6:

20 g (10...2000 Hz)

MTTF

[Years]

572

UL approval number

K002

Mechanical data

Process connection

1/4" NPT

Materials (wetted parts)

stainless steel 316L / 1.4404; O-ring: FKM

Probe diameter

[mm]

6

Installation length EL

[mm]

100

Housing materials

stainless steel 316L / 1.4404; PEI; FKM

Weight

[kg]

0.096

Displays / operating elements


Display

operating status 1 x LED green

Electrical connection

Connection

M12 connector; gold-plated contacts

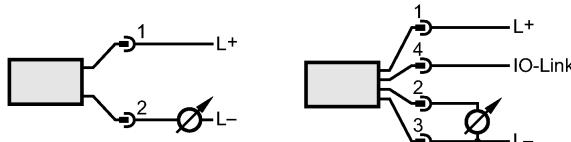Wiring**Remarks**

Remarks

MS = set measuring span

Pack quantity

[piece]

1