


**TM4911**

TM-050KFEC02- /US/

Temperature sensors

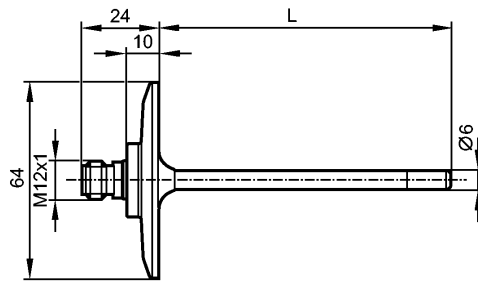

L = probe length (corresponds to installation length EL)



**Product characteristics**

Temperature sensor for connection to a control monitor with a max. operating voltage of 32 V
Quick disconnect
Process connection: Clamp 2"
Installation length EL: 50 mm
gold-plated contacts
Connection to control monitor TP / TR
Measuring range: -40...150 °C / -40...302 °F
Measuring element: 1 x Pt 100, to DIN EN 60751, class A

**Application**

Application	liquids and gases (especially for application in hygienic systems)	
Pressure rating [bar]	25	
Minimum installation depth [mm]	15	

**Electrical data**

Connection to control monitor	TP / TR
Protection class	III

**Measuring / setting range**

Measuring range	-40...150 °C	-40...302 °F
-----------------	--------------	--------------

**Accuracy / deviations**

Accuracy	$\pm (0.15 K + 0.002 \times  t )$
----------	-----------------------------------

**Reaction times**

Dynamic response T05 / T09 [s]	1 / 3 *)
--------------------------------	----------

**Environment**

Ambient temperature [°C]	-25...80
Protection	IP 68 / IP 69K

**Tests / approvals**

Shock resistance	DIN EN 60068-2-2-27:	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF [Years]	22831	

**Mechanical data**

Process connection	Clamp 2"
Materials (wetted parts)	stainless steel 316L / 1.4404; surface characteristics: Ra < 0.8 / electropolished
Probe diameter [mm]	6
Probe length L [mm]	50
Installation length EL [mm]	50

**TM4911**

TM-050KFEC02- /US/


**Temperature sensors**

Housing materials	stainless steel 316L / 1.4404
Weight [kg]	0.231

**Electrical connection**

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

**Wiring**



**Remarks**

Remarks	cULus - Class 2 source required *) according to DIN EN 60751 The values for accuracy apply to flowing water.
---------	--

Pack quantity [piece]	1
-----------------------	---