


**TS2452**

TS-200KLKD06 .../US

Temperature sensors

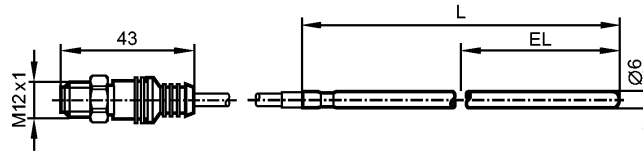

**Product characteristics**

Temperature sensor for connection to evaluation units
Ø 6 mm
Cable with connector
Installation length EL: 100 **) mm
Connection to control monitor TP / TR
Measuring range: -100...600 °C / -148...1112 °F
Measuring element: 1 x Pt 100, to DIN EN 60751, class A

**Application**

Application	liquids and gases
Minimum installation depth [mm]	15

**Electrical data**

Connection to control monitor	TP / TR
Protection class	III

**Measuring / setting range**

Measuring range	-100...600 °C	-148...1112 °F
-----------------	---------------	----------------

**Accuracy / deviations**

Accuracy	± (0.15 K + 0.002 x  t )
----------	--------------------------

**Reaction times**

Dynamic response T05 / T09 [s]	12 / 34 *)
--------------------------------	------------

**Environment**

Protection	IP 67
------------	-------

**Mechanical data**

Materials (wetted parts)	stainless steel 316Ti / 1.4571
Probe diameter [mm]	6
Probe length L [mm]	150
Installation length EL [mm]	100 **)
Housing materials	stainless steel 316Ti / 1.4571; PFA/PTFE
Weight [kg]	0.086

**TS2452**


TS-200KLKD06 .../US

**Temperature sensors**

**Electrical connection**

Connection	PTFE cable / 2 m; temperature-resistant up to 250°C, with M12 connector
------------	---

**Wiring**



**Remarks**

Remarks	<p>The values for accuracy apply to flowing water.                  *) according to DIN EN 60751                  **) Für Medientemperaturen &lt; 200°C: Einbaulänge EL = Stablänge L</p>
---------	---

Pack quantity	[piece]	1
---------------	---------	---