


**TT3250**

TT-300KBBD06- /US/ /V

Temperature sensors

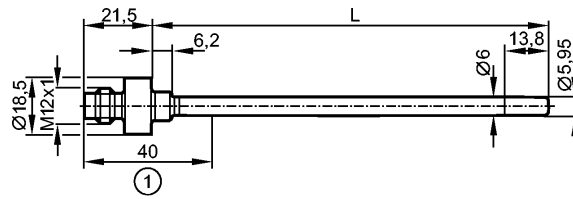

1: plug area  
L = probe length (corresponds to installation length EL)



**Product characteristics**

Temperature sensor for connection to evaluation units
Quick disconnect
Installation length EL: 360 mm
gold-plated contacts
Connection to control monitor TP / TR
Measuring range: -40...150 °C / -40...302 °F
Measuring element: 1 x Pt 1000, to DIN EN 60751, class A

**Application**

Application	liquids and gases
Pressure rating [bar]	160
Minimum installation depth [mm]	15

**Electrical data**

Connection to control monitor	TP / TR
Protection class	III

**Measuring / setting range**

Measuring range	-40...150 °C	-40...302 °F
-----------------	--------------	--------------

**Accuracy / deviations**

Accuracy	± (0.15 K + 0.002 x  t )
----------	--------------------------

**Reaction times**

Dynamic response T05 / T09 [s]	1 / 3 *)
--------------------------------	----------

**Environment**

Ambient temperature [°C]	-25...80, for the plug area
Protection	IP 68 / IP 69K

**Tests / approvals**

Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF [Years]	22831	

**Mechanical data**

Materials (wetted parts)	stainless steel 316L / 1.4404	
Probe diameter [mm]	6	
Probe length L [mm]	360	
Installation length EL [mm]	360	
Housing materials	stainless steel 316L / 1.4404	
Weight [kg]	0.067	

**Electrical connection**


**TT3250**

TT-300KBBD06- /US/ /V

**Temperature sensors**

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

**Wiring**



**Remarks**

Remarks	*) according to DIN EN 60751 The values for accuracy apply to flowing water.
---------	---

Pack quantity	[piece]	1
---------------	---------	---