


VALVES FOR HYDRAULIC MOTORS

CONTENTS


Valves for MLHP, MLHR and MLHH type KPBR ...	35
Valves for MLHS type KPBS	36
Valves for MLHT type KPBT	37
Valves for MLHV type KPBV	38
Valves for MLHRW and HW type KPBW	39
Valves for HP and HR type KPBHR...E	40
Valves for HP and HR type KPBHR...D	41
Switch valves type KPWR and KPWS	42
Switch valves type KPWT and KPWW	43

Crossover Relief Valves	44
Valves for MLHP, MLHR and MLHH type KP...R ...	45
Valves for MLHS type KP...S	45
Valves for MLHT type KP...T	46
Valves for MLHV type KP...V	48
Valves for MLHRW and HW type KP...W ...	51
Cross Port Relief Valves	52
Order Code	53


OVERCENTER VALVES WITH BRAKE CONTROL



Single Overcenter Valves
with Brake Control
type KPBR ... AE



Single Overcenter Valves
with Brake Control
type KPBR ... BE



Dual Overcenter Valves
with Brake Control
type KPBR ... D


SPECIFICATION DATA

Parameters		Type											
		KPBR...E	KPBS...E	KPBR...D	KPBS...D	KPBW...E	KPBW...D	KPBHR...E	KPBHR...D	KPBT...E	KPBT...D	KPBV...E	KPBV...D
Flow Rate, GPM [lpm]		15.85 [60]								26.4 [100]		52.8 [200]	
Rated PSI Pressure*, [bar]		870÷4060 [60÷280]						1015÷3625 [70÷250]					
Pilot Ratio		4,25:1											
Weight, lb [kg]		6.658 [3,020]	6.39 [2,900]	6.746 [3,060]	6.437 [2,920]	7.724 [3,050]	6.923 [3,140]	5.071 [2,300]	5.291 [2,400]	11.905 [5,400]	12.787 [5,800]	20.283 [9,200]	21.495 [9,750]


*Pressure Settings are at flow rate of 1.3 GPM [5 lpm] and viscosity 150 SUS [32 mm²/s] at 122°F [50 °C].

PRESSURE LOSSES


KPBR..., KPBS..., KPBW... and KPBHR...

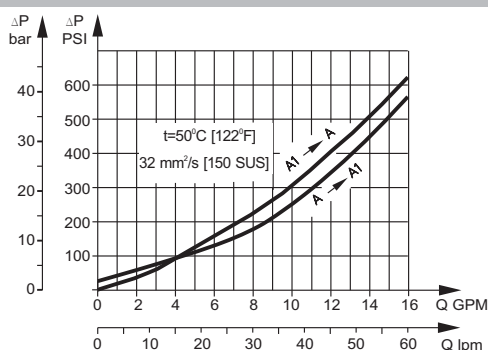

KPBT...

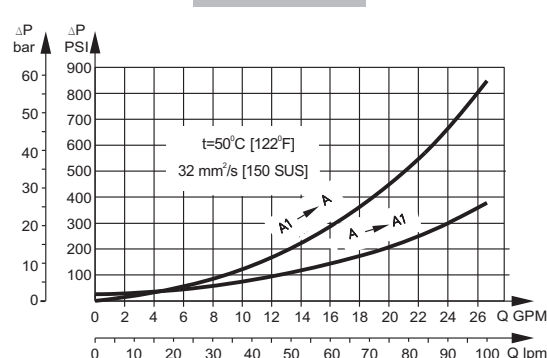


KPBV...

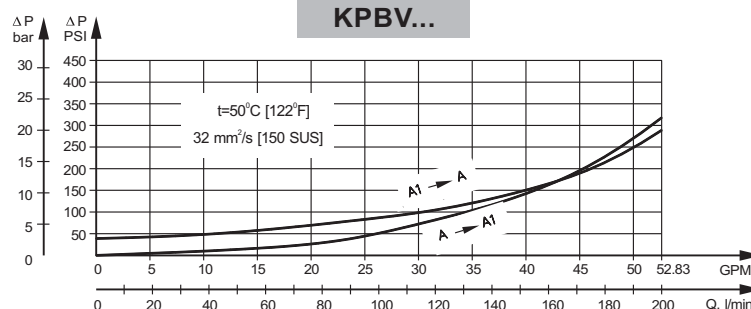


VALVES FOR MLHS HYDRAULIC MOTORS

SINGLE VALVE KPBS-250/1/E...

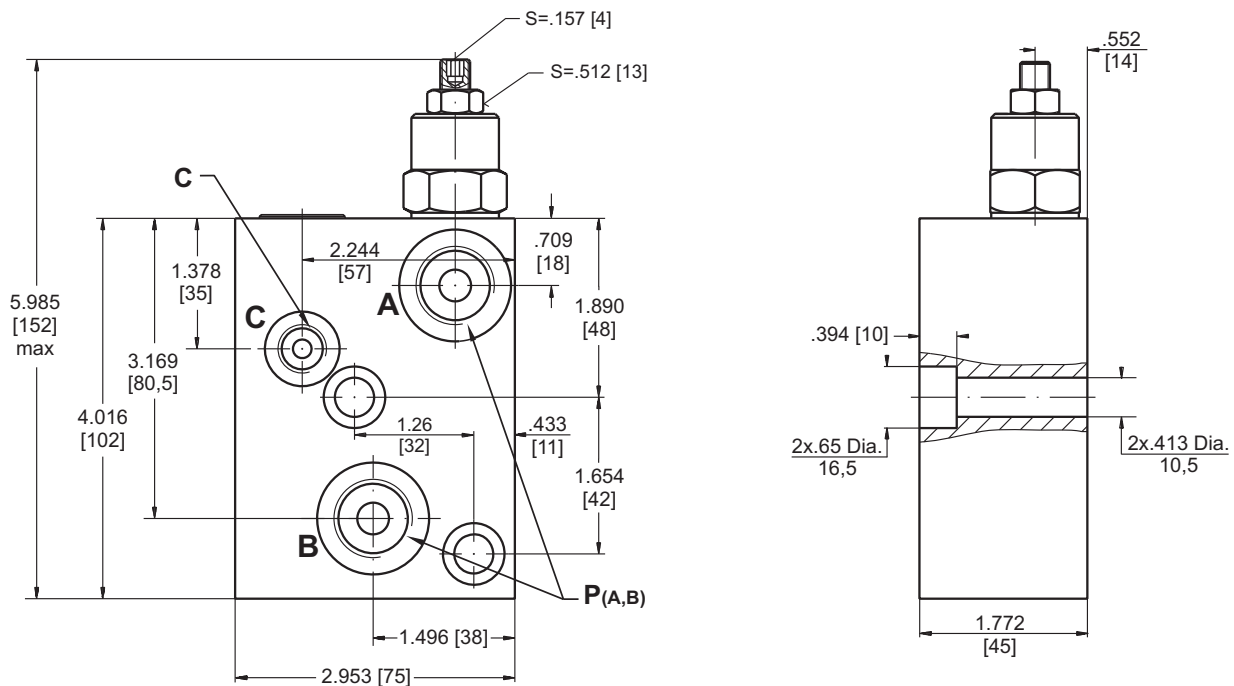

DUAL VALVE KPBS-250/1/D...

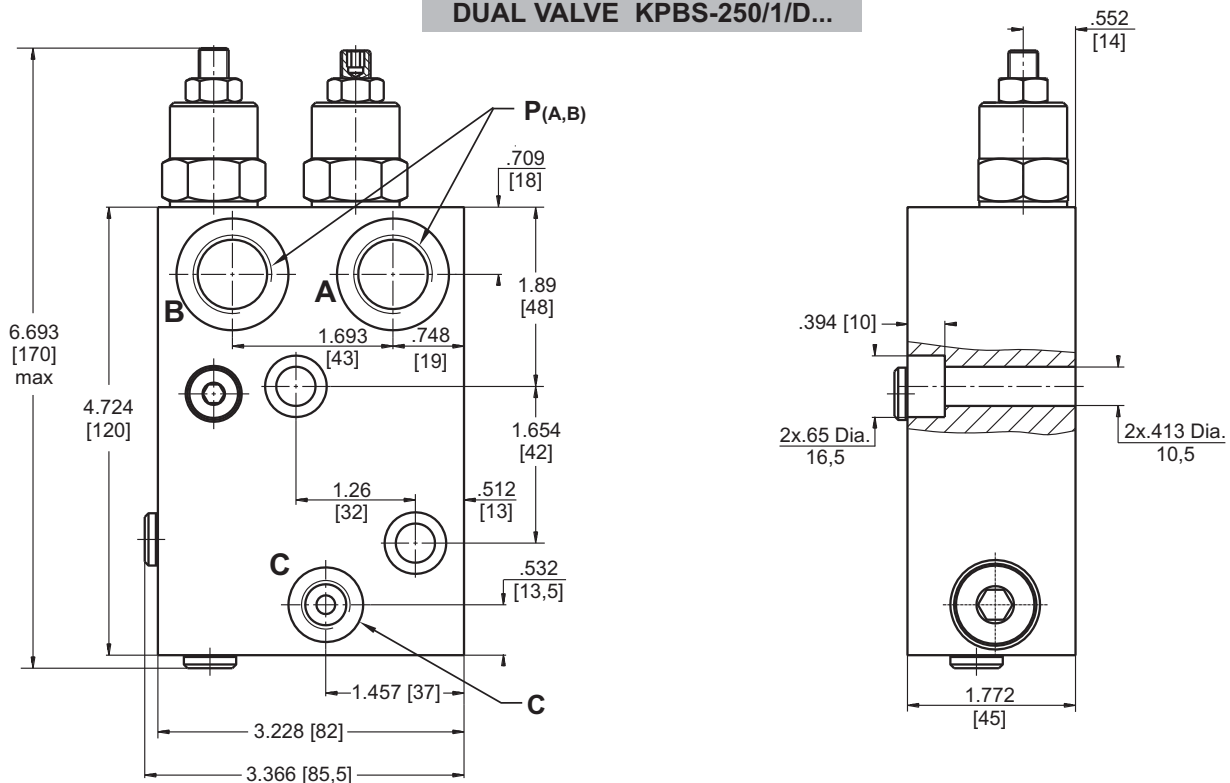



	Thread Ports - P _(A,B)	Thread Port - C
-	G1/2 .63 [16] depth	G1/4 .47 [12] depth
M	M22x1,5 .63 [16] depth	M14x1,5 .47 [12] depth
A	7/8 - 14 UNF O-ring .63 [16] depth	7/16 - 20 UNF O-ring .50 [12,7] depth





Note : KPBS Blocks are installed directly on MLHS Motors with two screws 3/8-16UNC, 1.75 long ANSI B 18.3 or M10x45 - 8.8 DIN 912. Tightening torque 336÷310 in-lb [3,5^{+0,3} daNm].

VALVES FOR MLHT HYDRAULIC MOTORS

SINGLE VALVE KPBT-250/1/E...

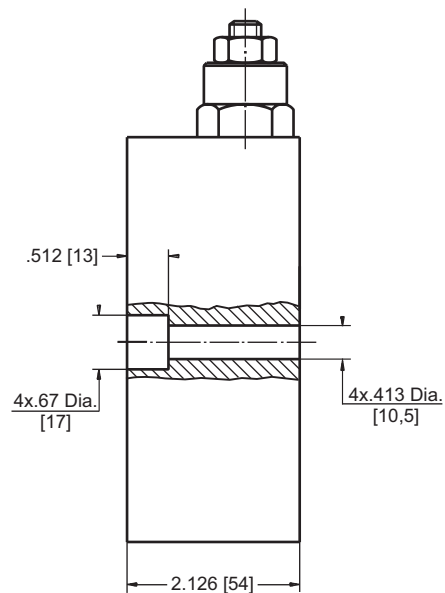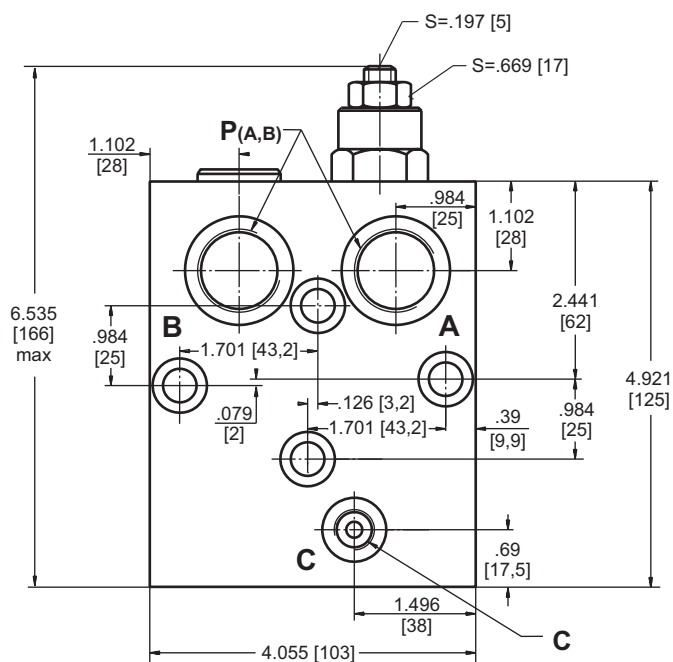

DUAL VALVE KPBT-250/1/D...

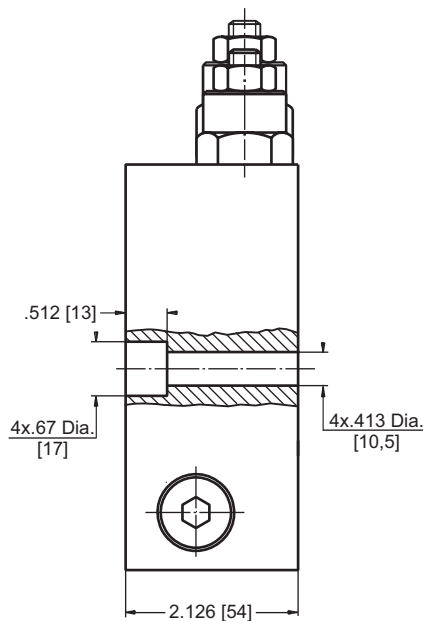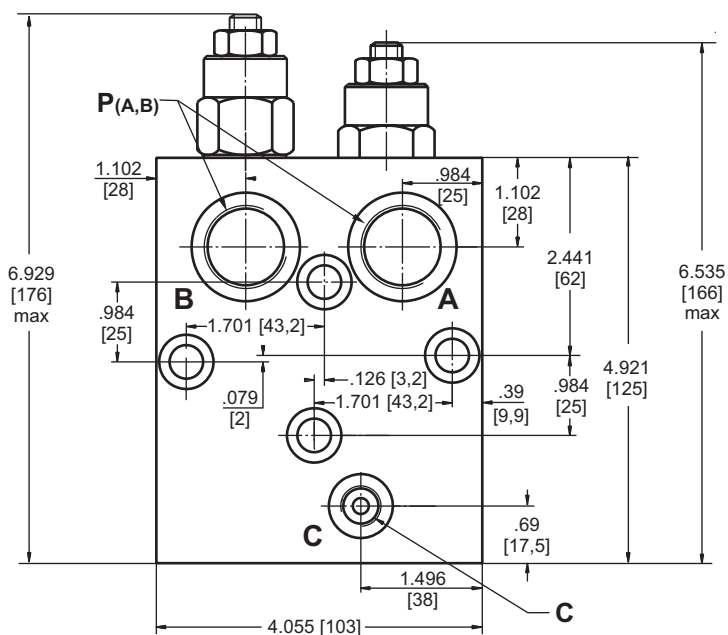


	Thread Ports - P _(A,B)	Thread Port - C
-	G3/4 .75 [19] depth	G1/4 .47 [12] depth
M	M27x2 .75 [19] depth	M14x1,5 .47 [12] depth
A	1 1/16-12 UN O-ring .75 [19] depth	7/16 - 20 UNF O-ring .50 [12,7] depth




Note : KPBT Blocks are installed directly on MLHT Motors with four screws M10x50 - 8.8 DIN 912. Tightening torque 336±310 lb-in [3,5^{+0,3} daNm].

VALVES FOR MLHV HYDRAULIC MOTORS


DUAL VALVE KPBV-250/1/D...

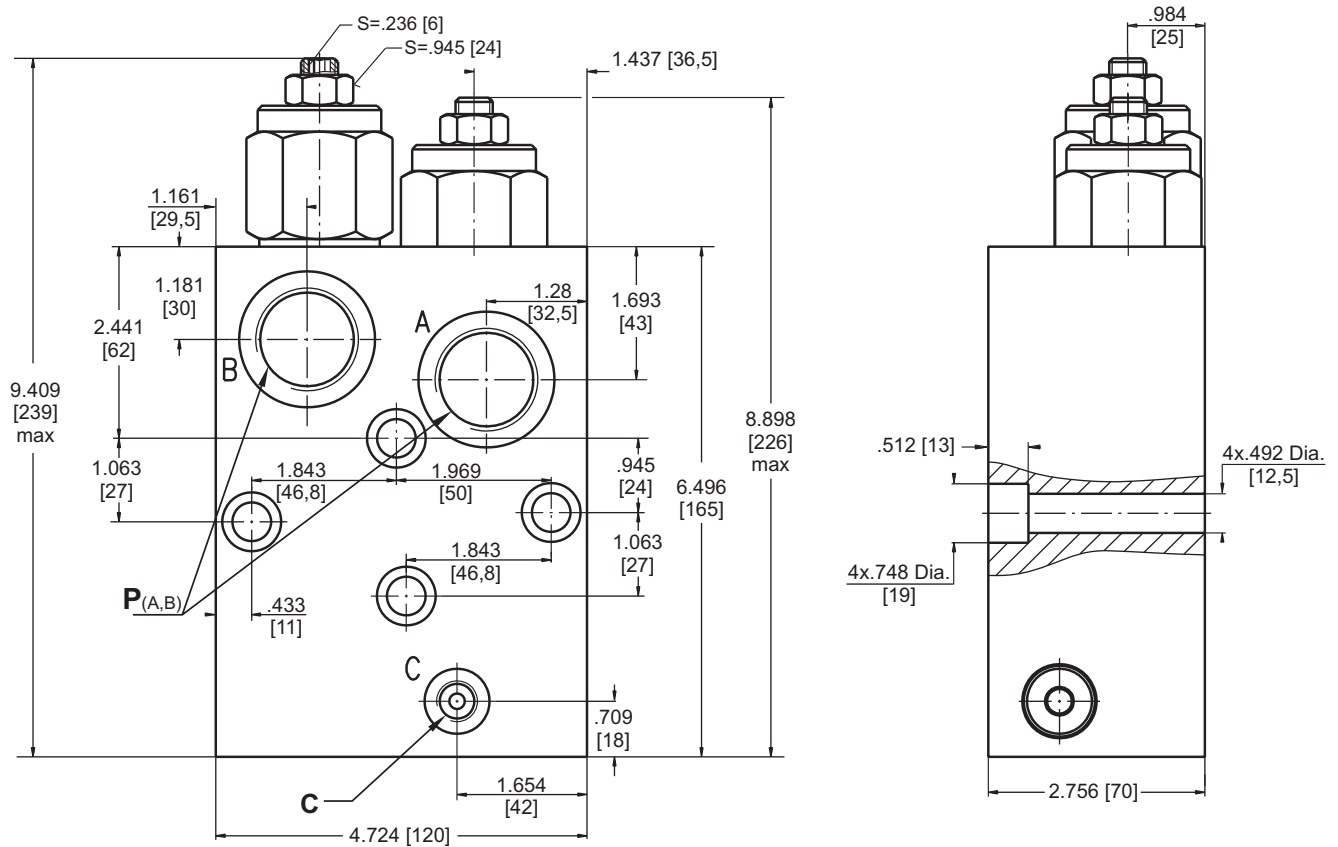

SINGLE VALVE KPBV-250/1/AE...

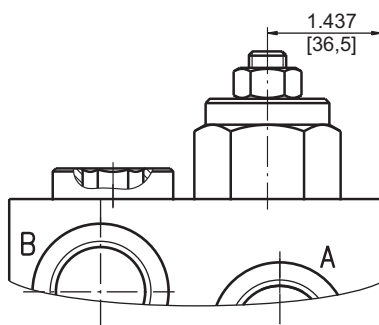

SINGLE VALVE KPBV-250/1/BE...

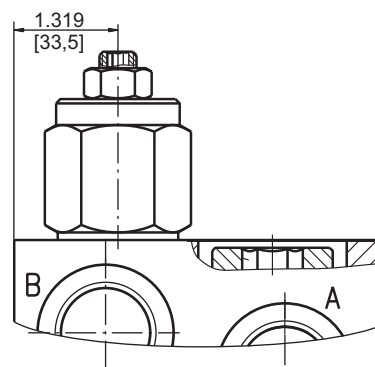



	Thread Ports - P _(A,B)	Thread Port - C
-	G 1 .79 [20] depth	G1/4 .55 [14] depth
M	M33x2 .79 [20] depth	M14x1,5 .55 [14] depth
A	1 5/16 - 12 UN O-ring .79 [20] depth	7/16 - 20 UNF O-ring .5 [12,7] depth




Note : KPBV Blocks are installed directly on MLHV Motors with four screws M12x70 - 8.8 DIN 912. Tightening torque 620±575 lb-in [6,5^{+0,5} daNm].

VALVES FOR MLHRW and HW HYDRAULIC MOTORS


DUAL VALVE KPBW-250/1/D...

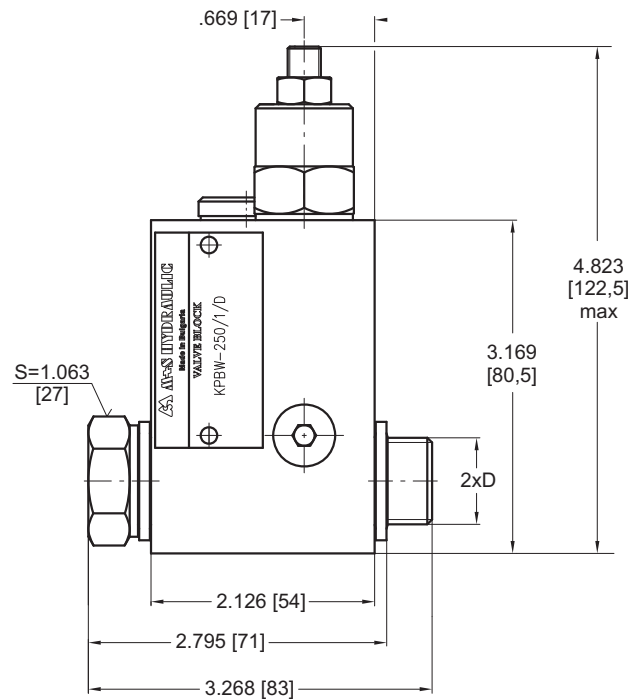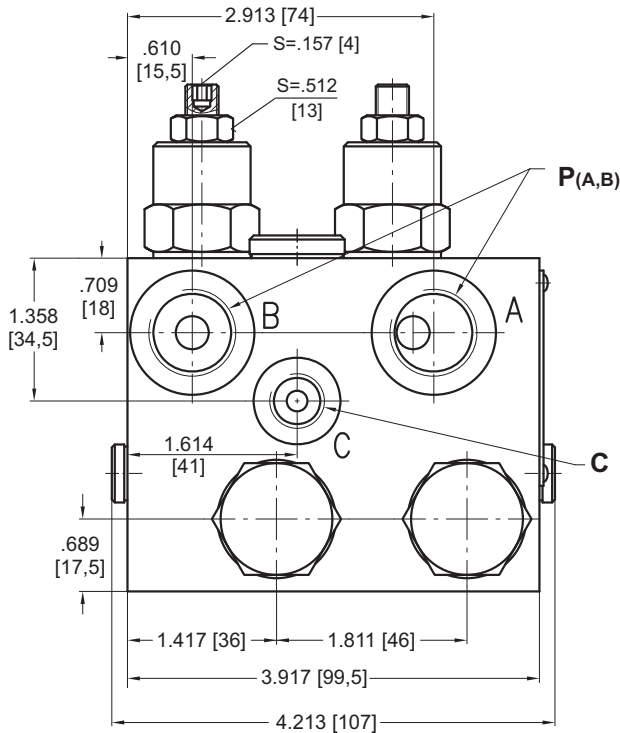


KPBW-...A

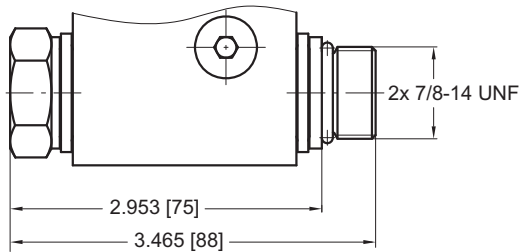

SINGLE VALVE KPBW-250/1/AE...

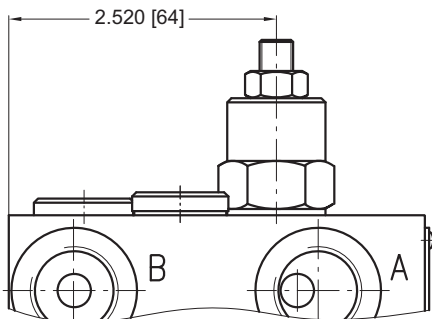

SINGLE VALVE KPBW-250/1/BE...

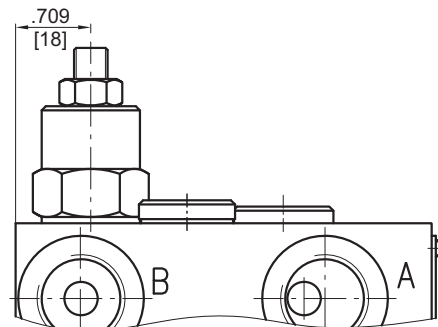


	Thread Ports - P _(A,B)	Thread Port - C	Thread Ports - D
-	G1/2 .63 [16] depth	G1/4 .47 [12] depth	G1/2 .47 [12] length
M	M22x1,5 .63 [16] depth	M14x1,5 .47 [12] depth	M22x1,5 .47 [12] length
A	7/8 - 14 UNF O-ring .63 [16] depth	7/16 - 20 UNF O-ring .50 [12,7] depth	7/8 - 14 UNF O-ring .51 [13] length








Note : KPBW Blocks assembly to MLHRW or HW motors is done with two screws (thread D) included in the valve set. Tightening torque 710 lb-in [8 daNm].

VALVES FOR HP, HR HYDRAULIC MOTORS

SINGLE VALVE KPBHR-250/1/BE...

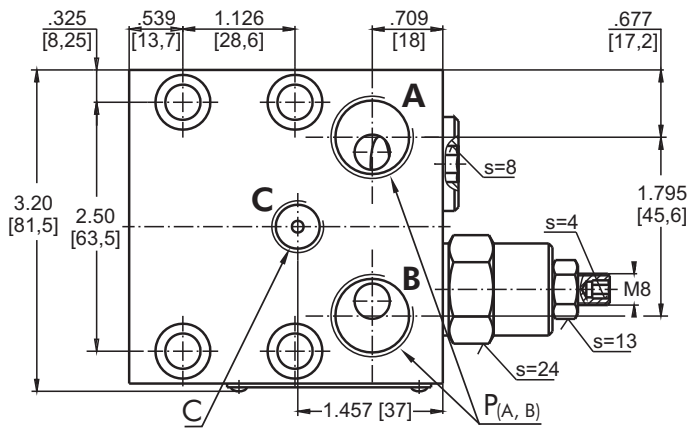

SINGLE VALVE KPBHR-250/1/AE...

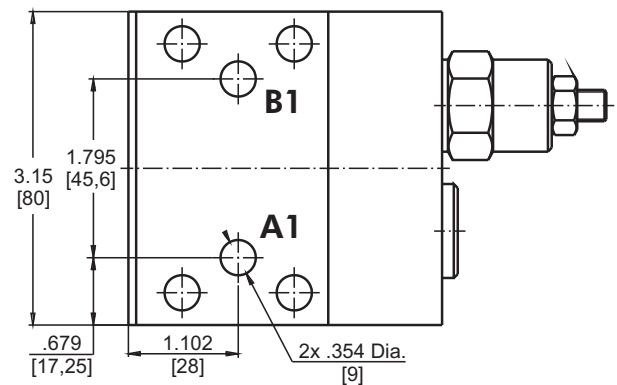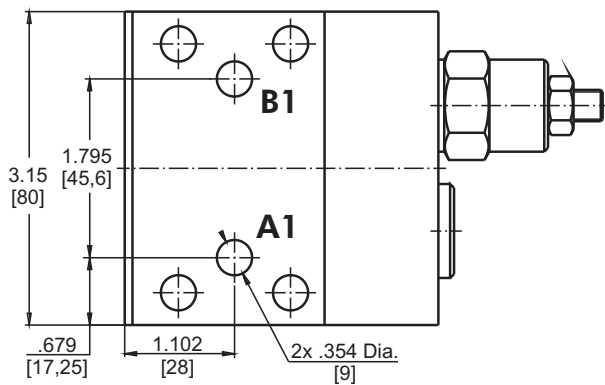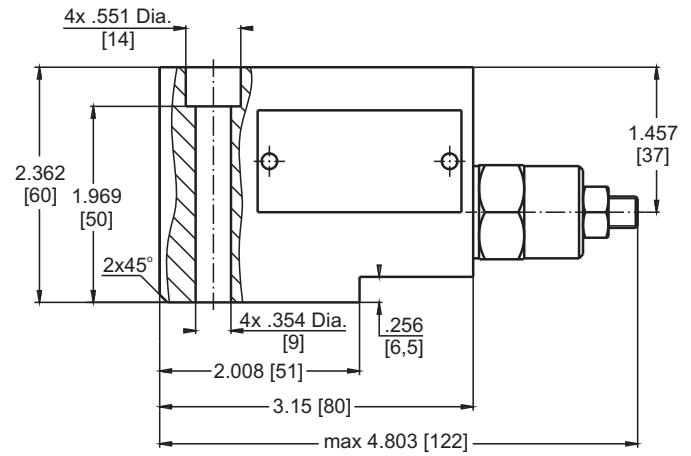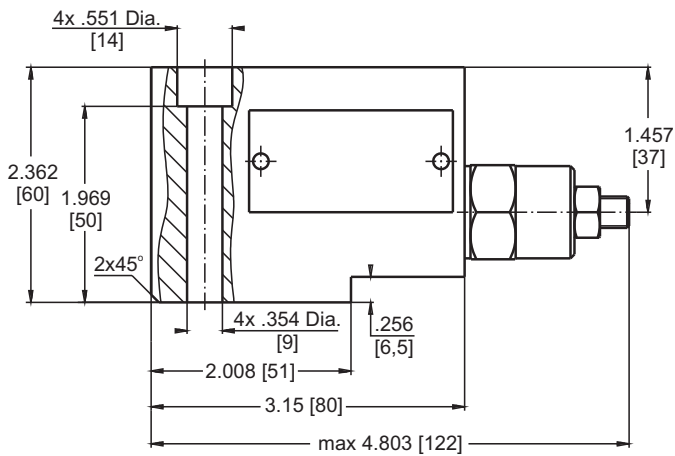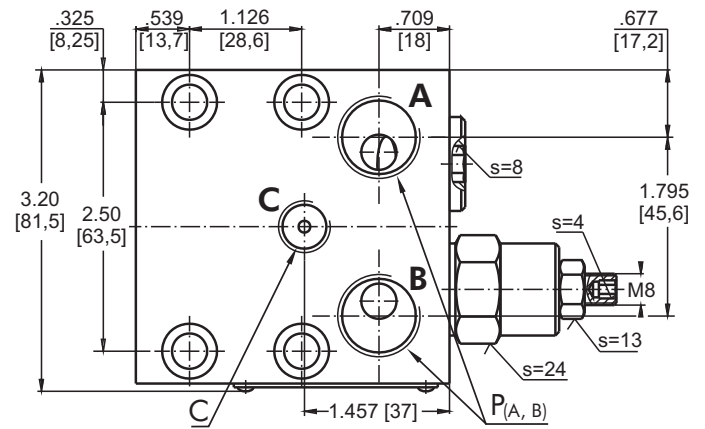


	Thread Ports - P _(A,B)	Thread Ports - C
A	7/8 - 14 UNF O-ring .67 [17] deep	7/16 - 20 UNF O-ring .50 [12,7] deep
-	G1/2 .67 [17] deep	G1/4 .55 [14] deep
M	M22x1,5 .67 [17] deep	M14x1,5 .55 [14] deep

Note : KPBHR Blocks are installed directly on HP and HR Motors with four bolts 5/16-18UNC, 2.5 long or M8x60 - 8.8 DIN 912. Tightening torque 177±221 lb-in [2,0^{+0,5} daNm].

VALVES FOR HP, HR HYDRAULIC MOTORS

DUAL VALVE KPBHR-250/1/D...

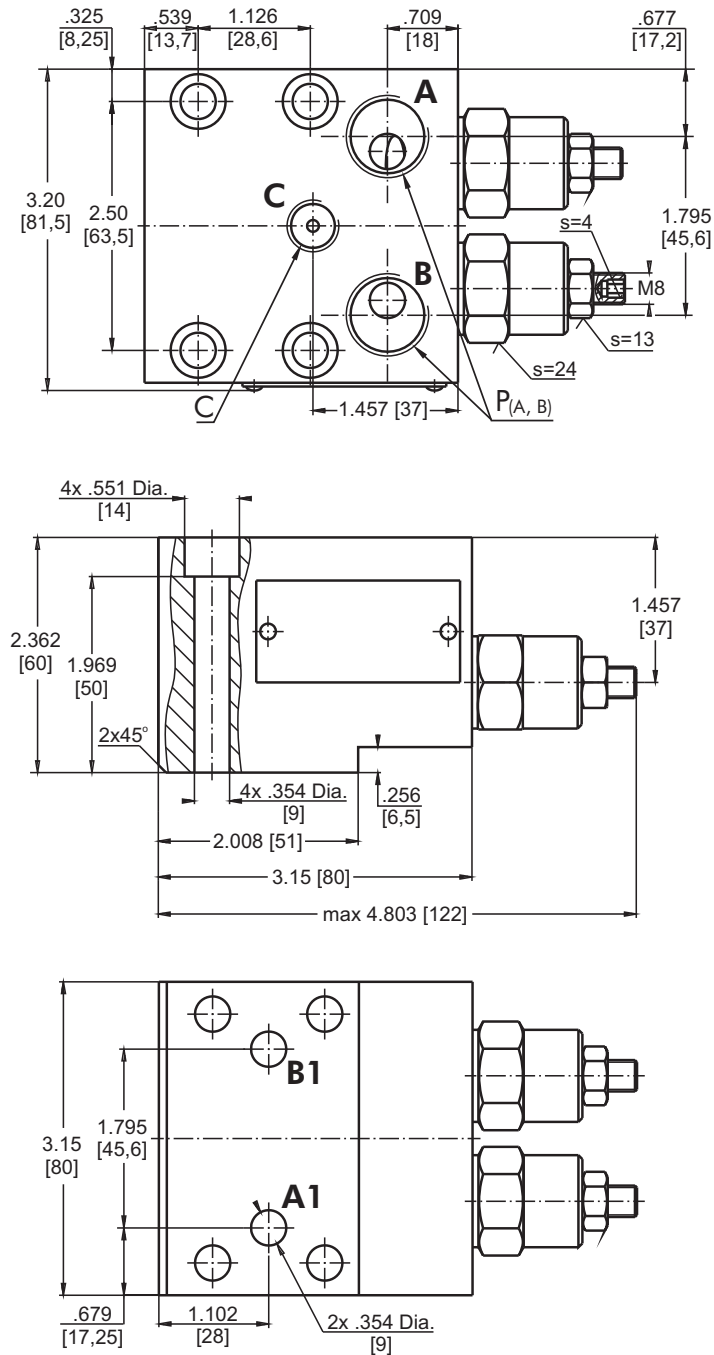

	Thread Ports - P _(A,B)	Thread Ports - C
A	7/8 - 14 UNF O-ring .67 [17] deep	7/16 - 20 UNF O-ring .50 [12,7] deep
-	G1/2 .67 [17] deep	G1/4 .55 [14] deep
M	M22x1,5 .67 [17] deep	M14x1,5 .55 [14] deep


Note : KPBHR Blocks are installed directly on HP and HR Motors with four bolts 5/16-18UNC, 2.5 long or M8x60 - 8.8 DIN 912. Tightening torque 177÷221 lb-in [2,0^{+0,5} daNm].

SWITCH VALVES

SPECIFICATION DATA







Parameters	Type	
	KPWR	KPWS
Flow Rate , GPM [lpm]	15.85	[60]
Rated Pressure , PSI [bar]	3625	[250]
Weight , lb	1.874	1.477
	[kg]	[0,850]
		1.477
		[0,670]



VALVE FOR MLHP, MLHR, MLHH HYDRAULIC MOTORS KPWR

VALVE FOR MLHS HYDRAULIC MOTORS KPWS

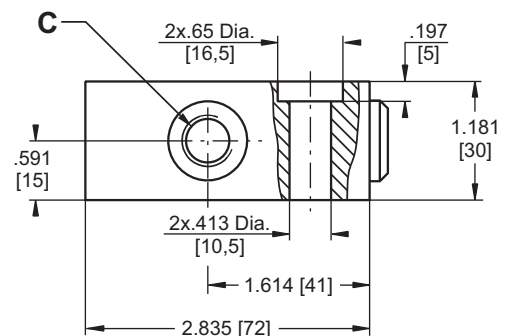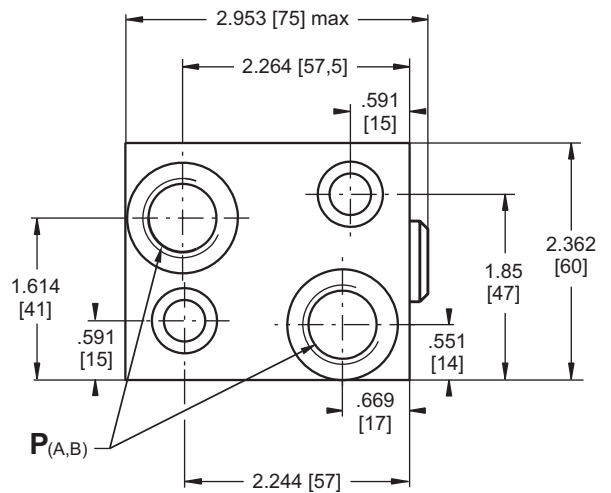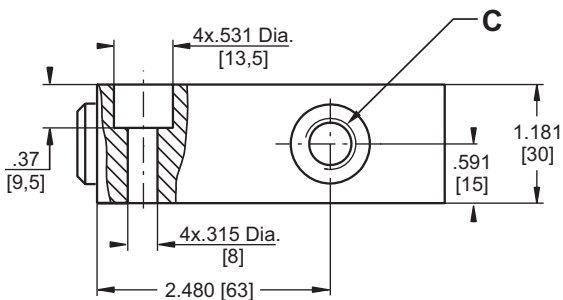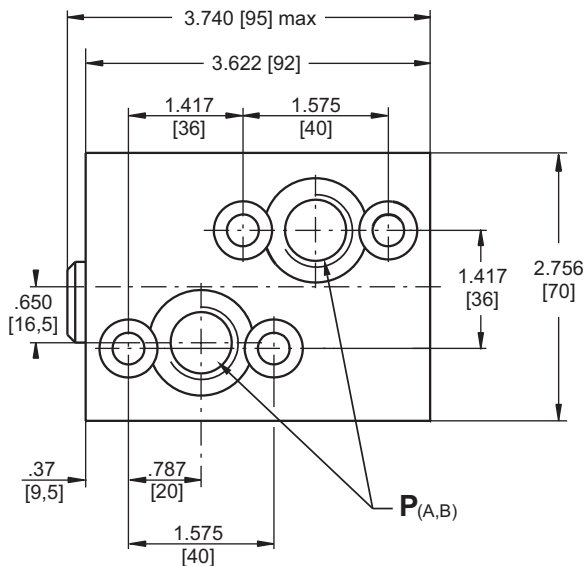


	Thread Ports - P _(A,B)	Thread Port - C
-	G1/2 .67 [17] depth	G1/4 .55 [14] depth
M	M22x1,5 .67 [17] depth	M14x1,5 .55 [14] depth
A	7/8 - 14 UNF O-ring .67 [17] depth	7/16 - 20 UNF O-ring .50 [12,7] depth


Note: KPWR Blocks are installed directly on MLHP, MLHR and MLHH Motors with four screws 5/16-18UNC, .049 [1.25] long ANSI B 18.3 or M8x30 - 8.8 DIN 912.
Tightening torque 177÷221 lb-in [2,0^{+0,5} daNm].

KPWS Blocks are installed directly on MLHS Motors with two screws /8-16UNC, .059 [1.5] long ANSI B 18.3 or M10x35 - 8.8 DIN 912.
Tightening torque 336÷310 lb-in [3,5^{+0,3} daNm].


CROSSOVER RELIEF VALVES



Single Crossover
Relief Valve
type KPE ...



Single Crossover
Relief Valve
type KPE ...



Dual Crossover
Relief Valve
type KPD ...


SPECIFICATION DATA

Parameters	Type			
	KPER	KPDR	KPES	KPDS
Flow Rate , GPM [lpm]	15.85 [60]			
Pressure Range* , PSI [bar]	435÷1450; [30 ÷ 100];	725÷3050; [50 ÷ 210];	1160÷4350 [80 ÷ 300]	
Weight , lb [kg]	3.42 [1,55]		3.31 [1,50]	

*Pressure Settings are at flow rate of 1.32 GPM [5 lpm]
and viscosity 150 SUS [32 mm²/s] (122° F [50 °C]).



Rated Pressure

- A → 1450 PSI [100 bar]
- B → 3050 PSI [210 bar]
- C → 3625 PSI [250 bar]

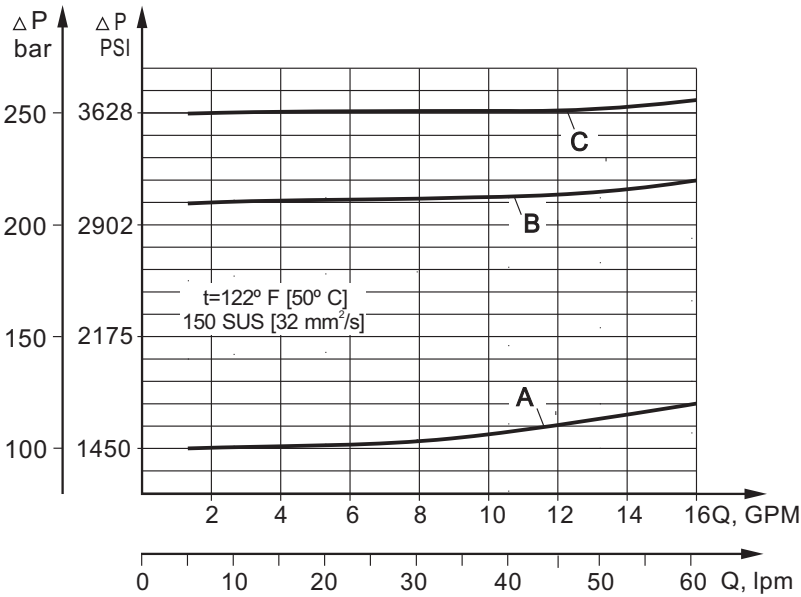


**VALVES FOR MLHP, MLHR, MLHH
HYDRAULIC MOTORS**

DUAL VALVE KPDR

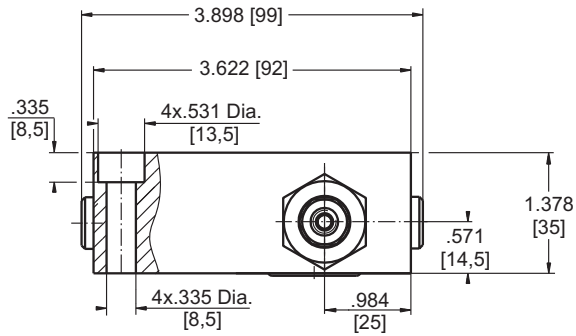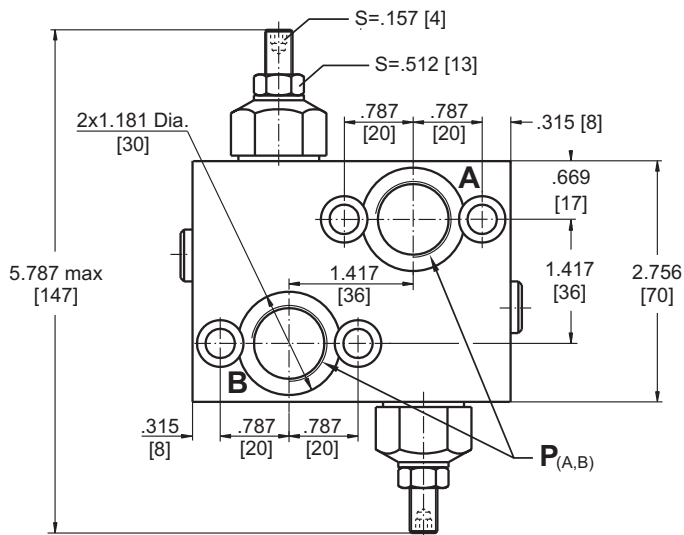



SINGLE VALVE KPER

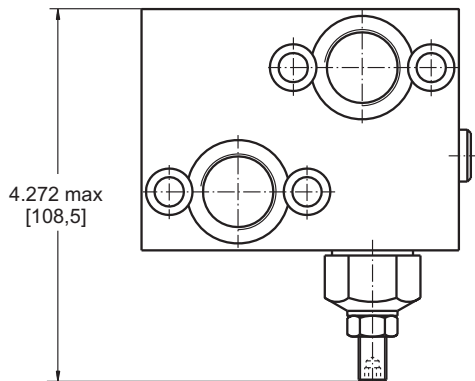


	Thread Ports - P _(A,B)
-	G1/2 .79 [20] depth
M	M22x1,5 .79 [20] depth
A	7/8 - 14 UNF O-ring .79 [20] depth

**VALVES FOR MLHS
HYDRAULIC MOTORS**

DUAL VALVE KPDS

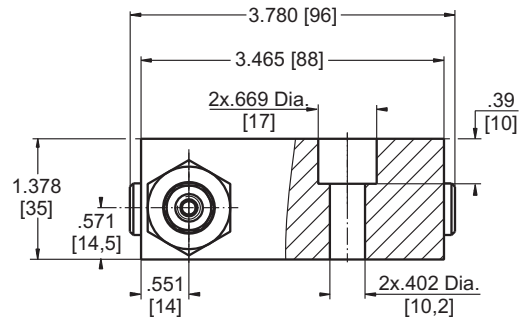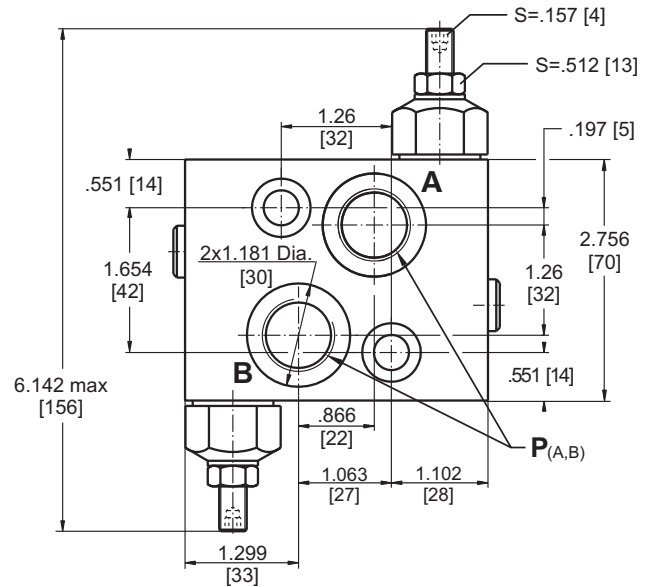


SINGLE VALVE KPES

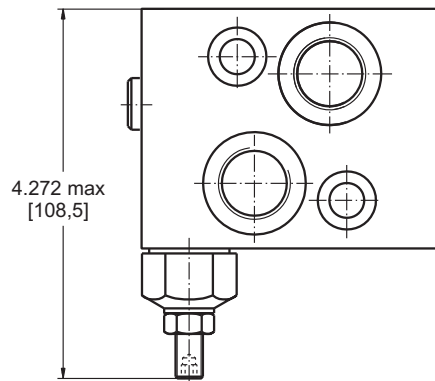


Note : **KPDR** and **KPER** Blocks are installed directly on MLHP, MLHR and MLHH Motors with four screws M8x35 - 8.8 DIN 912 or 5/16-18 UNC, 1.5 long ANSI B 18.3 . Tightening torque 177÷221 lb-in [2,0^{+0,5} daNm].
KPDS and **KPES** Blocks are installed directly on MLHS Motors with two screws M10x35 - 8.8 DIN 912 or 3/8-16 UNC, 1.5 long ANSI B 18.3 . Tightening torque 310 lb-in [3,5 daNm].


VALVES FOR MLHT HYDRAULIC MOTORS



Single Crossover
Relief Valve
type KPEAT ...



Single Crossover
Relief Valve
type KPEBT ...



Dual Crossover
Relief Valve
type KPDT ...


SPECIFICATION DATA

Parameters	Type	
	KPE...T	KPDT
Flow Rate , GPM [lpm]	32 [120]	
Pressure Range* , PSI	1160÷3050	
[bar]	[80÷210]	
Weight , lb	11.24	12.21
[kg]	[5,10]	[5,54]


*Pressure Settings are at flow rate of 1.32 GPM [5 lpm]
and viscosity 150 SUS [32 mm²/s] (122° F [50 °C]).

Rated Pressure


- A → 725 PSI [50 bar]
- B → 1450 PSI [100 bar]
- C → 2175 PSI [150 bar]
- D → 3045 PSI [210 bar]

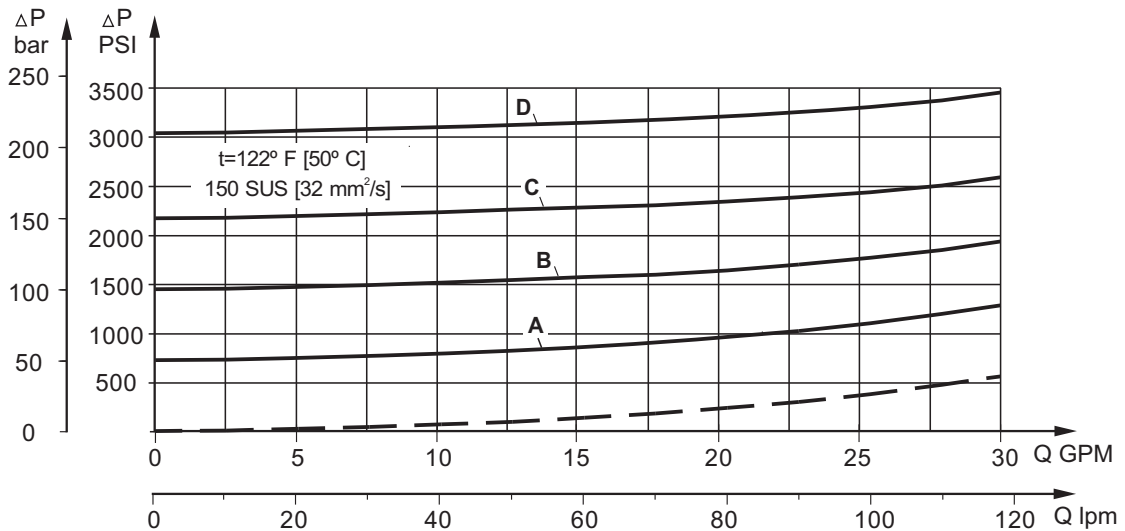


VALVES FOR MLHV HYDRAULIC MOTORS



Single Crossover
Relief Valve
type KPEAV ...



Single Crossover
Relief Valve
type KPEBV ...




Dual Crossover
Relief Valve
type KPDRV ...

SPECIFICATION DATA


Parameters	Type		
	KPEAV	KPEBV	KPDV
Flow Rate , GPM [lpm]	53 [200]		
Pressure Range* , PSI [bar]	145÷1450; 290÷3625 [10÷100]; [20÷250]		
Weight , lb [kg]	10.8 [4,90]	15.65 [7,10]	17.64 [8,00]

*Pressure Settings are at flow rate of 1.3 GPM [5 lpm] and viscosity 150 SUS [32 mm²/s] (122° F [50 °C]).

Rated Pressure

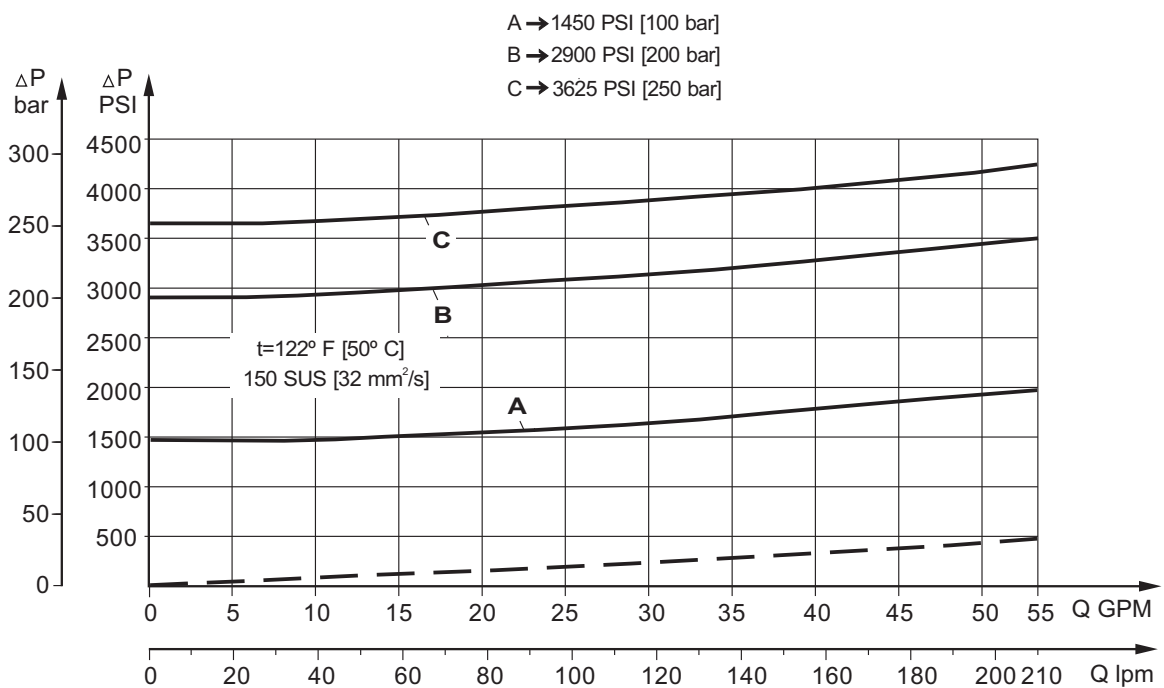


DUAL VALVE KPDV

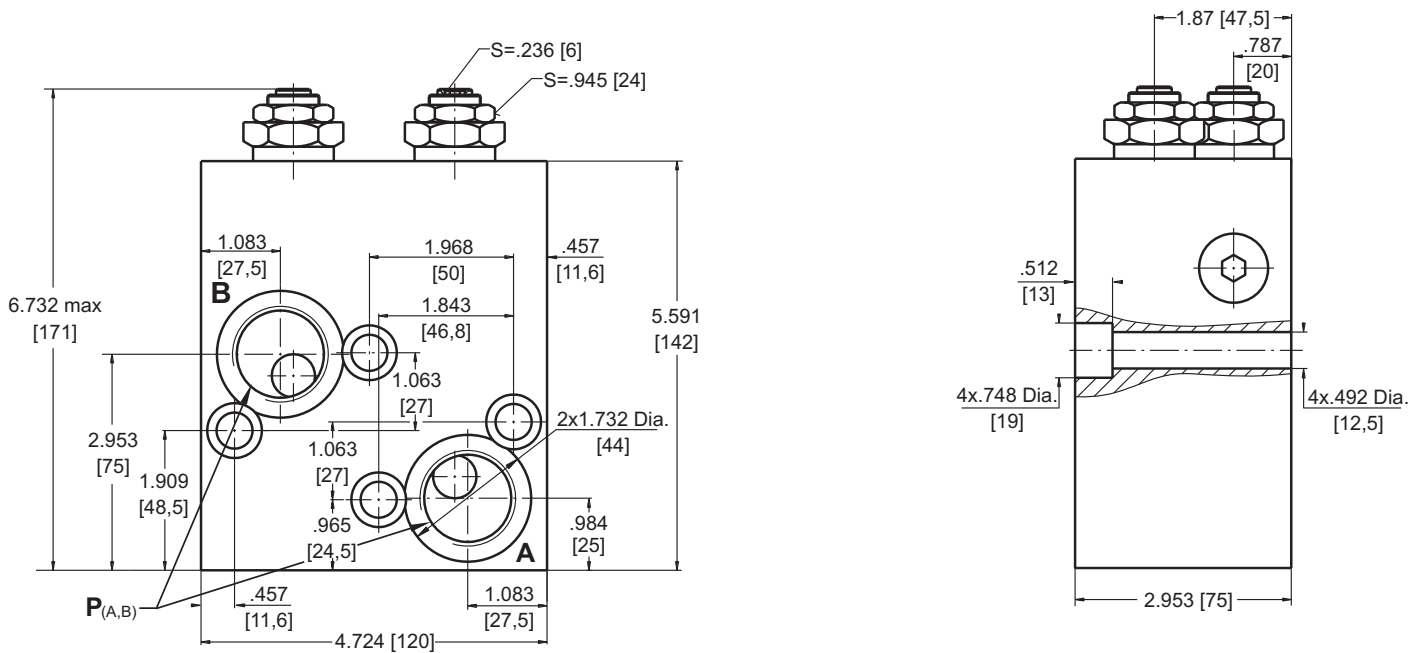

SINGLE VALVE KPEAV

SINGLE VALVE KPEBV

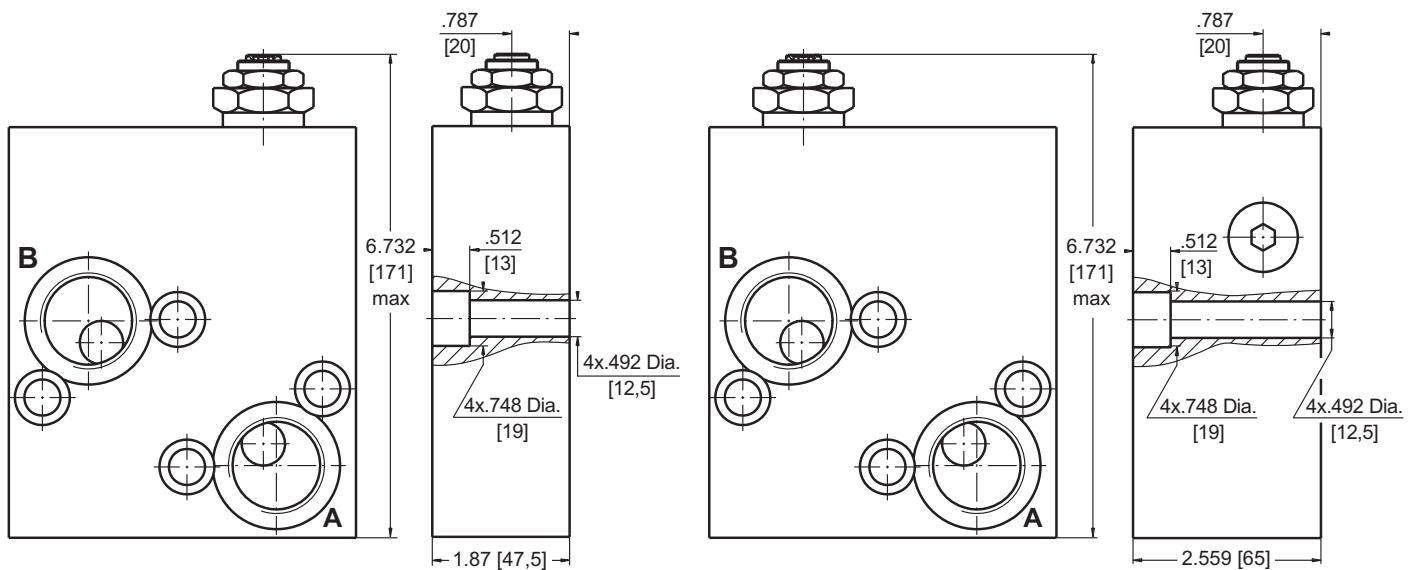

	Thread Ports - P _(A,B)
-	G1-A .79 [20] depth
M	M33x2 .79 [20] depth
A	1 5/16 -12 UN O-ring .79 [20] depth


Note : KPDV Blocks are installed directly on MLHV Motors with four screws M12x75 - 8.8 DIN 912.

KPEAV Blocks are installed directly on MLHV Motors with four screws M12x50 - 8.8 DIN 912.


KPEBV Blocks are installed directly on MLHV Motors with four screws M12x65 - 8.8 DIN 912.

Tightening torque 665 lb-in [7,5 daNm].


VALVES FOR MLHRW and HW HYDRAULIC MOTORS



Single Crossover
Relief Valve
type KPEAW ...



Single Crossover
Relief Valve
type KPEBW ...



Dual Crossover
Relief Valve
type KPDW ...


SPECIFICATION DATA

Parameters	Type	
	KPE...W	KPDW
Flow Rate , GPM [lpm]	15.85 [60]	
Pressure Range*, PSI	75÷580; 435÷1450; 1160÷3625	
[bar]	[5 ÷ 40]; [30 ÷ 100]; [80 ÷ 250]	
Weight , lb	3.97	6.39
[kg]	[1,80]	[2,90]

*Pressure Settings are at flow rate of 1.32 GPM [5 lpm]
and viscosity 150 SUS [32 mm²/s] (122° F [50°C]).



Rated Pressure

A → 1450 PSI [100 bar]
B → 3050 PSI [210 bar]
C → 3625 PSI [250 bar]

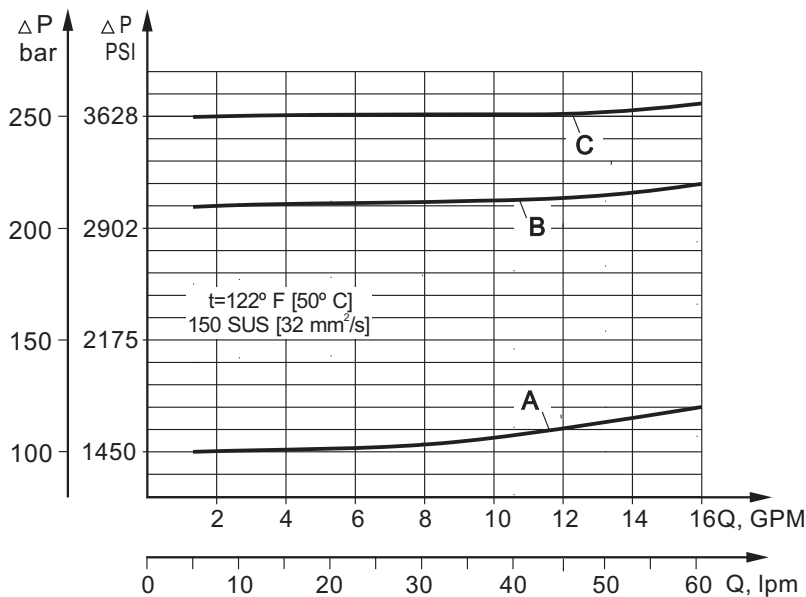


VALVES FOR MLHRW and HW HYDRAULIC MOTORS


DUAL VALVE KPDW...

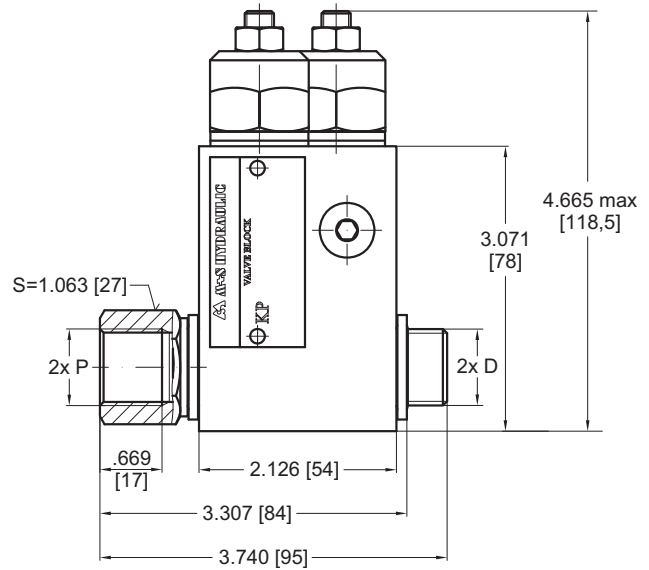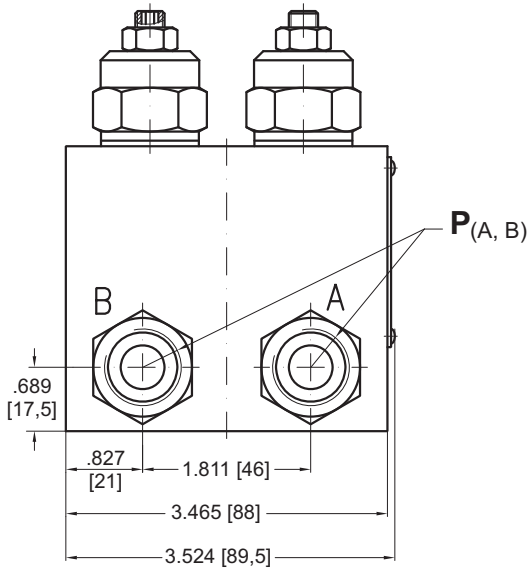


KPDW-...A

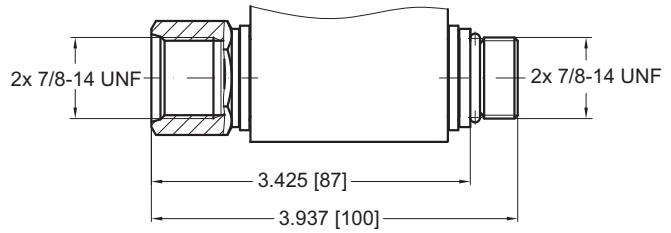

SINGLE VALVE KPEAW...

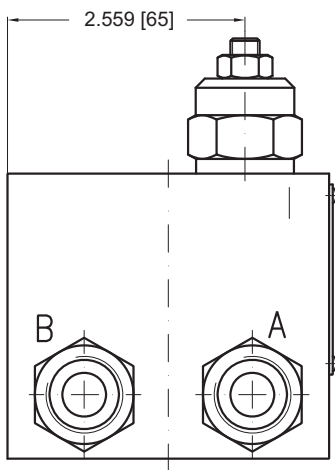

SINGLE VALVE KPEBW...

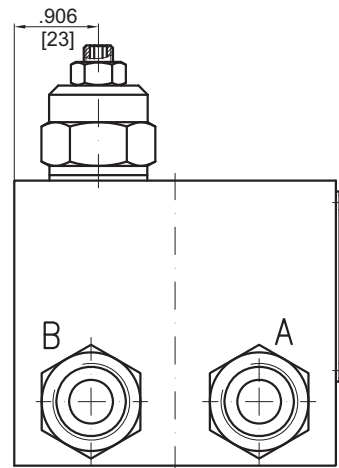


	Thread Ports - P (A,B)	Thread Ports - D
-	G1/2 .63 [16] depth	G1/2 .47 [12] length
M	M22x1,5 .63 [16] depth	M22x1,5 .47 [12] length
A	7/8 - 14 UNF O-ring .63 [16] depth	.47 [12] UNF O-ring .51 [13] length

Note : KPDW and KPE..W Blocks assembly to MLHRW or HW motors is done with two screws (thread **D**) included in the valve set. Tightening torque 710 lb-in [8 daNm].

CROSS PORT RELIEF VALVES

SPECIFICATION DATA




Dual Cross Port Relief Valves type KPDHR... and KPDRK...

Parameters	Type					
	KPDHR			KPDRK		
Flow Rate, GPM [lpm]	15.85 [60]					
Pressure PSI	70÷580	435÷1450	1160÷3625	145÷580	435÷1450	1160÷3625
Range*, [bar]	[5÷40]	[30÷100]	[80÷250]	[10÷40]	[30÷100]	[80÷250]
Weight, lb	5.34			3.53		
[kg]	[2,420]			[1,600]		

*Pressure Settings are at flow rate of 1.3 GPM [5 lpm] and viscosity 150 SUS [32 mm²/s] (122° F [50°C]).

VALVES FOR HP AND HR HYDRAULIC MOTORS


DUAL VALVE KPDHR

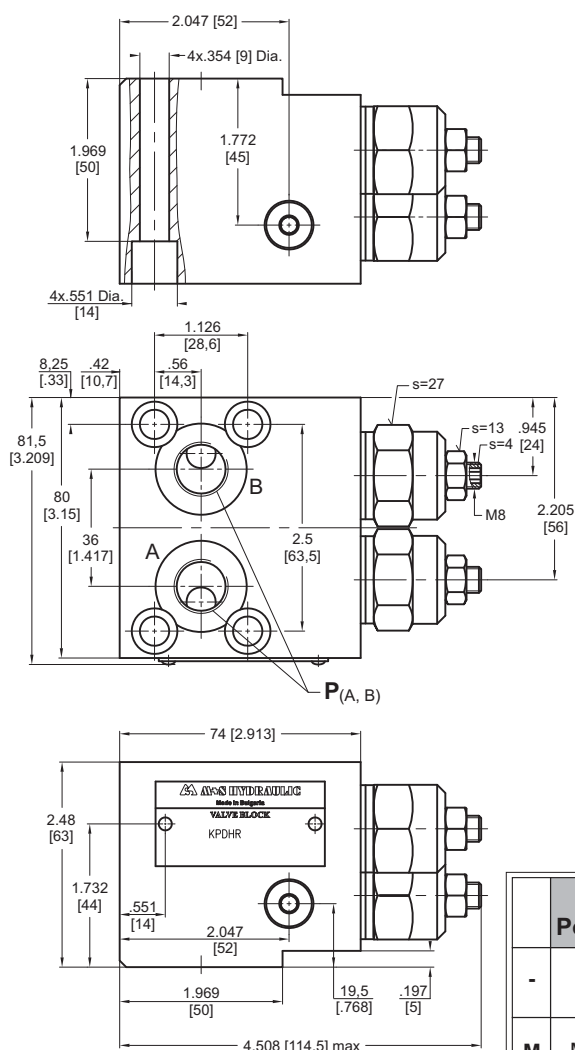

	Thread Ports - P_(A,B)
-	G3/8
M	M18x1,5
A	3/4-16 UNF O-ring

VALVES FOR RK HYDRAULIC MOTORS

DUAL VALVE KPDRK

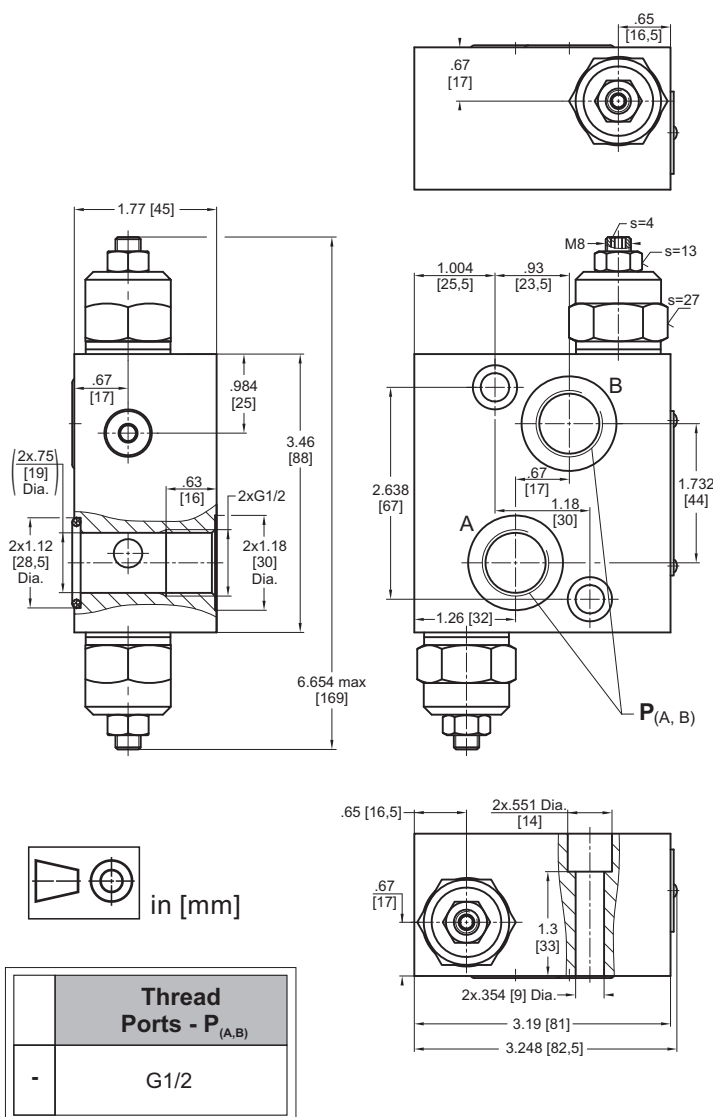

Note : KPDHR Blocks are installed directly on HP and HR Motors with four screws 5/16-18 UNC, 2.5 long ANSI B 18.3 or M8x60 - 8.8 DIN 912.

KPDRK Blocks are installed directly on RK Motors with two screws 5/16-18 UNC, 1.75 long ANSI B 18.3 or M8x45 - 8.8 DIN 912.

Tightening torque $2,0^{+0,5}$ daNm [177^{+45} lb-in].

ORDER CODE - OVERCENTER VALVES WITH BRAKE CONTROL

1	2	3	4	5	6	7
K P B		-		/		/

Pos.1 - Housing Type

- R** - Valve block for MP, MR and MH Motors
- S** - Valve block for MS Motors
- W** - Valve block for RW and HW Motors
- T** - Valve block for MT Motors
- V** - Valve block for MV Motors
- HR** - Valve block for HP and HR Motors

Pos.2 - Pressure Range, PSI [bar]

- 250** - 1015÷3625 [70÷250], Std Setting 250 bar@5 lpm

Pos.3 - Pilot Ratio

- 1** - 4,25:1

Pos.4 - Number of Valves

- D** - Two Valves - Dual
- E** - One Valve - Single (for R and S only)
- AE** - One Valve on line A - Single (for T, V and W only)
- BE** - One Valve on line B - Single (for T, V and W only)

Pos.5 - Threaded Ports

- omit - BSPP thread - ISO 228
- M** - Metric thread - ISO 262
- A** - Unified inch screw threads ANSI B 1.1 - 1982

Pos.6 - Option [Paint]**

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos.7 - Design Series

- omit - Factory specified

Notes: * Color at customer's request.

ORDER CODE - SWITCH VALVES

1	2	3	4
K P W			

Pos.1 - Housing Type

- R** - Valve block for MP, MR and MH Motors
- S** - Valve block for MS Motors
- T** - Valve block for MT Motors
- V** - Valve block for MV Motors

Pos.2 - Threaded Ports

- omit - BSPP thread - ISO 228
- M** - Metric thread - ISO 262
- A** - Unified inch screw threads ANSI B 1.1 - 1982

Pos.3 - Option [Paint]**

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos.4 - Design Series

- omit - Factory specified

Notes: * Color at customer's request.

ORDER CODE - CROSSOVER RELIEF VALVE

1	2	3	4	5	6
K P			/		

Pos.1 - Number of Valves

- D** - Two Valves - Dual
- E** - One Valve - Single (for R and S only)
- EA** - One Valve on line A - Single (for T, V and W only)
- EB** - One Valve on line B - Single (for T, V and W only)

Pos.2 - Housing Type

- R** - Valve block for MP, MR and MH Motors
- S** - Valve block for MS Motors
- W** - Valve block for RW and HW Motors
- T** - Valve block for MT Motors
- V** - Valve block for MV Motors

Pos.3 - Pressure Range, bar [PSI]

- 100*** - 30÷100 [435÷1450], Std Setting 100 bar@5 lpm
- 210*** - 50÷210 [725÷3050], Std Setting 210 bar@5 lpm
- 300*** - 80÷300 [1160÷4350], Std Setting 250 bar@5 lpm
- 210**** - 80÷210 [1160÷3050], Std Setting 210 bar@5 lpm
- 100***** - 10÷100 [145÷1450], Std Setting 100 bar@5 lpm
- 250***** - 20÷250 [290÷3625], Std Setting 250 bar@5 lpm

Pos.4 - Threaded Ports

- omit - BSPP thread - ISO 228
- M** - Metric thread - ISO 262
- A** - Unified inch screw threads ANSI B 1.1 - 1982

Pos.5 - Option [Paint]****

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos.6 - Design Series

- omit - Factory specified

Notes: * Useful for types R and S only.
 ** Useful for types T only.
 *** Useful for types V only.
 **** Color at customer's request.

The Valve Blocks are mangano phosphatized as standard.

ORDER CODE - CROSS PORT RELIEF VALVE

	1	2	3		4	5	6
K P				/			

Pos.1 - Number of Valves

D - Two Valves - Dual

Pos.2 - Housing Type

HR - Valve block for HR Motors

RK - Valve block for RK and GHL Motors

Pos.3 - Pressure Range, PSI [bar]

40 - 145÷ 580 [10÷ 40], Std Setting 100 bar@5 lpm

100 - 435÷1450 [30÷100], Std Setting 100 bar@5 lpm

250 - 1160÷3625 [80÷250], Std Setting 250 bar@5 lpm

Pos.4 - Threaded Ports

omit - BSPP thread - ISO 228

M - Metric thread - ISO 262

A - Unified inch screw threads ANSI B 1.1 - 1982

Pos.5 - Option [Paint]*

omit - no Paint

P - Painted

PC - Corrosion Protected Paint

Pos.6 - Design Series

omit - Factory specified

Notes: * Color at customer's request.

The Valve Blocks are mangano phosphatized as standard.

MOTOR-BRAKE ADDITIONAL OPTIONS

Additional Options Description	Order Code	Motor type			
		B/HR	RWB	SW	TW
Low Leakage	LL	O	O	-	-
Low Speed Valving	LSV	O	O	-	-
Free Running	FR	-	-		-
Reverse Rotation	R	O	O	-	-
Paint*	P	O	O	O	O
Corrosion Protected Paint*	PC	O	O	O	O
Special Paint**	PS	O	O	O	O
	PCS				
Check Valves		-	O	S	S

O	Optional
-	Not applicable
S	Standard

* Colour at customer's request.

** Non painted feeding surfaces, colour at customer's request.

APPLICATION CALCULATION

VEHICLE DRIVE CALCULATIONS

1. Motor speed: n , RPM

$$n = \frac{168 \times v_{mi} \times i}{R_m} \quad n = \frac{2,65 \times v_{km} \times i}{R_m}$$

v_{km} - vehicle speed, km/h;
 v_{mi} - vehicle speed, mile/h;
 R_m - wheel rolling radius, m;
 R_{in} - wheel rolling radius, in;
 i - gear ratio between motor and wheels.
 If no gearbox, use $i=1$.

2. Rolling resistance: RR , lbs [daN]

The resistance force resulted in wheels contact with different surfaces:

$$RR = G \times \rho$$

G - total weight loaded on vehicle, lbs [daN];
 ρ - rolling resistance coefficient (Table 1).

Table 1

Rolling resistance coefficient In case of rubber tire rolling on different surfaces	
Surface	ρ
Concrete- faultless	0.010
Concrete- good	0.015
Concrete- bad	0.020
Asphalt- faultless	0.012
Asphalt- good	0.017
Asphalt- bad	0.022
Macadam- faultless	0.015
Macadam- good	0.022
Macadam- bad	0.037
Snow- 5 cm	0.025
Snow- 10 cm	0.037
Polluted covering- smooth	0.025
Polluted covering- sandy	0.040
Mud	0.037÷0.150
Sand- Gravel	0.060÷0.150
Sand- loose	0.160÷0.300

3. Grade resistance: GR , lbs [daN]

$$GR = G \times (\sin \alpha + \rho \times \cos \alpha)$$

α - gradient negotiation angle (Table 2)

Table 2

Grade %	α Degrees	Grade %	α Degrees
1%	0° 35'	12%	6° 5'
2%	1° 9'	15%	8° 31'
5%	2° 51'	20%	11° 19'
6%	3° 26'	25%	14° 3'
8%	4° 35'	32%	18°
10%	5° 43'	60%	31°

4. Acceleration force: FA , lbs [daN]

Force FA necessary for acceleration from 0 to maximum speed v and time t can be calculated with a formula:

$$FA = \frac{v_{mi} \times G}{22 \times t}, [\text{lbs}]; \quad FA = \frac{v_{km} \times G}{36 \times t}, [\text{daN}]$$

FA - acceleration force, lbs [daN];
 t - time, [s].

5. Tractive effort: DP , lbs [daN]

Tractive effort DP is the additional force of trailer. This value will be established as follows:

-acc.to constructor's assessment;
 -as calculating forces in items 2, 3 and 4 of trailer; the calculated sum corresponds to the tractive effort requested.

6. Total tractive effort: TE , lbs [daN]

Total tractive effort TE is total effort necessary for vehicle motion; that the sum of forces calculated in items from 2 to 5 and increased with 10 % because of air resistance.

$$TE = 1,1 \times (RR + GR + FA + DP)$$

RR - force acquired to overcome the rolling resistance;
 GR - force acquired to slope upwards;
 FA - force acquired to accelerate (acceleration force);
 DP - additional tractive effort (trailer).

7. Motor Torque moment: M , lb-in [daNm]

Necessary torque moment for every hydraulic motor:

$$M = \frac{TE \times R_{in} [R_m]}{N \times i \times \eta_M}$$

N - motor numbers;
 η_M -mechanical gear efficiency (if it is available).

8. Cohesion between tire and road covering: M_w , lb-in [daNm]

$$M_w = \frac{G_w \times f \times R_{in} [R_m]}{i \times \eta_M}$$

To avoid wheel slipping, the following condition should be observed $M_w > M$

f - frictional factor;

G_w - total weight over the wheels, lbs [daN].

Table 3

Surface	Frictional factor f
Steel on steel	0.15 ÷ 0.20
Rubber tire on polluted surface	0.5 ÷ 0.7
Rubber tire on asphalt	0.8 ÷ 1.0
Rubber tire on concrete	0.8 ÷ 1.0
Rubber tire on grass	0.4


9.Radial motor loading: P_{rad} , lbs [daN]

When motor is used for vehicle motion with wheels mounted directly on motor shaft, the total radial loading of motor shaft P_{rad} is a sum of motion force and weight force acting on one wheel.

G_w - Weight held by wheel;

P_{rad} - Total radial loading of motor shaft;

M/R - Motion force.



$$P_{rad} = \sqrt{G_w^2 + \left(\frac{M}{R}\right)^2}$$

In accordance with calculated loadings the suitable motor from the catalogue is selected.

DRAINAGE SPACE AND DRAINAGE PRESSURE

Advantages in oil drainage from drain space: Cleaning; Cooling and Seal lifetime prolonging.

