



## Description:

The EDS 3400 is a compact electronic pressure switch with integrated digital display for relative pressure measurement in the high-pressure range. The instrument has a stainless steel measurement cell with thin-film strain gauge. The instrument can have one or two switching outputs and there is the option of an additional switchable analogue output signal (4 .. 20 mA or 0 .. 10 V).

A special design feature of the EDS 3400 is that the display can be moved in two planes. The device can be installed in almost any position and the display can be turned to the optimum position without the usual additional expense of a mechanical adapter. The 4-digit display can indicate the pressure in **bar**, **psi** or **MPa**.

The user can select the particular unit of measurement. When changing to a different measurement unit, the instrument automatically converts all the switching settings to the new unit of measurement. In addition, the EDS 3400 is also available in a DESINA®-compliant version. The main applications of the EDS 3400 are primarily in hydraulics and pneumatics, as well as in refrigeration and air conditioning technology.

## Special features:

- 1 or 2 PNP transistor switching outputs, up to 1.2 A load per output
- Accuracy  $\leq \pm 1\%$  FS
- Optional switchable analogue output (4 .. 20 mA / 0 .. 10 V)
- 4-digit digital display
- Optimum alignment - can be rotated in two planes (axes)
- Measured value can be displayed in bar, psi or MPa
- User-friendly due to key programming
- Switching points and switch-back hystereses can be adjusted independently
- Many useful additional functions
- Optional Desina®-compliant pin configuration with diagnostic function



# Electronic Pressure Switch EDS 3400

## Technical data:

Input data	
Measuring ranges	40; 100; 250; 400; 600 bar
Overload pressures	80; 200; 500; 800; 1000; bar
Burst pressures	200; 500; 1000; 2000; 2000 bar
Mechanical connection	G1/4 A DIN 3852 Threaded port DIN 3852-G1/4
Torque value	20 Nm
Parts in contact with medium	Mech. connection: Stainless steel Seal: FPM (G1/4 A DIN 3852)
Output data	
Accuracy to DIN 16086, Max. setting (display, analogue output)	$\leq \pm 0.5\%$ FS typ. $\leq \pm 1\%$ FS max.
Repeatability	$\leq \pm 0.25\%$ FS max.
Temperature drift	$\leq \pm 0.025\%$ FS / °C max. zero point $\leq \pm 0.025\%$ FS / °C max. range
Analogue output (optional)	
Signal	selectable: 4 .. 20 mA      load resistance max. 500 Ω 0 .. 10 V      load resistance min. 1 kΩ
Switch outputs	
Type	PNP transistor output
Switching current	max. 1.2 A
Switching cycles	> 100 million
Reaction time	< 10 ms
Long-term drift	$\leq \pm 0.3\%$ FS typ. / year
DESINA® diagnostic signal (Pin 2)	
Function	OK: HIGH level / not OK: LOW level
Level	HIGH: approx. +U <sub>B</sub> / LOW: < +0.3 V
Environmental conditions	
Compensated temperature range	-10 .. +70 °C
Operating temperature range	-25 .. +80 °C (-25 .. +60 °C acc. to UL spec.)
Storage temperature range	-40 .. +80 °C
Fluid temperature range	-25 .. +80 °C
CE mark	EN 61000-6-1 / 2 / 3 / 4
UL mark <sup>1)</sup>	Certificate No. E318391
Vibration resistance to DIN EN 60068-2-6 at 10 .. 500 Hz	$\leq 10$ g
Shock resistance to DIN EN 60068-2-29 (11 ms)	$\leq 50$ g
Protection class to IEC 60529	IP 67
Other data	
Supply voltage	9 .. 35 V DC without analogue output 18 .. 35 V DC with analogue output - limited energy - according to 9.3 UL 61010; Class 2; UL 1310/1585; LPS UL 60950
for use acc. to UL spec.	
Current consumption	max. 2.455 A total max. 35 mA with inactive switching outputs max. 55 mA with inactive switching outputs and analogue output
Display	4-digit, LED, 7 segment, red, height of digits 7 mm
Weight	~ 120 g

Note: Excess voltage, override protection and short circuit protection are provided.  
FS (Full Scale) = relative to the complete measurement range

<sup>1)</sup> Environmental conditions according to 1.4.2 UL 61010-1; C22.2 No 61010-1

## Setting options:

All settings available on the EDS 3400 are grouped in 2 easy-to-navigate menus. In order to prevent unauthorised adjustment of the device, a programming lock can be set.

## Setting ranges for the switch outputs:

Switching point function

Meas. range in bar	Switch point in bar	Hysteresis in bar	Increment* in bar
0 .. 40	0.6 .. 40	0.2 .. 39.6	0.1
0 .. 100	1.6 .. 100	0.6 .. 99.0	0.2
0 .. 250	4.0 .. 250	1.5 .. 247.5	0.5
0 .. 400	6.0 .. 400	2.0 .. 396	1
0 .. 600	9.0 .. 600	3.0 .. 594	1

Window function

Meas. range in bar	Lower switch value in bar	Upper switch value in bar	Increment* in bar
0 .. 40	0.6 .. 39.2	0.9 .. 39.6	0.1
0 .. 100	1.6 .. 98.2	2.4 .. 99	0.2
0 .. 250	4.0 .. 245.5	6.0 .. 247.5	0.5
0 .. 400	6.0 .. 392	9.0 .. 396	1
0 .. 600	9.0 .. 589	14 .. 594	1

\* All ranges given in the table are adjustable by the increments shown.

## Additional functions:

- Switching mode of the switching outputs adjustable (switching point function or window function)
- Switching direction of the switching outputs adjustable (N/C or N/O function)
- Switch-on and switch-off delay adjustable from 0.00 .. 99.99 seconds
- Choice of display (actual pressure, peak value, switch point 1, switch point 2, display off)
- Display filter for smoothing the display value during pressure pulsations
- Optional analogue output signal selectable 4 .. 20 mA or 0 .. 10 V
- Pressure can be displayed in the measurement units bar, psi, MPa. The scaling can also be adapted to indicate force, weight, etc.

## EDS 3400 for self diagnostics:



The DESINA®-compliant pressure switch has been specially developed for customers in the machine tool and mechanical engineering sectors and complies with the DESINA® specification. A diagnostic signal enables errors to be detected and an "ERROR" message also appears in the display. The electrical connection is a round 5-pole M12x1 to IP 67 in accordance with DESINA® requirements.

## Model code:

EDS 3 4 X X - X - XXXX - 000

### Mechanical connection

- 4 = G1/4 A DIN 3852 (male)
- 9 = Threaded port DIN 3852-G1/4

### Electrical connection

- 6 = Male M12x1, 4 pole  
only possible on output models "1", "2" and "3"
- 8 = Male M12x1, 5 pole  
only possible on output model "5"

### Output

- 1 = 1 switching output  
only in conjunction with electrical connection type "6"
- 2 = 2 switching outputs  
only in conjunction with electrical connection type "6"
- 3 = 1 switching output and 1 analogue output  
only in conjunction with electrical connection type "6"
- 5 = 2 switching outputs and 1 analogue output  
only in conjunction with electrical connection type "8"

### Pressure ranges in bar

0040; 0100; 0250; 0400; 0600

### Modification number

000 = Standard

## Model code:

DESINA®-compliant or  
can be connected to DESINA®:



EDS 3 4 X 8 - X - XXXX - D00

### Mechanical connection

- 4 = G1/4 A DIN 3852 (male)
- 9 = Threaded port DIN 3852-G1/4

### Electrical connection

- 8 = Male M12x1, 5 pole

### Output

- 1 = 1 switching output
- 3 = 1 switching output and 1 analogue output

### Pressure ranges in bar

0040; 0100; 0250; 0400; 0600

### Modification number

D00 = DESINA®-compliant pin configuration for self-diagnostics


### Note:

For instruments with a different modification number, please read the label or the technical amendment details supplied with the instrument.

### Accessories:


Appropriate accessories, such as electrical connectors, mechanical adapters, splash guards, clamps for wall-mounting etc can be found in the Accessories brochure.

## Dimensions:

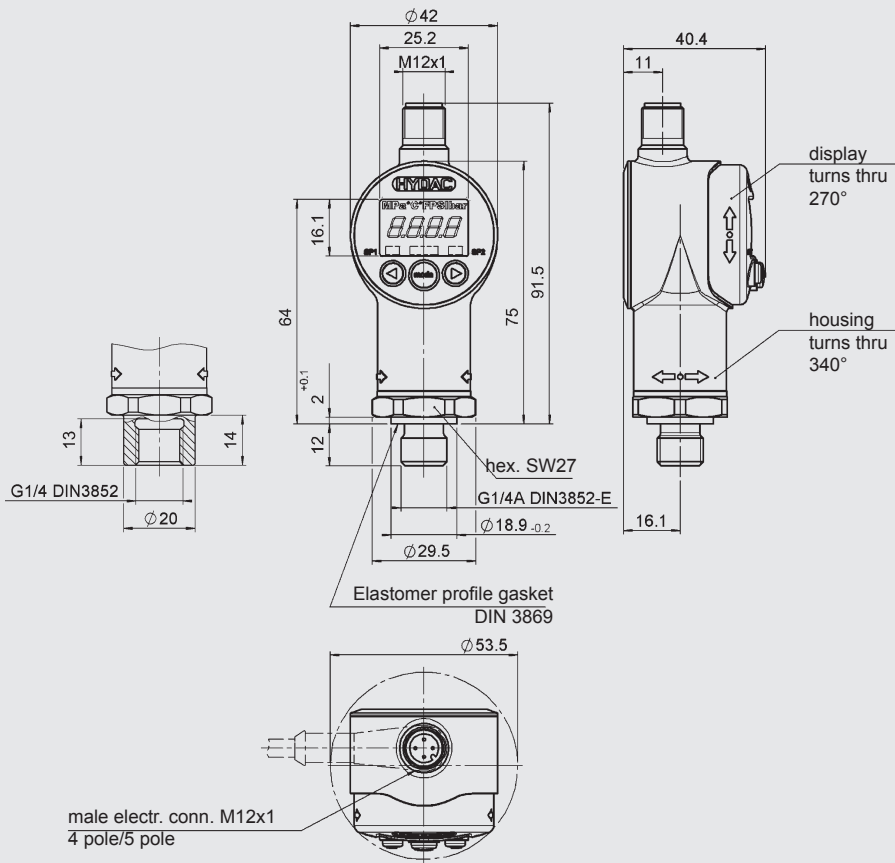


## Pin connections:

M12x1, 4 pole




Pin	EDS 34X6-1	EDS 34X6-2	EDS 34X6-3
1	+U <sub>B</sub>	+U <sub>B</sub>	+U <sub>B</sub>
2	n.c.	SP 2	Analogue
3	0 V	0 V	0 V
4	SP 1	SP 1	SP 1

M12x1, 5 pole



Pin	EDS 34X8-5
1	+U <sub>B</sub>
2	Analogue
3	0 V
4	SP 1
5	SP 2

M12x1, 5 pole



Pin	EDS 34X8-1	Can be connected to DESINA® EDS 34X8-3
1	+U <sub>B</sub>	+U <sub>B</sub>
2	Diagnostics	Diagnostics
3	0 V	0 V
4	SP 1	SP 1
5	n.c.	Analogue

## Note:

The information in this brochure relates to the operating conditions and applications described. For applications or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

**HYDAC ELECTRONIC GMBH**  
Hauptstraße 27, D-66128 Saarbrücken  
Telephone +49 (0)6897 509-01  
Fax +49 (0)6897 509-1726  
E-mail: [electronic@hydac.com](mailto:electronic@hydac.com)  
Internet: [www.hydac.com](http://www.hydac.com)

