



Barrel Transportation and Filtration Trolley

FT 5

Description

The barrel transportation and filtration trolley FT 5 is a mobile oil service unit. It fills/filters hydraulic and lubrication tanks. The unit is designed to carry a standard oil drum (200 l).

There is also the option to bypass the filter when emptying tanks (Version F).

Applications

- Hydraulic and lubrication oil systems in a variety of industries

Advantages

- Convenient offline filtration
- Easy, safe transport of a 200 l standard oil drum
- Easy to operate
- Filling to a defined cleanliness class
- Greater system availability
- Reduction in Life Cycle Cost LCC

Technical specifications

Max. flow rate	30/40 l/min
Operating pressure	4.5 bar max.
Viscosity range	15 ... 800 mm ² /s (version-dependent)
Permitted operating fluid	Mineral oil (others on request)
Permitted suction pressure at suction port	-0.4 bar to +0.6 bar
Fluid temperature	-10 ... 80 °C
Ambient temperature	-20 ... 40 °C
Seals	NBR (Option: FPM)
Protection class	IP 54
Power cable, length	6 m
Hoses, length	3 m
Hose connections	Suction hose NW 30 with lance Pressure hose NW 25 with lance
Weight	≈ 160 kg
Accessories	Pistol grip filling nozzle Flow meter

Model code

FT5 L 10 P 6 N 2 B 05 E

Type

FT5 = Barrel Transportation and Filtration Trolley

Versions

L = without change-over valve

F = with change-over valve

Type code

10 = Standard

Special models on request

Seals

P = NBR (Perbunan)

V = FPM (Viton)

Motor-pump unit

Code Approx. flow rate at 1450 rpm

3 30 l/min

6 40 l/min

Max. viscosity

250 mm²/s

800 mm²/s

Electric motor output at 50 Hz

0.75 kW

1.5 kW

Electric motor voltage

M = 1 x 230V - 50 Hz

N = 3 x 380 - 420 V - 50 Hz, 3 x 440 - 480 V - 60 Hz

S = 3 x 500 - 600 V - 50 (60)Hz

X = special voltage

Filter size

1 = Element 330

2 = Element 1300

Filter material

B = Betamicron (BN4HC)

A = Aquamicron (BN/AM), (AM)

Filtration rating

03 = 3 µm BN4HC; BN/AM

05 = 5 µm BN4HC

10 = 10 µm BN4HC; BN/AM

20 = 20 µm BN4HC;

40 = 40 µm AM

Clogging indicator

E = standard, pressure gauge


B = option: differential pressure gauge, visual

C = option: differential pressure gauge, electrical

D = option: differential pressure gauge, visual/electrical

B, C and D not for version "L"


Dimensions

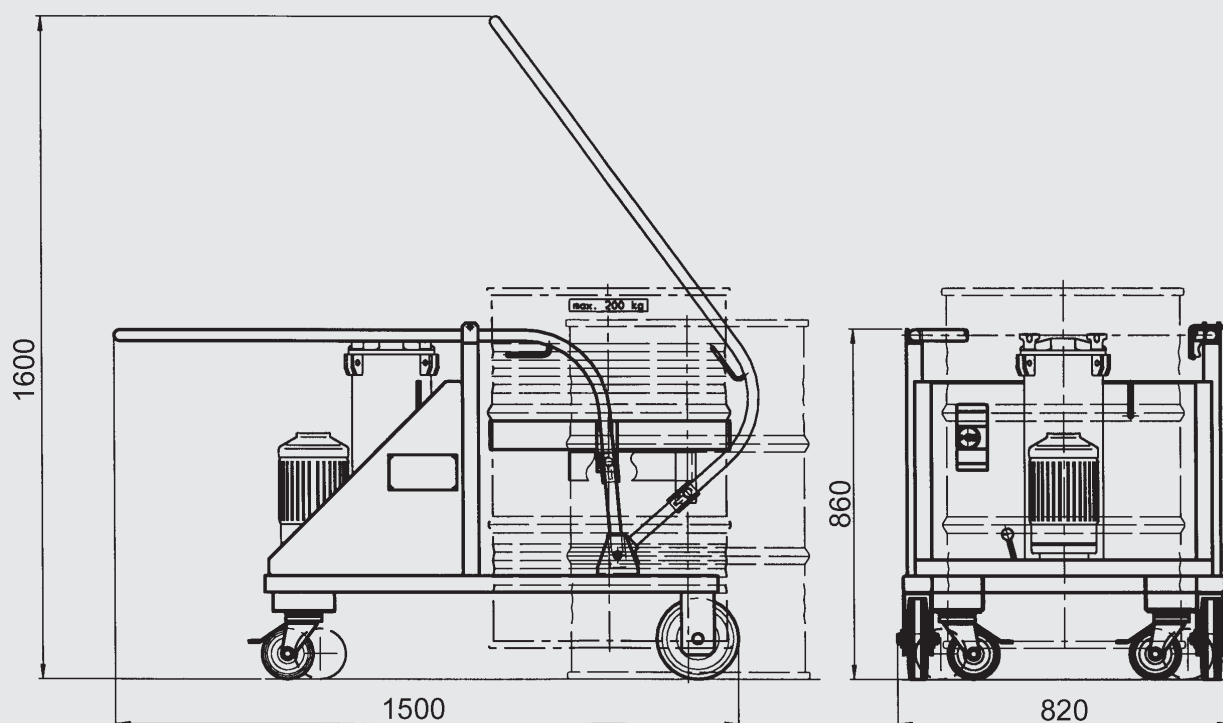


Hydraulic circuit diagram

Version F

Filtration

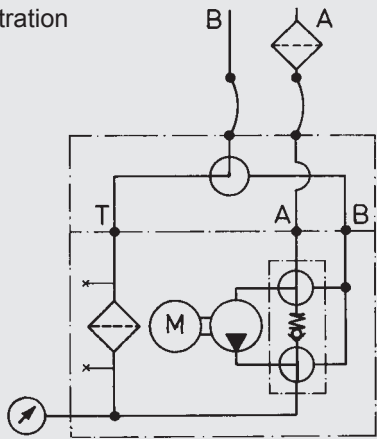


Emptying tank, filter B is bypassed

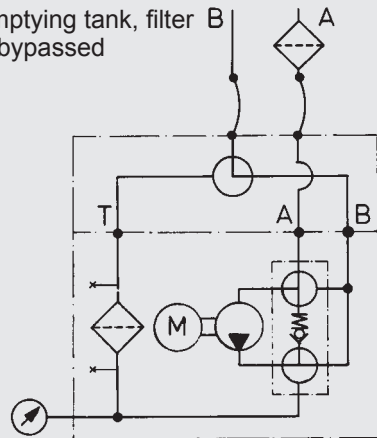

Version L

Filtration

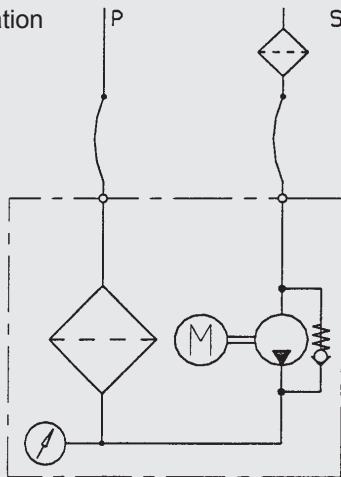

Replacement elements

Filter size	Filtration rating	Element type	Part No.
1	3 µm	0330 R 003 BN4HC/-KB (-V-KB)	1262999 (1263640)
1	5 µm	0330 R 005 BN4HC/-KB (-V-KB)	1263000 (1263641)
1	10 µm	0330 R 010 BN4HC/-KB (-V-KB)	1263001 (1263642)
1	20 µm	0330 R 020 BN4HC/-KB (-V-KB)	1263002 (1263643)
1	40 µm	0330 R 040 AM/-KB (-V-KB)	1272067 (1266563)
1	3 µm	0330 R 003 BN/AM/-KB (-V-KB)	1272069 (1276690)
1	10 µm	0330 R 010 BN/AM/-KB	1272068
2	3 µm	1300 R 003 BN4HC/-KB (-V-KB)	1263059 (1263760)
2	5 µm	1300 R 005 BN4HC/-KB (-V-KB)	1263060 (1263761)
2	10 µm	1300 R 010 BN4HC/-KB (-V-KB)	1263061 (1263762)
2	20 µm	1300 R 020 BN4HC/-KB (-V-KB)	1263062 (1263763)
2	40 µm	1300 R 040 AM/-KB	1267699
2	3 µm	1300 R 003 BN/AM/-KB	1267991
2	10 µm	1300 R 010 BN/AM/-KB (-V-KB)	1270010 (1276060)

V = Viton
KB = without bypass

Note

The information in this brochure relates to the operating conditions and applications described.

For applications and operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC FILTER SYSTEMS GMBH

Industriegebiet

D-66280 Sulzbach / Saar

Tel.: +49 (0) 6897/509-01

Fax: +49 (0) 6897/509-846

Internet: www.hydac.com

E-Mail: filtersystems@hydac.com