





**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228
Fax : +359/ 62 019
e-mail : info@hpt-bg.com
www.hpt-bg.com

CHECK VALVE

KO- ..

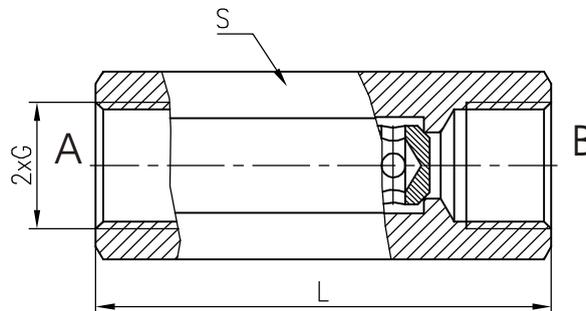

Type	Q _{max}	P _{max.}	Opening pressure of the check valve	L	S	2xG
	L/ min	bar		bar	mm	mm
KO-14	25	320	0,5	60	19	G1/ 4"
KO-38	25		0,5	60	24	G3/ 8"
KO-12	40		0,3	75	27	G1/ 2"

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
Temperature range: -20°C...+80°C
Filtration absolute: 63 µm

ORDERING CODE

KO-14

Type

Port threads G: **14,38,12**