

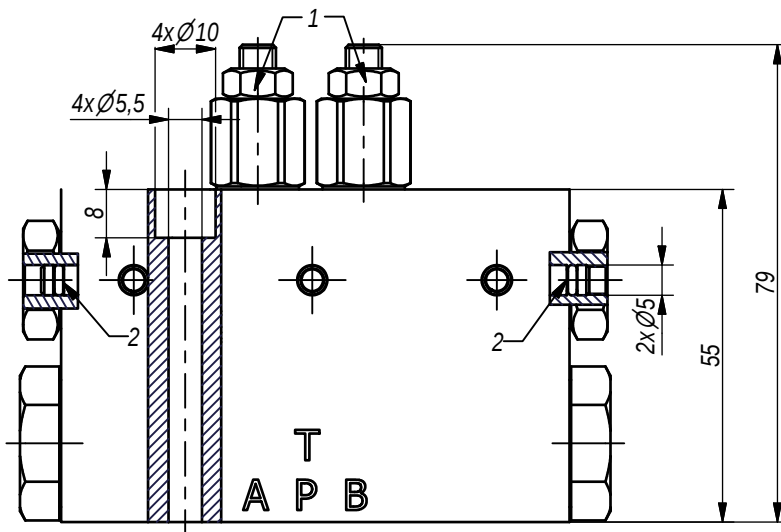
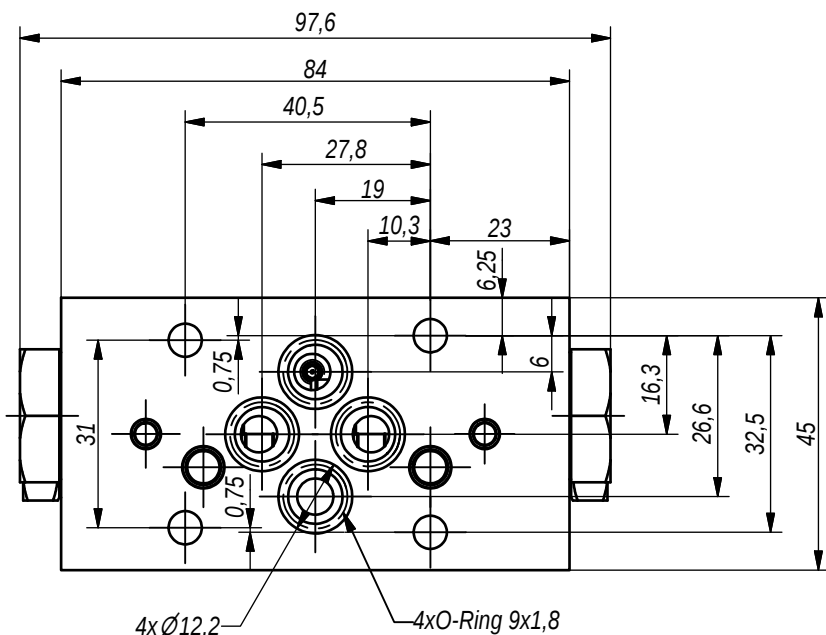




Note:

1. All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
2. Initial switching of directional control valve - by push pins position 2.
3. Mounting plate:
 - acc. to ISO 4401-AB-03-4A (CETOP3)
4. Tightening torque of connecting screws on the mounting plate - 8,5 N.m.

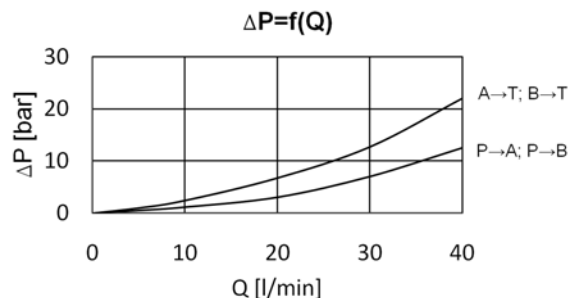

TECHNICAL DATA		
General		
Ambient temperature	°C	-20...+50
Hydraulic		
Working pressure P_w	bar	50...200
Pressure adjustment of relief valves position 1		$P_w + 10\%P_w$
Flow rate	L/min	3...40
Working fluid – mineral oil		
- viscosity	mm ² /s	10...100
- filtration level	μm	25 or better
- temperature	°C	-20...80

ORDERING CODE

4/2 RHA06 / 20

Type

Working pressure - code:
50...200 bar - 20