

Hydraulic Units UP40



Contents

	Page
1 Power pack housing	6
1.1 Technical information	6
1.2 Housing UP40 K1 (Uni-directional version)	7
1.3 Housing UP40 K4 (Uni-directional version)	9
1.4 Housing UP40 K5 Reversible	11
2 Gear pumps	12
2.1 Technical information	12
2.2 Gear pumps AP05/** S439 - Counterclockwise rotation In combination with K1 - K1G2 - K4 housings	13
2.3 Gear pumps APR05/** -S439 - Reversible In combination with K5 - K50G2 housings	13
3 Tanks	14
3.1 Technical information	14
4 Suction assembly. Standard version S439 Ø14 for vertical and horizontal positions	15
5 Electric motors	16
5.1 D.C. Electric motors	16
6 Drives	24
6.1 Couplings	24
7 Cartridge valves	25
7.1 Introduction	25
7.2 Pressure relief valves	27
7.3 Solenoid operated directional valves	28
7.4 Manual lowering valve	37
7.5 Manual override valves	39
7.6 Emergency hand pump: PM817/1.5	40
7.7 Solenoid valves	41
7.8 Other valves	42
7.9 Valve cavity plugs	42
7.10 Example of hydraulic power pack ordering code	43

General specifications

Experience acquired in designing mini power packs, and a research effort aimed constantly at satisfying the technical specifications of our customers: these assets have provided the principal resource for development of the UP40 power packs:


- compact dimensions achieved through detailed analysis of the geometries involved, and the components used;
- economy of the manufactured product, gained by adopting innovative technologies and by standardizing valve cavities with those of the major hydraulic components manufacturers;
- the assurance of constant quality, thanks to comprehensive control on materials and production cycles.

Power packs are widely used in mobile applications.

The UP40 is suitable for applications where short operations and middle-high pressure are required.

Invalid Lift Equipment is a good example, where the compactness of the unit is a particular advantage in view of the limited space available.

The need for fluid power in mobile machines means that power packs can be exploited in the widest variety of applications: lift platforms, and equipment for handling high and bulky loads in general.

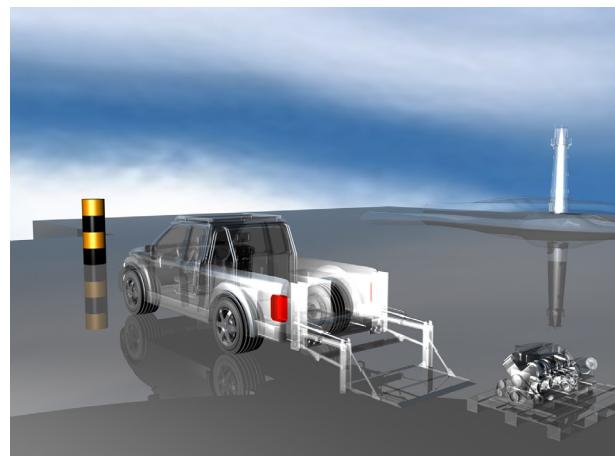



WARNING!

Bucher Hydraulics is not responsible for misuse or misapplication of product. Pressure values, type and number of cycles have to be considered before choosing the type of product. For any question about applications, please contact Bucher Hydraulics.

All the installation and maintenance operations of partially completed machinery must be made by technically competent personnel.

The hydraulic power units due to its construction does not perform the function of the safety component. So the user must insert safety components into the machine to protect against the possibility of breakage during operation.

The hydraulic power units can not function independently and are designed to be integrated into hydraulic systems.

Fluids should be contained and disposed of properly.

Prior to performing any maintenance make sure the equipment is turned off and that any stored energy, for example pressure, is released. Also, extended equipment or cylinders should be lowered and mechanically locked as required.

During the handling of the hydraulics power units, do not lift the unit by the valves mounted on it (see the figure 1, the arrows indicate the points to lift). Always wear appropriate safety gloves and footwear. Wait if the motor is hot.

Always wear eyes protection and protective clothing when working on and around hydraulic systems.


Remove jewellery and objects that might conduct electricity while working on power units.

Hydraulic fluid does pose a fire hazard, can cause burning or skin irritation if not properly handled.

Fluid under pressure can pierce the skin and enter the bloodstream causing death or serious injury.

Devices being operated by the hydraulic system should be immobilized so they cannot move and cause injury while being inspected or repaired. Disconnect from electrical source.

Further information are available in the dedicated documentation according to the Machinery Directive 2006/42/EC

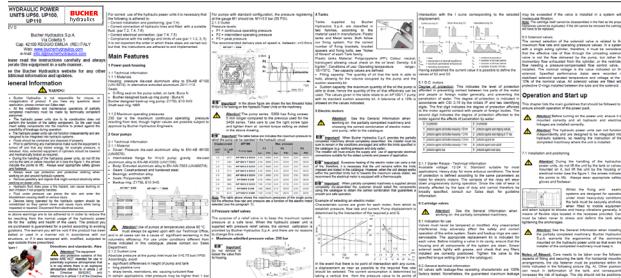


The above warnings are to be adhered to in order to reduce the risks resulting from the normal usage of the hydraulic power units for the safety and health of the users.

The product you have purchased is guaranteed for a period according to existing regulations.

The warrant will be void if the product has been installed or used in a manner not in accordance with our instructions, or if it was tampered with, modified, subjected to usage outside those prescribed.

Fig. 1

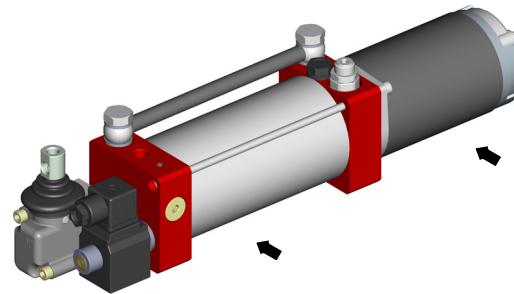

Directives and standards

- PED (97/23/EC)


The pressure relief valve assembled into the power pack can not to be considered and/or confused with the safety valve when the PED Directive is applied to the hydraulic system.

- Atex:


The equipment and protective systems of these catalogue ARE NOT intended for use in potentially explosive atmospheres that is to say where there is an explosive atmosphere. Ref: Directive 99/92/EC and Directive 2014/34/UE.

- ISO 9001:2008 / ISO 14001:2004

Bucher Hydraulics S.p.A. is certified for research, development and production of directional control valves, power units, gear pumps and motors, electro pumps, cartridge valves and integrated operating blocks for hydraulic applications.

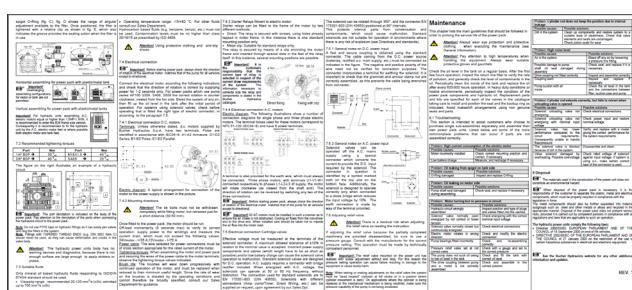

Sub-assembly index

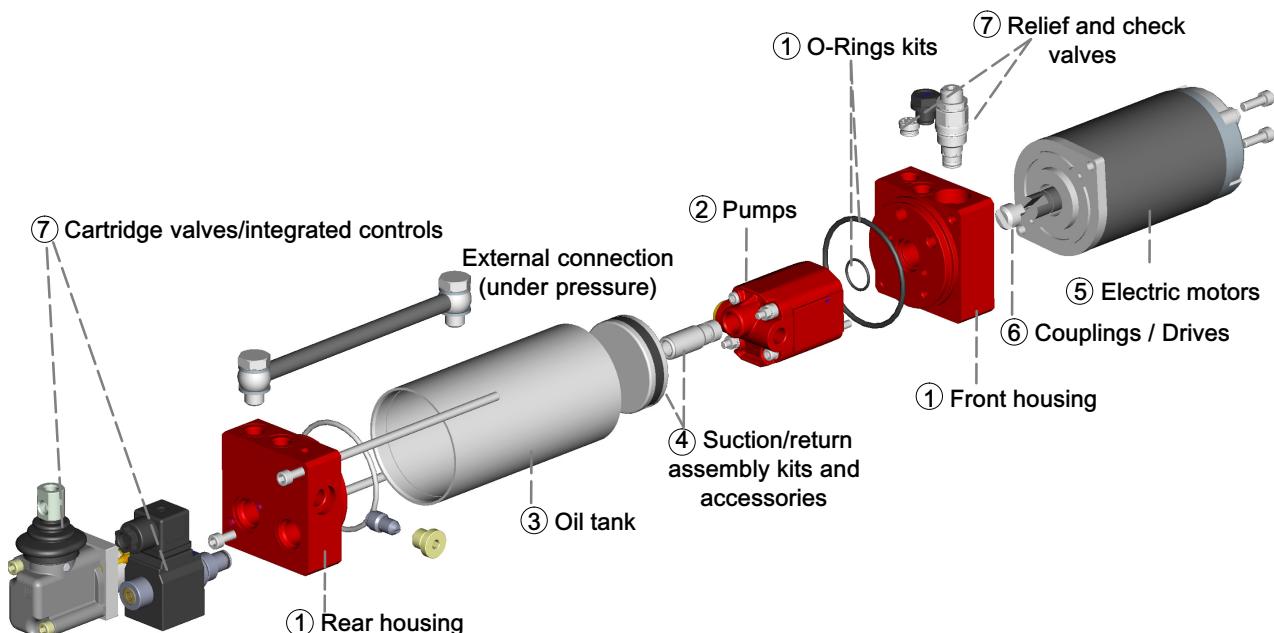

Sub-assemblies making up UP40 power pack

This page serves both as a guide to the contents of the catalogue and as an order form.

Simply fill in the individual sections with the designation codes for the options selected, and send direct to the Bucher Hydraulics S.p.A. Sales Centres.

1	Type of housing									
2	Pump					Series				
3	Tank	Fitting	Pos.							
4	Suction assembly kit									
5	Electric motor	Pos.	Relay	Pos.						
6	Drive									
7	Cavity b					Cavity c				
	Cavity d				-	-				
	Cavity e						Hand lever	Lever stick	Volt	

Customer									
Qty. - sample									
Qty. - batch									

Leave blank when ordering complete power packs.

1 Power pack housing

1.1 Technical information

1.1.1 Materials

Housing: aluminium bar.

Seals: Buna N

1.1.2 Maximum operating pressures

210 bar is the maximum intermittent operating pressure resulting from test, though higher values are possible subject to approval by Bucher Hydraulics Engineers Dpt.

1.1.3 Pumps

The body versions are intended for use with:

Single pump AP05 S.439 CCW rotation.

Single pump APR05 439 reversible rotation

1.1.4 Valves cavities


Standard cavities will allow 3/4-16 UNF cartridge valves manufactured by Bucher Hydraulics S.p.A., which are interchangeable with similar components made by major European and US manufacturers.

The only exception are the check valve, the flow regulator and pilot check valve that are realised according Bucher Hydraulics standard.


A variety of hydraulic circuits can be obtained with the same housing. To facilitate the correct composition of the desired

hydraulic circuit, the position of each cavity is identified by a letter. The combination letter/cavity position remain unchanged for all the various UP40 housings.

1.1.5 Non-standard symbols used in the text






1.1.6 Recommended tightening torques

Port Nm 

Standard: 1/4" BSP 30 ⁺⁷ ₋₅

Note: other threads on demand




Dimensions example: UP40K1 0.5 l tank capacity

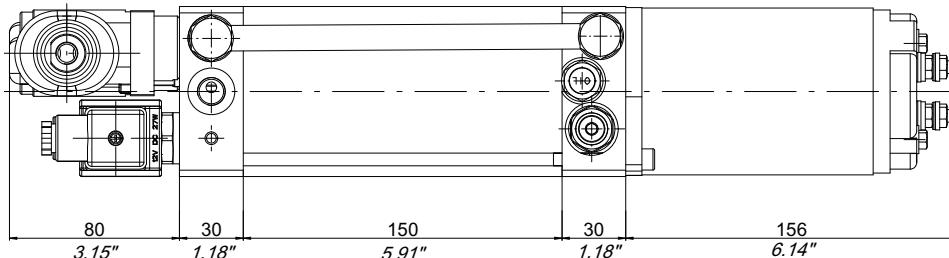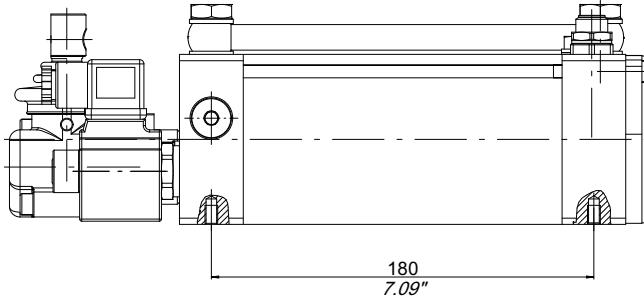

1.2 Housing UP40 K1 (Uni-directional version)




FRONT HOUSING K1

P out = 1/4" BSP
Cavity b = relief valve cavity

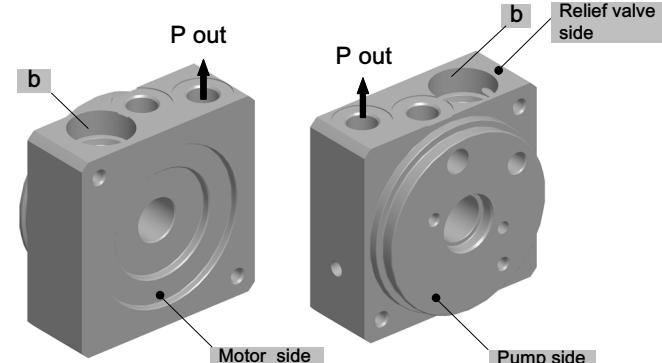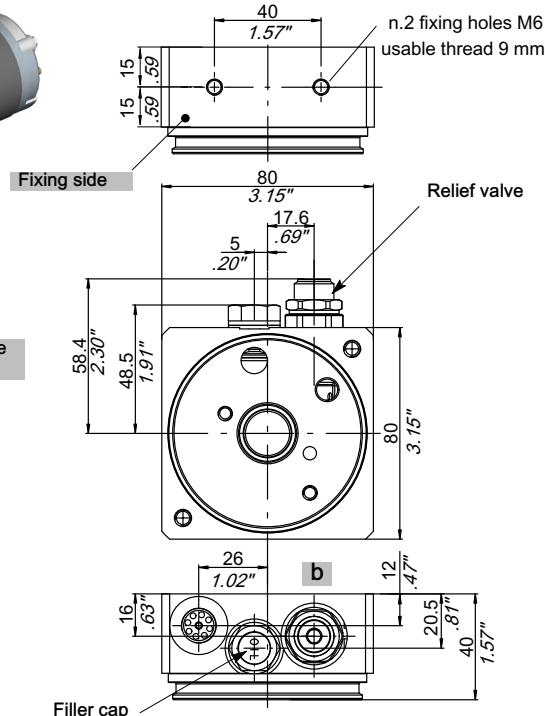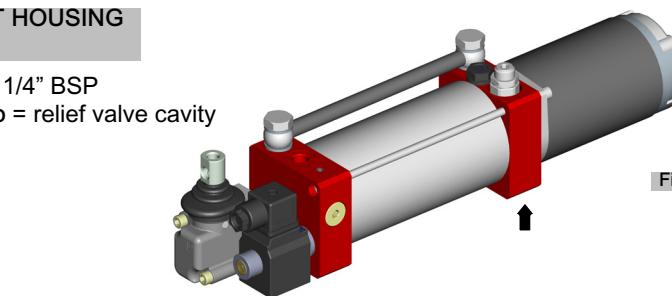

REAR HOUSING K1G2





P in = 1/4" BSP
A out = 1/4" BSP
Cavity c = 3/4"-16 UNF
Cavity d = 3/4"-16 UNF
Cavity e = 1/4" BSP

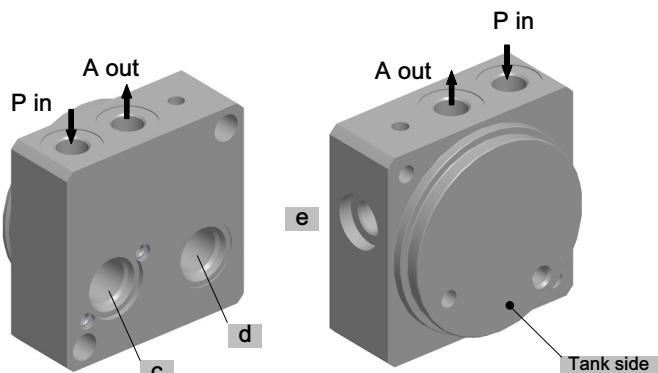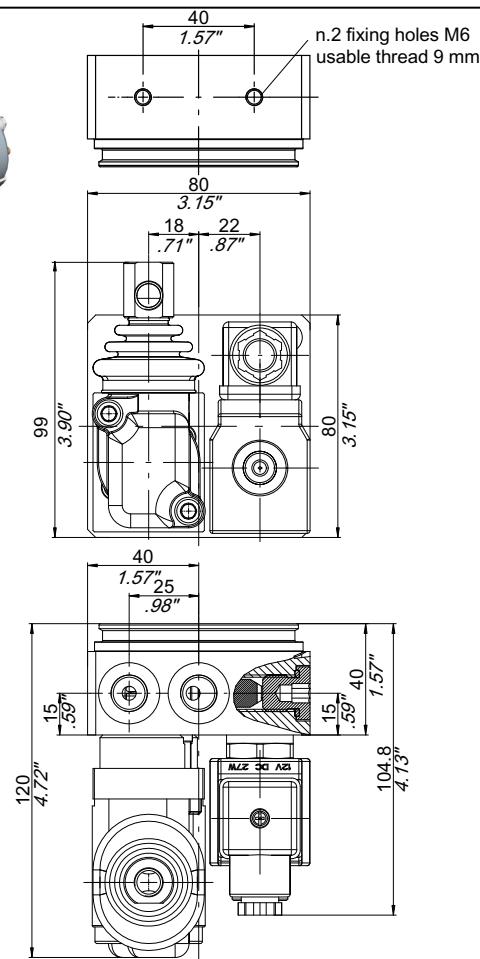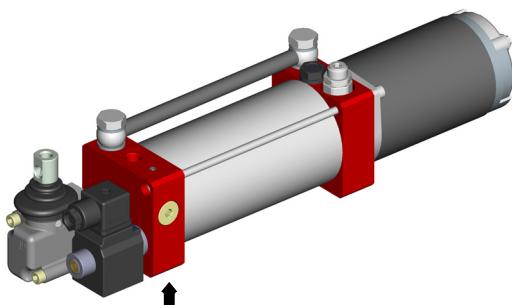




Type	Ports
UP40K1 - K1G2	1/4" BSP

Type of housing
1 U P 4 0 K 1 + K 1 G 2





FRONT HOUSING K1 interface

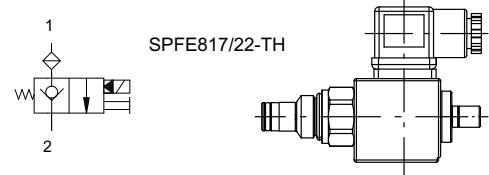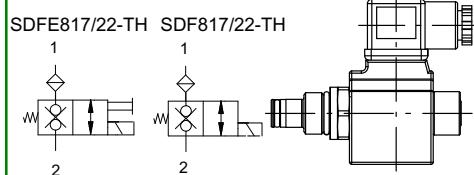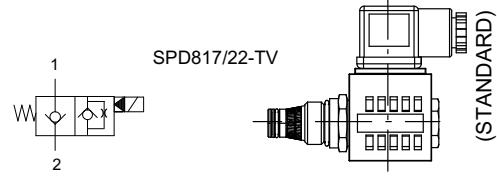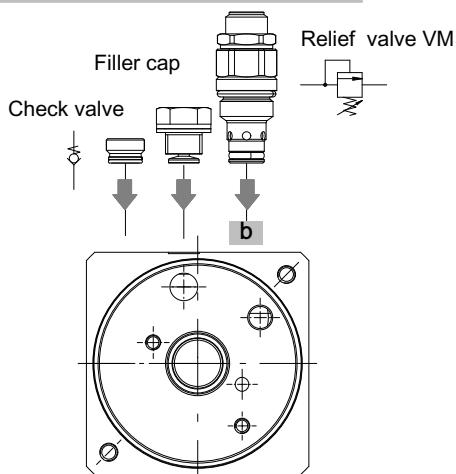

REAR HOUSING K1G2 interface for complete valves circuits

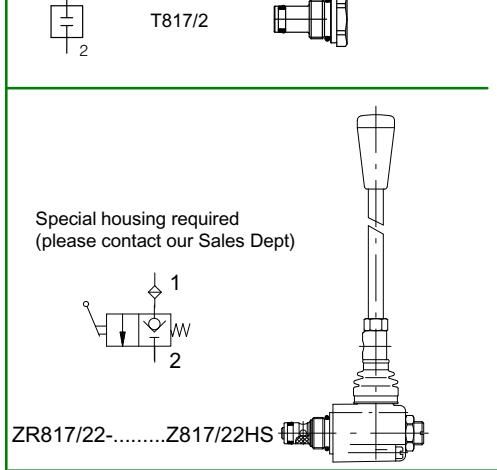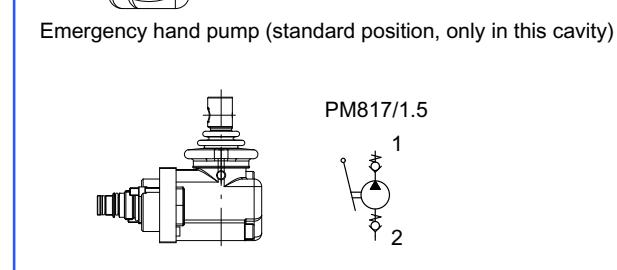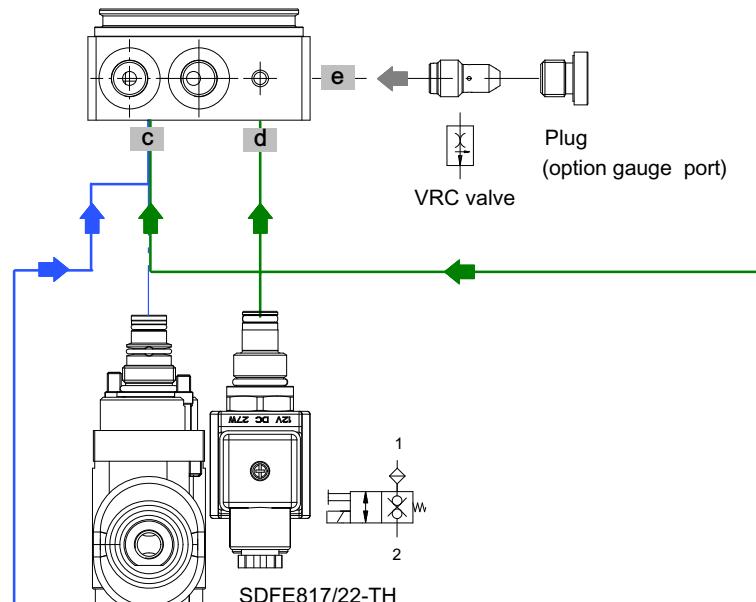

Realizable schemes






For the availability of new or dedicated hydraulic schemes, please contact our Sales Department.

1.3 Housing UP40 K4 (Uni-directional version)




FRONT HOUSING
K1

P out = 1/4" BSP
Cavity b = relief valve cavity

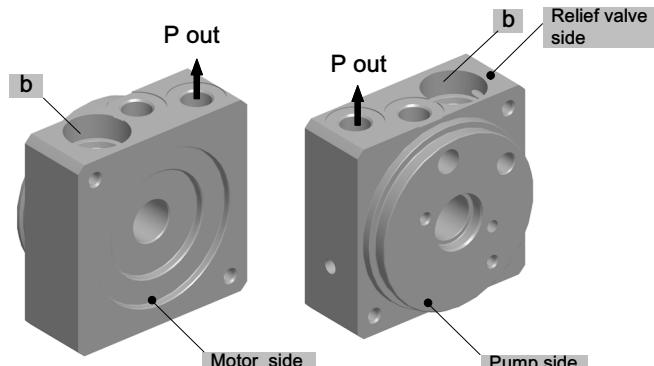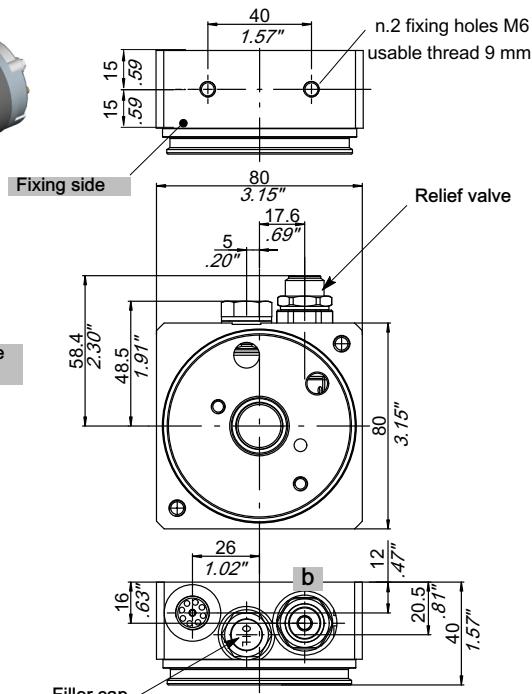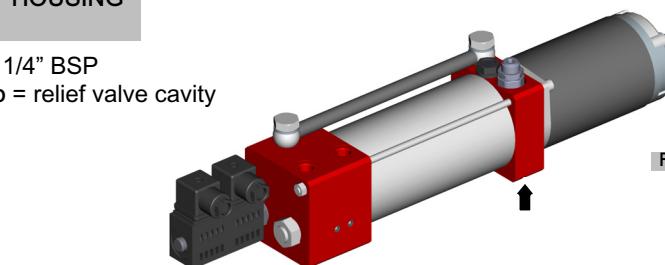

REAR HOUSING
K4G2


P in = 1/4" BSP
A out = 1/4" BSP
Cavity c = 3/4"-16 UNF 4 ways cavity (solenoid valve)
Cavity d = 3/4"-16 UNF 4 ways cavity (check valve)

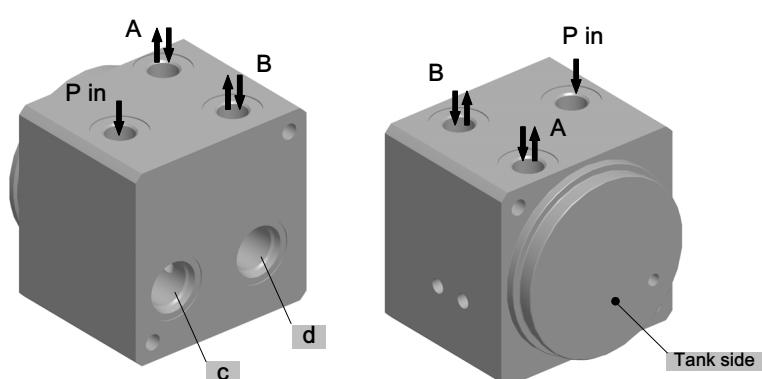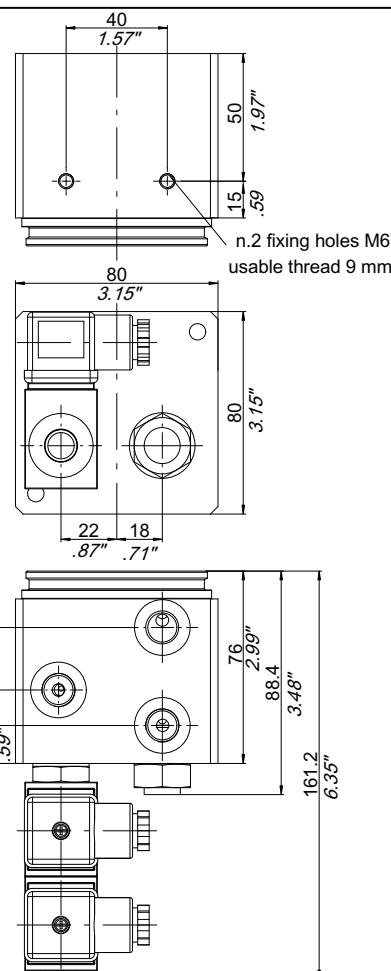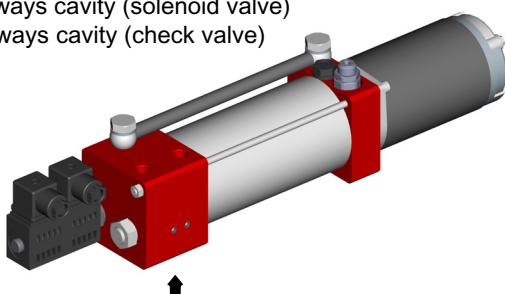


Type	Ports
UP40K1 - K4G2	1/4" BSP

Type of housing: 1 U P 4 0 K 1 + K 4 G 2


FRONT HOUSING K1 interface

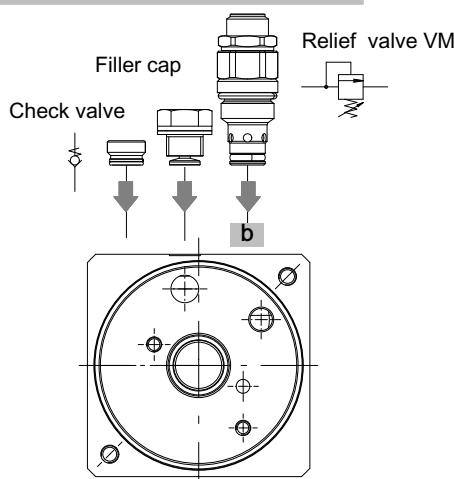

Realizable scheme

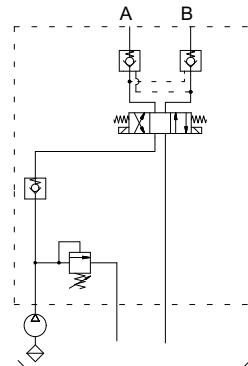


REAR HOUSING K4G2 interface for complete valves circuits

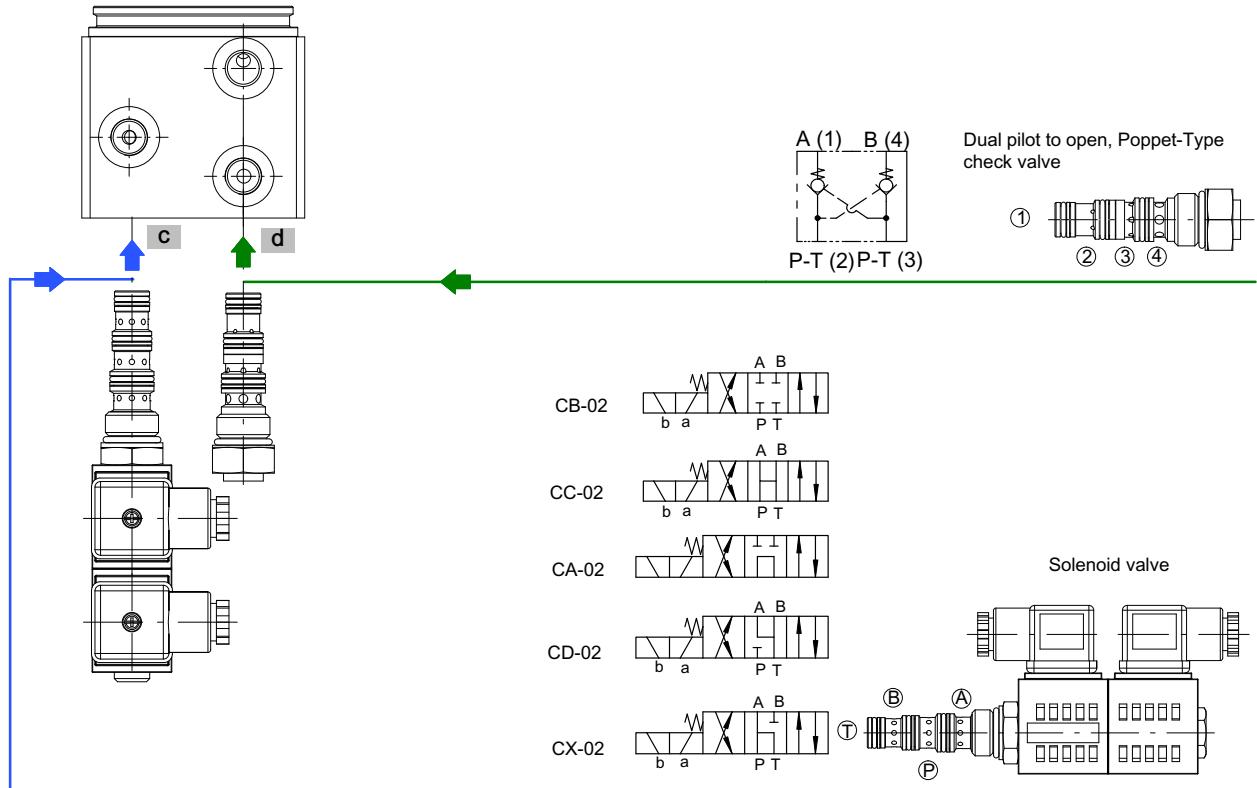

For the availability of new or dedicated hydraulic schemes, please contact our Sales Department.

1.4 Housing UP40 K5 Reversible

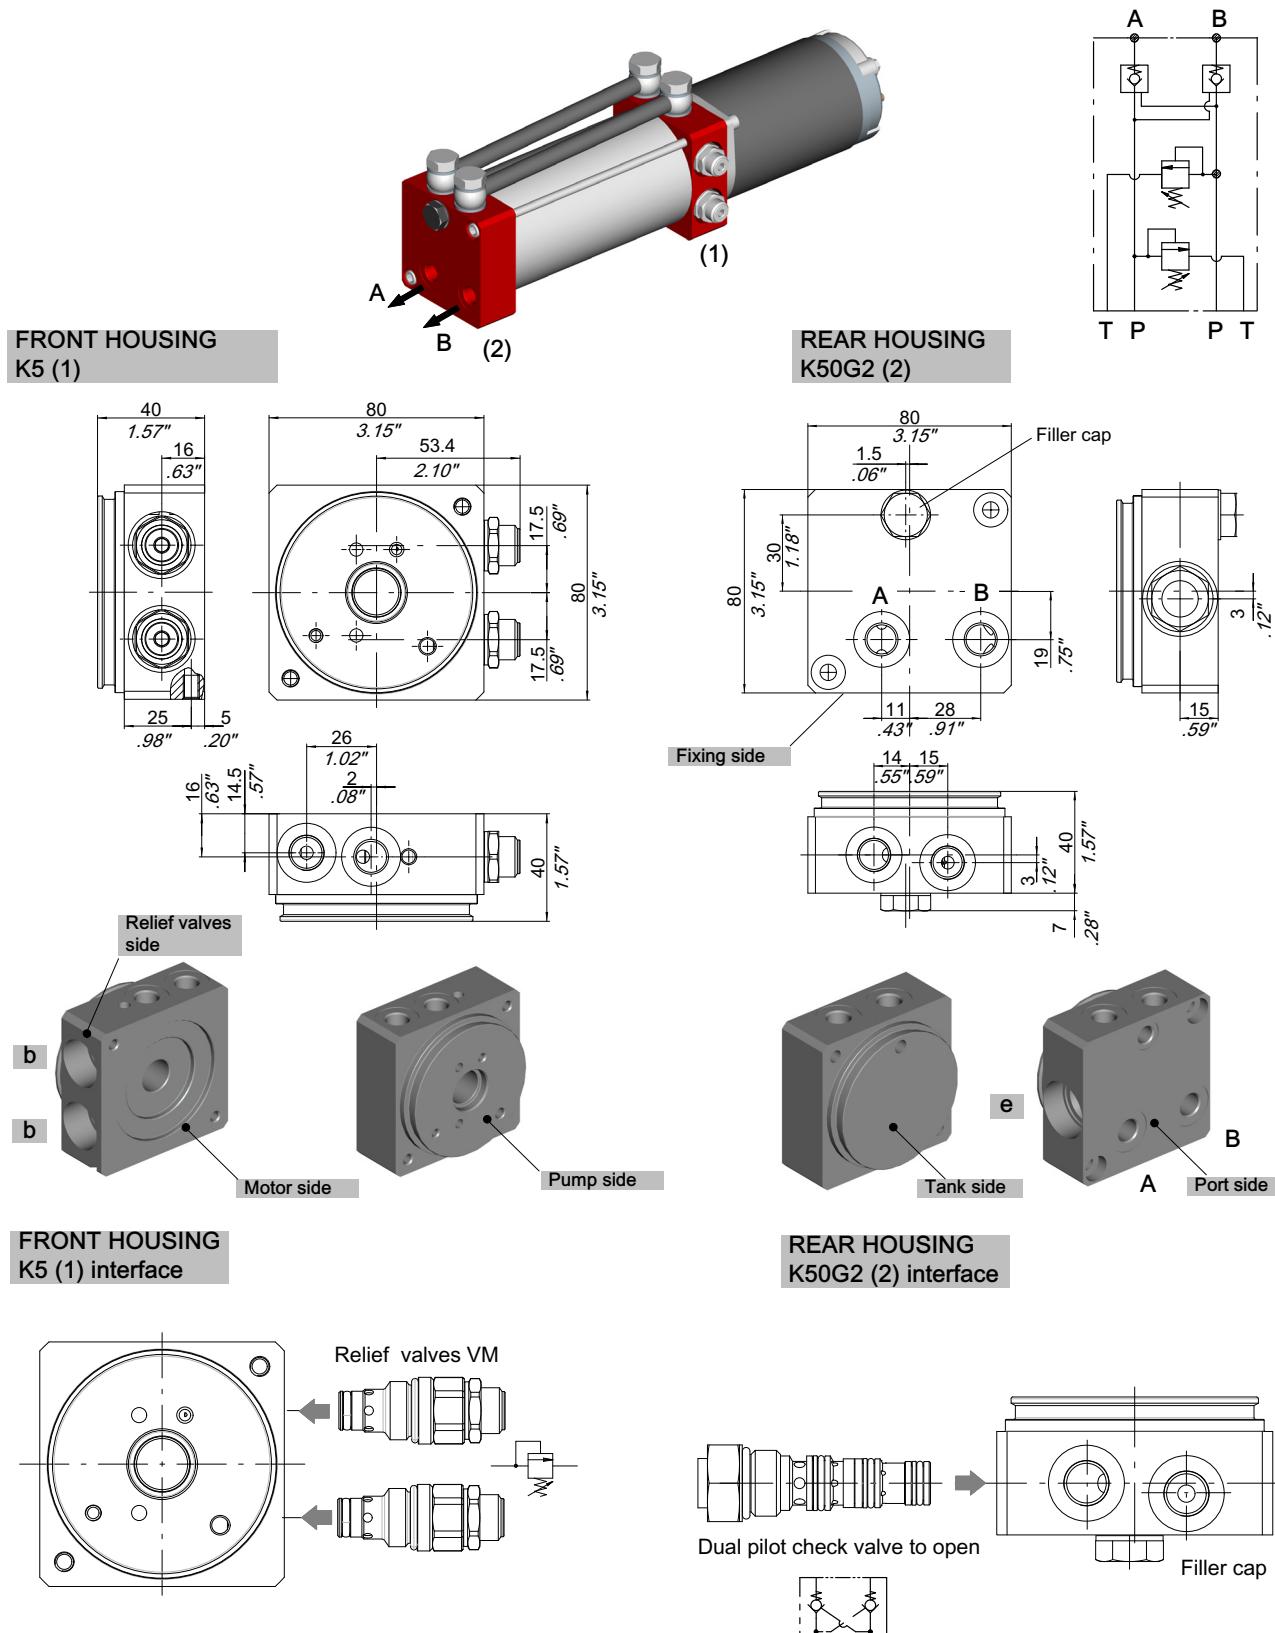

Type	Ports
UP40K5+K50G2	1/4" BSP

Type of housing
1 U P 4 0 K 5 + K 5 0 G 2

2 Gear pumps

2.1 Technical information

2.1.1 Material



Covers: Pressure diecast aluminium alloy

Body: Extruded aluminium alloy

Gears: Casehardened and hardened steel.

Bearings: Aluminium alloy.

Seals: NBR.

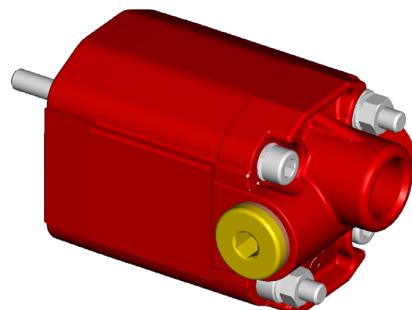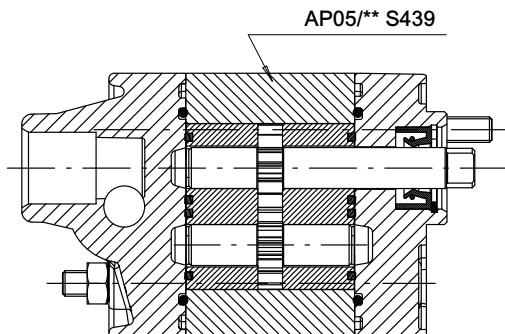

2.1.2 Suitable fluids

Only mineral oil based hydraulic fluids responding to ISO/DIN standard should be used.

Viscosity range:

recommended 20 - 120 mm²/s (cSt)
admitted up to 700 mm²/s (cSt)

Operating temperature range: -15 +80 °C

For other fluids consult our Sales Department.



ATTENTION! Use of pumps at temperatures above 80°C must always be agreed upon with our Technical Office, and in any case this can cause a significant worsening in the volumetric efficiency. For use under conditions different from those indicated in this catalogue, please contact our Sales Department.

2.1.3 Inlet


Absolute pressure at the pump inlet must be:

$V > 0.75 \text{ bar (11 PSI)}$


2.1.4 Outlet

The recommended delivery pipe oil speed is between:

$V = 2 - 5 \text{ m/s.}$

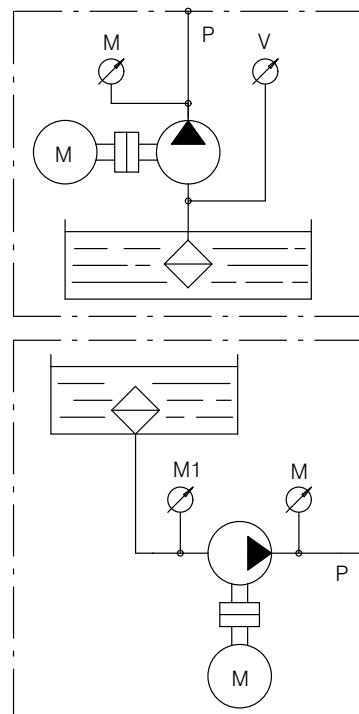


2.2 Gear pumps AP05/** S439 - Counterclockwise rotation In combination with K1 - K1G2 - K4 housings

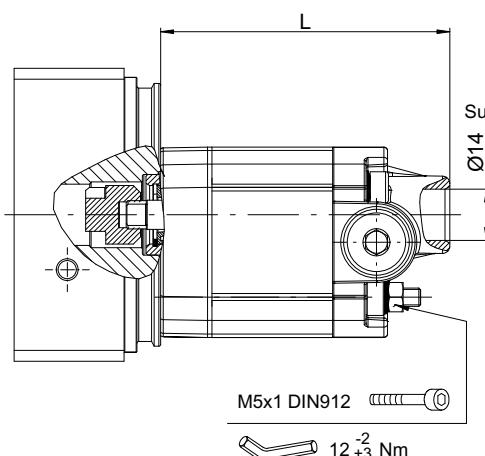

STANDARD
AP05/**-S439

Suction port located in the back cover

Outlet:
Pressure levels:
P1 = continuous operating pressure
P2 = intermittent operating pressure
P3 = peak pressure

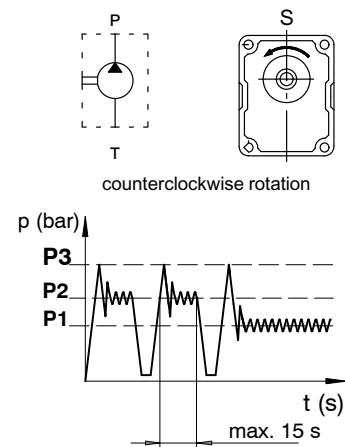

Example

Pump


Series

2	A P 0 5 / 0 , 2 5		S 4 3 9
---	-----------------------------------	--	---------------

Standard version

AP05	Displacement		Order code	L		Max. pressure				n. min.		n. max.		
	Pump type S439	cm ³ /rev				P1		P2		P3		P>P1		
		in ³ /rev		mm	in	bar	PSI	bar	PSI	bar	PSI			
AP05/0.25 S.439	0.25	.015	200100294303	77	3.03	170	2460	180	2610	200	2900	800	3000	7000
AP05/0.5 S.439	0.5	.031	200100394303	79	3.11	190	2750	210	3040	230	3330	650	3000	7000
AP05/0.75 S.439	0.75	.046	200100494303	81	3.19	190	2750	210	3040	230	3330	650	1500	7000
AP05/0.9 S.439	0.9	.055	200100594303	82.5	3.25	190	2750	210	3040	230	3330	650	1500	7000

2.3 Gear pumps APR05/** -S439 - Reversible In combination with K5 - K50G2 housings



APR05	Displacement		Order code	L		Max. pressure				n. min.		n. max.		
	Pump type S439	cm ³ /rev				P1		P2		P3		P>P1		
		in ³ /rev		mm	in	bar	PSI	bar	PSI	bar	PSI			
APR05/0.25 S.439	0.25	.015	200100294401	77	3.03	170	2460	180	2610	200	2900	800	3000	7000
APR05/0.5 S.439	0.5	.031	200100394401	79	3.11	190	2750	210	3040	230	3330	650	3000	7000
APR05/0.75 S.439	0.75	.046	200100494401	81	3.19	190	2750	210	3040	230	3330	650	1500	7000
APR05/0.9 S.439	0.9	.055	200100594401	82.5	3.25	190	2750	210	3040	230	3330	650	1500	7000

3 Tanks

3.1 Technical information

Materials: aluminium.

Color: Aluminium (Standard)

Condition of use: Suitable fluids: mineral oil based hydraulic fluids responding to ISO -DIN standards.

Hydrocarbon based fluids (e.g. benzene, benzol, etc.) must not be used.



Versions: tanks are available in different capacity, allowing installation of the power pack in horizontal or vertical positions (see note).




ATTENTION!

Whilst the fixing and sealing systems are designed for operation under the most heavy-duty conditions, the unit must be securely anchored when fitted to mobile equipment.

Bucher suggests to protect the nearest environment toward eventual oil leakage that may occur.

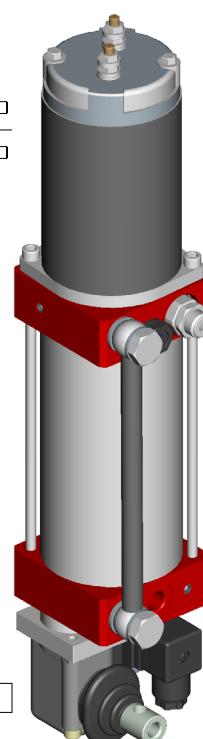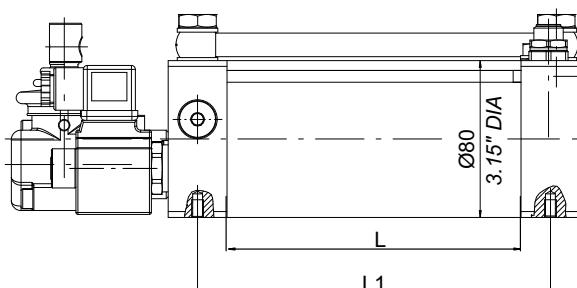

Horizontal position P01 only

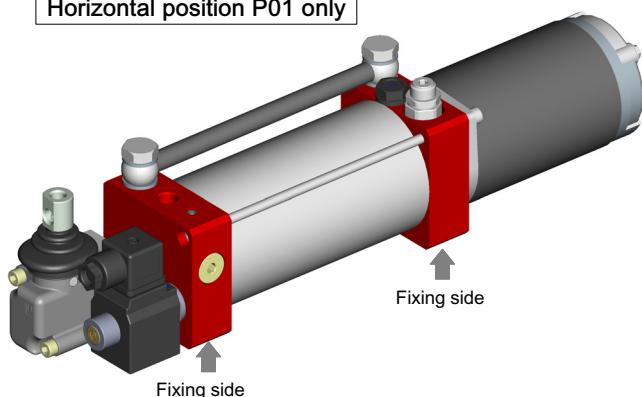

Vertical position P15

IMPORTANT!: Other horizontal positions are not admitted due to suction filter and filling plug.

The opposite position of P15 is not possible.



For P15 position, before the assembling, might need filling the tank with a proper syringe or similar device.

Nominal capacity		Type/Code	L		L1		Suction capacity			
					K1-K4-K50					
I	cu inch	Type/Code	mm	in	mm	in	mm	in	Horizontal	Vertical
0.5	30.5	L-005R	200672010010	150	5.91	180	7.09	190	7.48	0.45
1.2	83	L-012R	200672090020	325	12.79	355	13.98	365	14.37	1.15
1.5	91.54	L-015R	-	355	13.98	385	15.16	395	15.55	1.15

For other types of tanks capacity please contact our Sales Department.

4 Suction assembly.

Standard version S439 Ø14 for vertical and horizontal positions

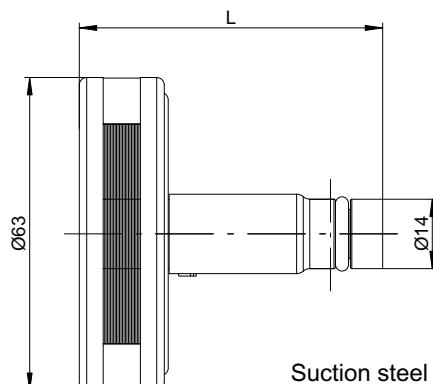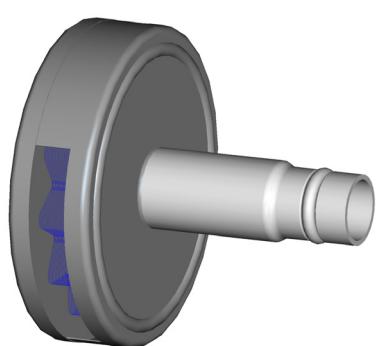

Suction steel filter: 30µm nominal wire mesh

Nom capacity		Type/Code		L	
I	cu inch			mm	in
0.5	30.5	L-005R	200672010010	61	2.41
1.2	83	L-012R	200672090020	235	9.25
1.5	91.54	L-015R	-	265	10.43

For the combinations of the suction assembly kits for other tanks, horizontal/vertical positions please consult our Sales Department.

5 Electric motors

Electric motor available:

5.1 D.C. motors

Generally used for mobile applications

5.1 D.C. Electric motors

5.1.1 Technical information

Available versions:


Voltage: 12-24 V

Power rating: 0.5 ÷ 0.8 kW.

For different input voltage and power rating, consult our Sales Department.

Direction of rotation:

Unless otherwise stated, all motors are specified clockwise

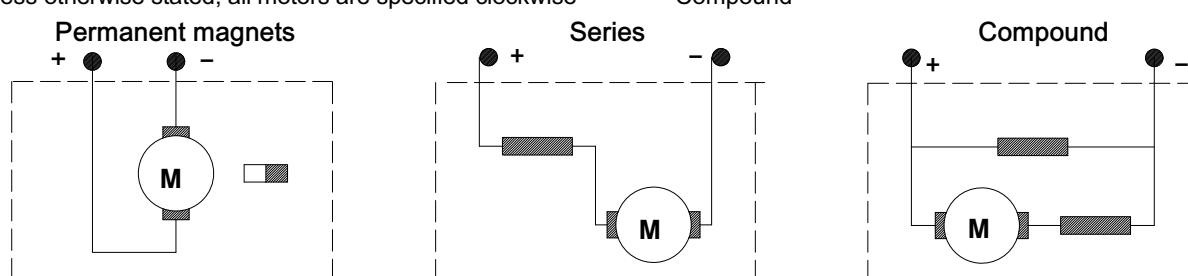

Insulation class:


The class of electric insulation reflects the maximum temperature the motor can register during operation without damage to the insulating material internally of the motor itself.

The following table indicates insulation classes to CEI 15-26.

Class	Y	A	E	B	F	H
Temperature (°C)	90	105	120	130	155	180

Type of duty:

To ensure selection of the electric motor best suited to a given set of operating conditions, the duty cycle needs to be verified. Duty cycles S1, S2 and S3 are defined below in accordance with CEI 2-3

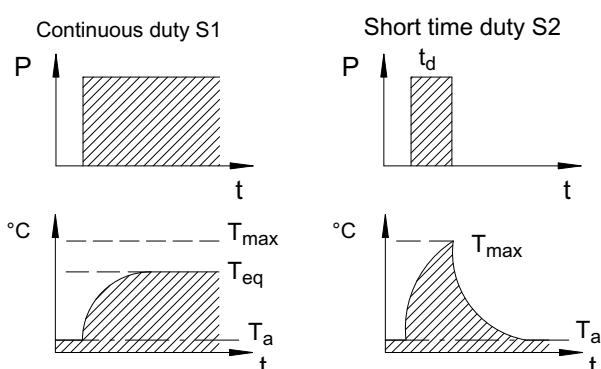


P = load
 T_{eq} = temperature at thermal equilibrium
 T_{\max} = maximum permissible temperature
 T_I = operating temperature

rotation, suitable for driving counterclockwise pump.

Type of winding:

D.C. motors can be manufactured in different types of field windings:

- Permanent magnets (STANDARD)
- Series
- Compound

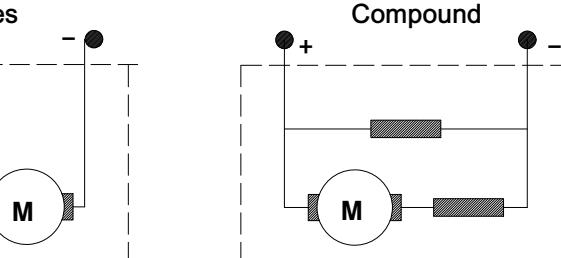

Continuous duty S1:

Operation on-load (steady conditions) for a period of indefinite duration, during which the motor reaches thermal equilibrium without exceeding the maximum permissible temperature.


Short time duty S2

Operation on-load (steady conditions) for a period of limited duration, denoted t_d in the diagram, during which maximum permissible temperature is reached, followed by an off-load period of duration sufficient for the temperature of the motor to return to ambient temperature.

Intermittent duty S3

A sequence of identical cycles, each 10 minutes in duration, the single cycle comprises a period of operation on-load t_d , during which the motor may reach its maximum permissible temperature, is reached, followed by an off-load period of limited duration t_m , insufficient for the temperature of the motor to return to ambient temperature.


The value of S3 indicates the duration of the on-load period t_d in relation to the overall cycle time t_p , as a percentage.

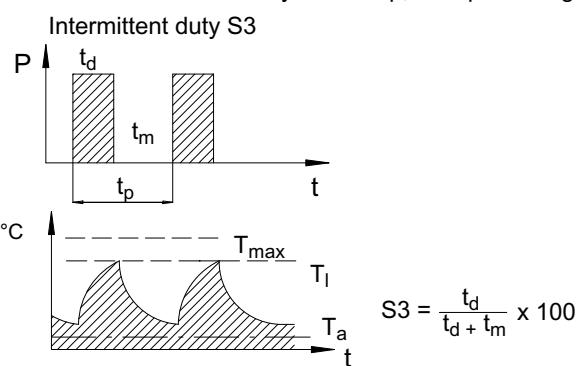

T_a = ambient temperature
 t_d = duration of on-load period
 t_m = duration of off-load period
 t_p = duration of cycle (10 min.)

Degree of protection:

This indicates the level of protection afforded in preventing contact between live parts of the motor and people or foreign matter generally, and preventing the penetration of water.

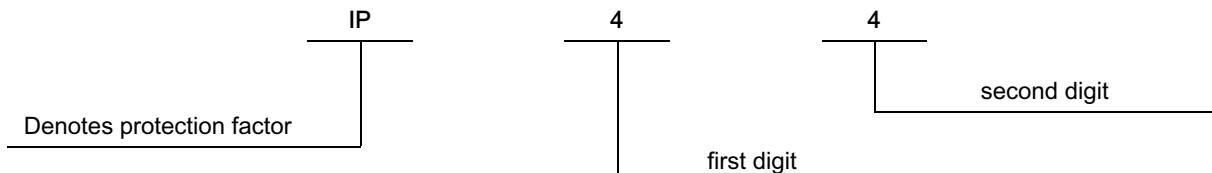


The first digit indicates the degree of protection afforded to the motor against contact with people or foreign bodies.

0	no protection
1	protection against solid bodies measuring > 50 mm
2	protection against solid bodies measuring > 12 mm
3	protection against solid bodies measuring > 2.5 mm
4	protection against solid bodies measuring > 1 mm
5	protection against dust

The degree of protection is indicated in accordance with CEI 2-16 by the initials IP and two identifying digits:

Example:

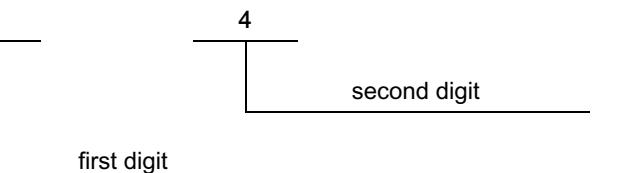


The second digit indicates the degree of protection afforded to the motor against the effects of penetration by water.

0	no protection
1	protection against water dripping vertically
2	protection against water dripping at 15° max
3	protection against rain
4	protected against water splash
5	protected against water spray

5.1.2 Characteristic curves

Characteristic curves are given for each motors, from which to establish pressure, flow rate and current consumption

values, and S2 and S3 duty cycles.

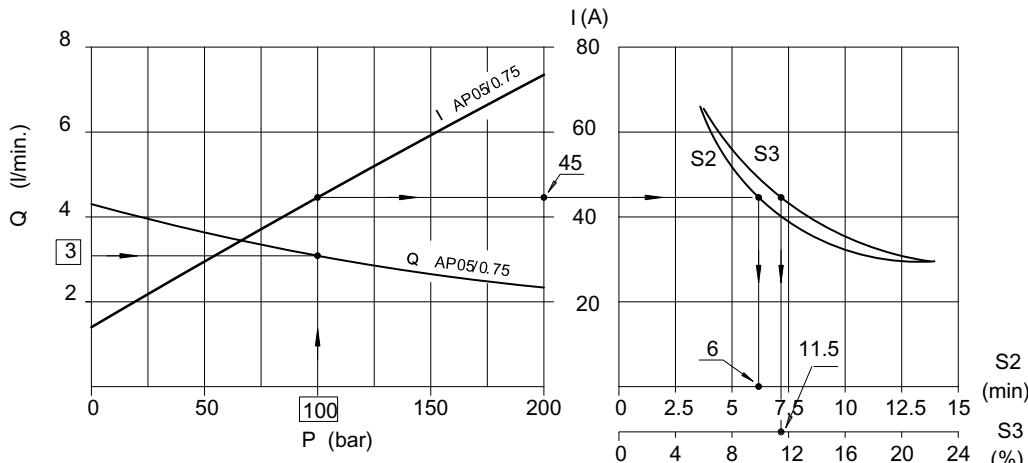

5.1.3 Example of how the graphs are used

Required data

Flow rate $Q = 3 \text{ l}/\text{min}$

Pressure $p = 100 \text{ bar}$

Pump displacement

Determined by the intersection of the required p and Q curves.

In the example indicated, pump AP05/0.75 has the required p and Q specifications.

In the event that there is no point of intersection with any curve, a displacement as near as possible to the required flow rate should be selected.

Current consumption

This is determined by taking a vertical line from the pressure value to its point of intersection with the I curve corresponding to the selected displacement.

In the example illustrated, current consumption is:

$$I = 45 \text{ Ampere}$$

Type of use

Having established the current, the relationship of the S_2 and S_3 curves will give the following values:

$$S_2 = 6 \text{ min.} \quad S_3 = 11.5\%$$

Terminals

Unless otherwise stated, d.c. motors supplied by Bucher Hydraulics S.p.A. have two terminals.

Poles are identified in accordance with IEC34-8

A1 - A2 Armature

D1 - D2 Series

B1 - B2 Poles

E1 - E2 Parallel

Electric diagram

A typical arrangement for connection of the motor to the power supply is shown in the diagram.

5.1.4 Mounting directions




The tie bolts must not be withdrawn completely while fitting motor, but retracted just for a short distance (30-50 mm max).

Once fitted to the power pack, the motor should be run off-load momentarily (5 seconds max) to verify its correct operation: supply power to the windings and measure the current drain, which must not exceed 35 Ampere.

Power cable

The wire selected for power connections must be of cross section appropriate for the rated current of the motor.

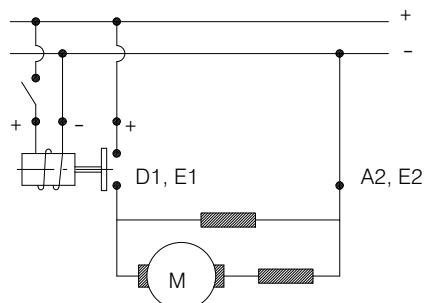**Tightening torques**

When assembling the motor and power pack and securing the wires of the power cable to the motor terminals, observe the tightening torque values indicated.

Brush life

The brushes will wear down progressively with continued operation of the motor, and must be replaced when reduced to their minimum useful length.

Since the rate of wear on the brushes is dictated by the operating conditions and cannot therefore be broadly specified, consult our Sales Department for guidance.

Bucher Hydraulics S.p.A. is not an electric motors manufacturer so these components come from third part. Bucher Hydraulics S.p.A. reserves the right to change the motor supplier whenever considers it necessary without notice

5.1.5 Starter Relays - Technical information

Versions:

Available voltage: 12-24 V

See relative table for technical data for:

- Electrical insulation class

- Type of duty


- Protection factor:

The level of protection is defined according to the same parameters as listed for electric motors.

Contact life:

The contacts of the relay will wear down progressively during operation.

Since the rate of wear is dedicated by the type of duty and cannot therefore be broadly specified, consult our Sales dept. for guideline information.

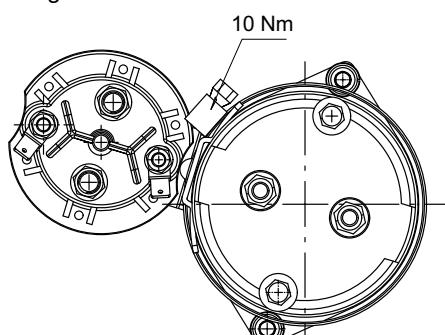

Fixing with clip

Fitment to electric motor


Starter relays can be fitted to the frame of the motor by a metal clip.

The relay is secured by means of a clip encircling the motor frame and inserted through special slots in the feet of the relay itself.

In this instance, several mounting positions are possible.


Electrical diagram

A typical arrangement for connection of the relay to the electric motor is shown in the diagram.

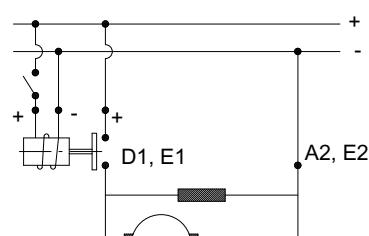

Electric diagram




Heavy duty (STANDARD for wide range of DC el. motors)

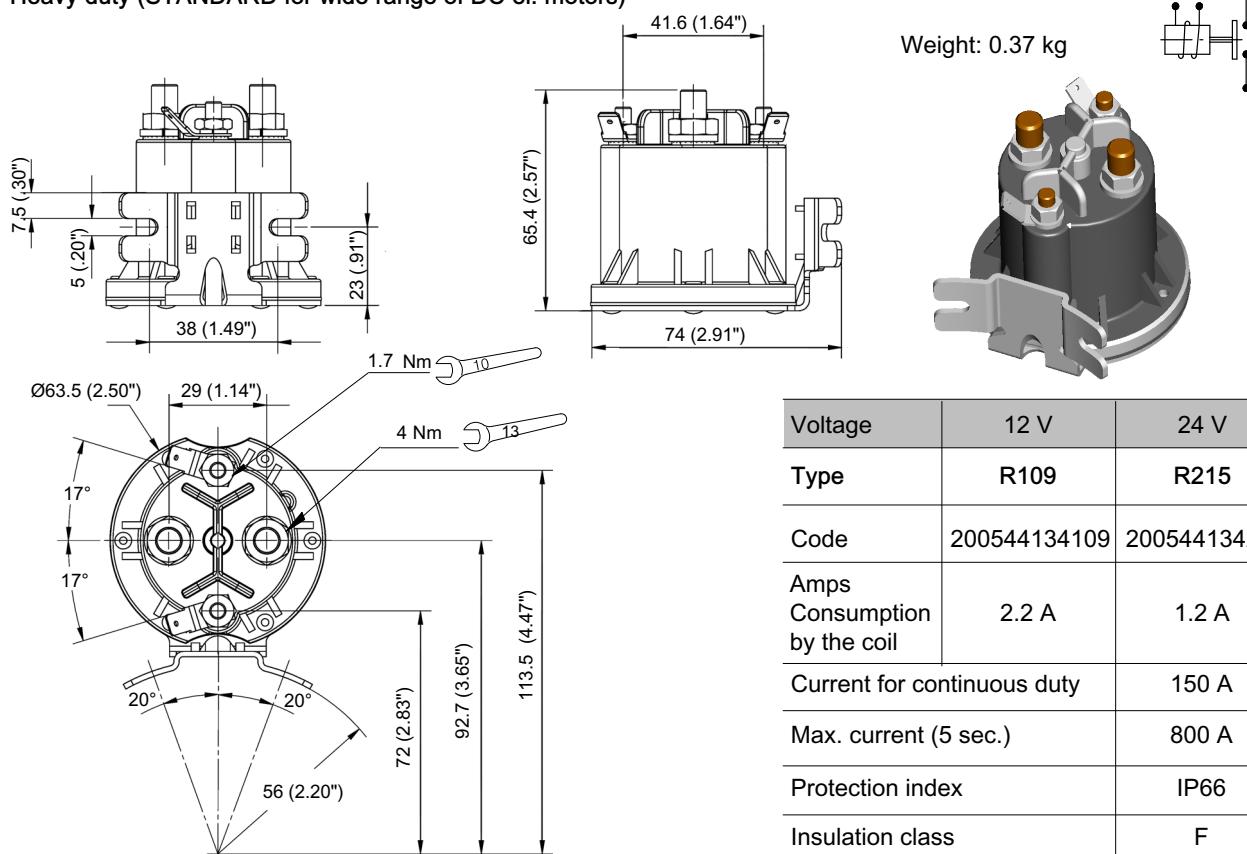

Voltage	Nominal Power
12 V	500 W
24 V	500 W

Protection index: IP54
 Insulation class: F
 Type of winding: Permanent magnets
 Rating output power : 500 W
 Character of work: S2 5 min, S3 17%

Weight: 2.50 Kg (4.96 lb)

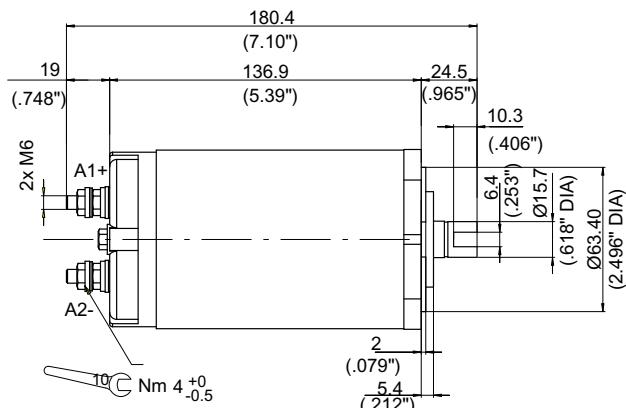


Attention!
 Utilising unidirectional pump,
 verify the electrical connection.
 The motor must rotate
 clockwise (CW)


	Motor		Motor with relay		
	12 V - 500 W	24 V - 500 W			
Type	C120PD/C0	C220PD/C0			
Code	200543912003	200543922004			
Relay					
Relay type					

Motor mounting position

Standard positions

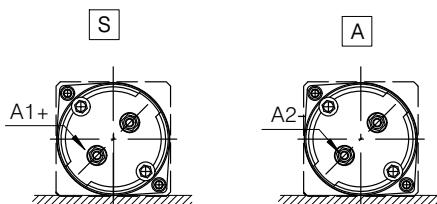

Relay standard position




5	Electric motor		Pos.						
	C	1	2	0	P	D	/	C	0


Example

Relay		Pos.

12 V - 500 W


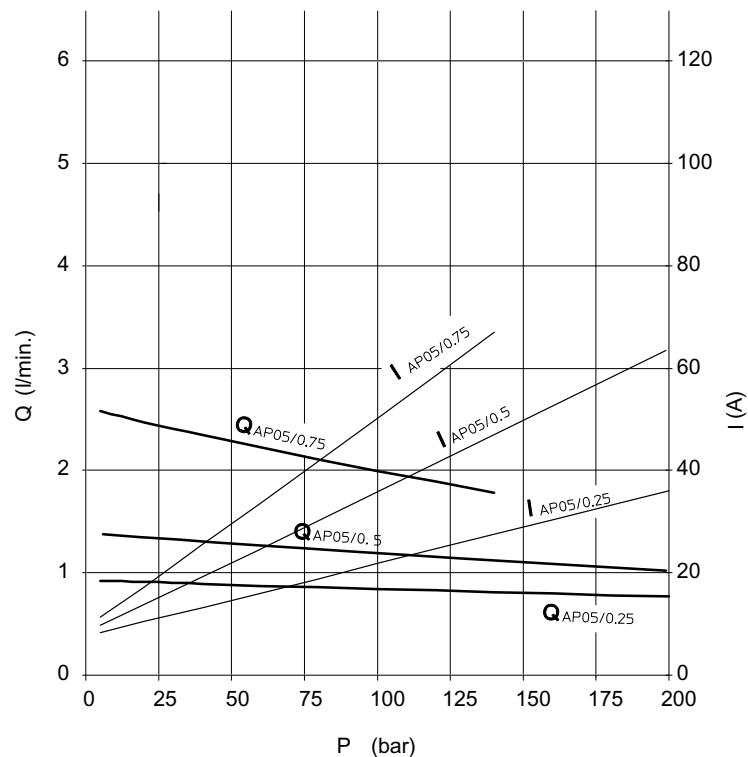


24 V - 500 W

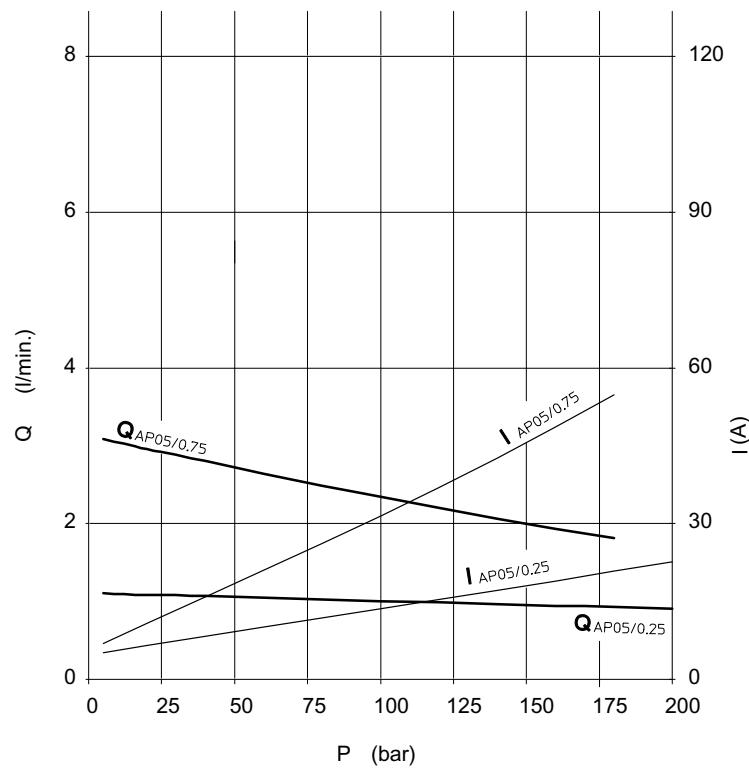

Voltage	Nominal Power
12 V	800 W
24 V	800 W


Protection index: IP54
 Insulation class: F
 Type of winding: Permanent magnets
 Relay fixing kit 200709000090
 Minimum brushes length: 5 mm (0.2 inches)

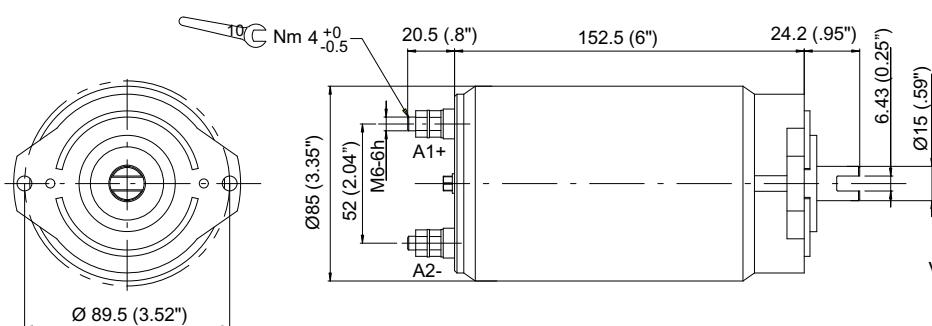

Attention!
 Utilising unidirectional pump,
 verify the electrical connection.
 The motor must rotate
 clockwise


Weight: 3.70 Kg (8.15 lb)

	Motor		Motor with relay		
	Rotation reversible	12V-800W	24V-800W	12V-800W	24V-800W
Type	C128PK/A0	C228PK/A0	C128PK/A0 + R109	C228PK/A0 + R215	
Code	200543912809	200543922801	200763310270	200763320300	
Relay			Standard		
Relay type			R109	R215	




Motor mounting position

Standard positions

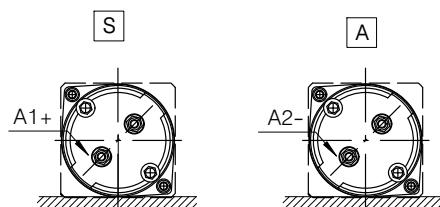

Relay standard position




Electric motor		Pos.
5	C 2 2 8 P K / A 0	S


Example

Relay		Pos.
R 2 1 5		F

12 V - 800 W

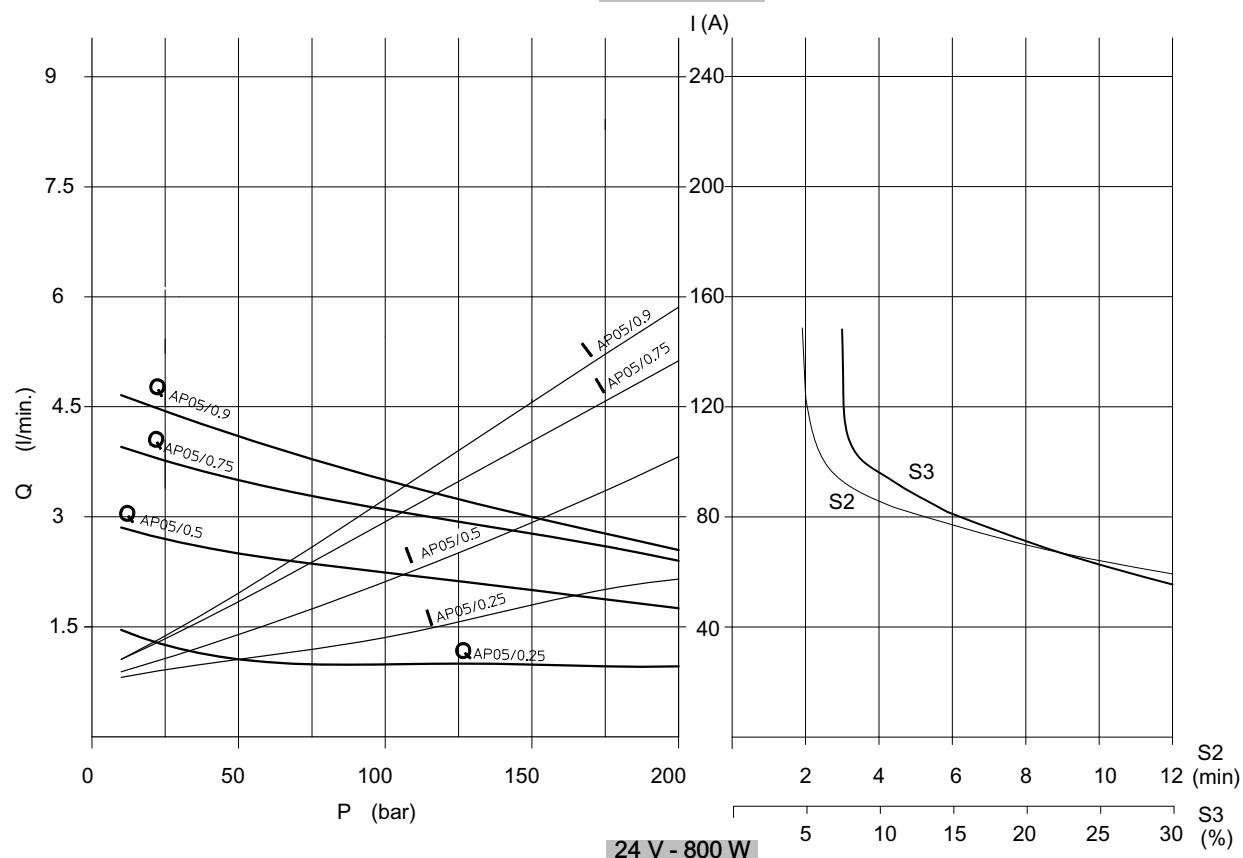


24 V - 800 W

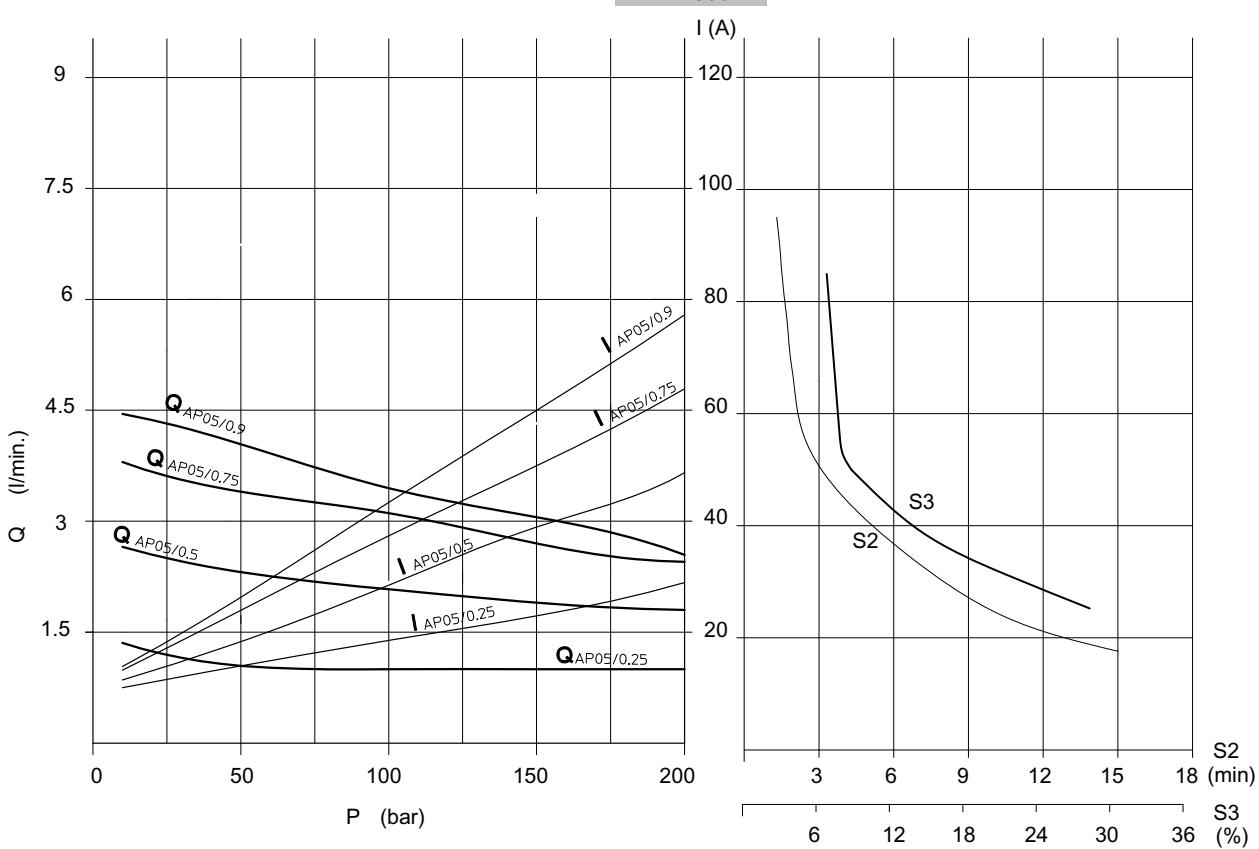

6 Drives

6.1 Couplings

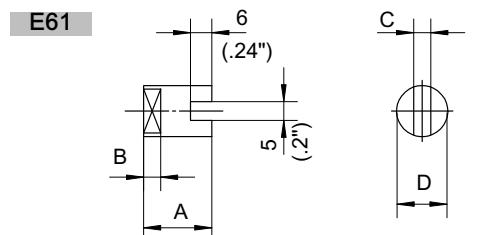

Motor type	Drive system	Coupling code	Dimensions			
			A	B	C	D
C120PD	E61	200659600110	15	5.5	6.4	16
C220PD			.6"	.22"	.26"	.63"
C128PK						
C228PK						

7.1.5 General notes on D.C. power input

A swift and secure coupling is obtained using the special connector (type 200544110009).

The cable coming from the D.C. power source (batteries, rectified a.c. main supply, etc.) must be connected as indicated in the diagram (figure 1).

The negative and positive polarity of the wire need not be verified for connection purposes.


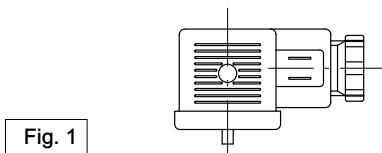


Fig. 1



Direct current


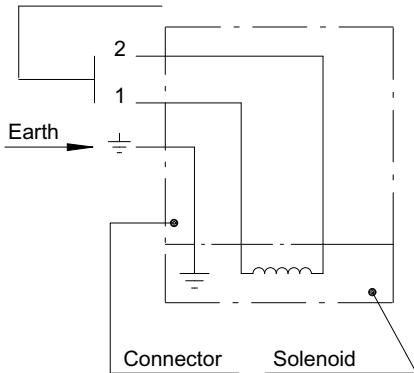


Fig. 2

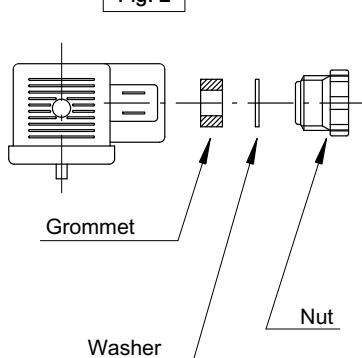

Wachsmann





Fig. 3



Alternative current (A.C.)


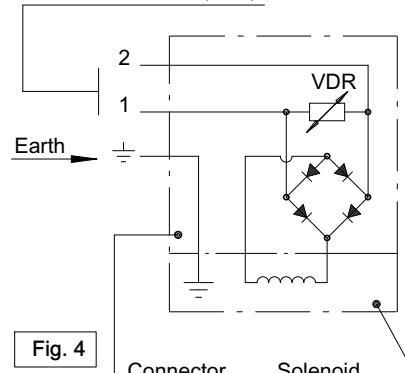


Fig. 4

For users wishing to make up special circuits and blocks with Bucher Hydraulics S.p.A. cartridge valves, it is

important to observe the indications given below when machining the valve cavities.

Relief and solenoid valves +
hand pump PM817 cavity

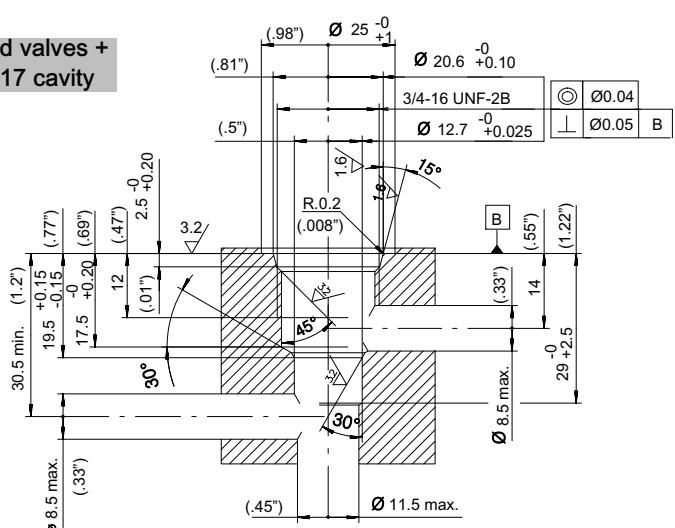

7.2 Pressure relief valves


7.2.1 Pressure relief valve: VMD

Direct acting

Balanced piston

Adjustable setting

Three pressure setting ranges

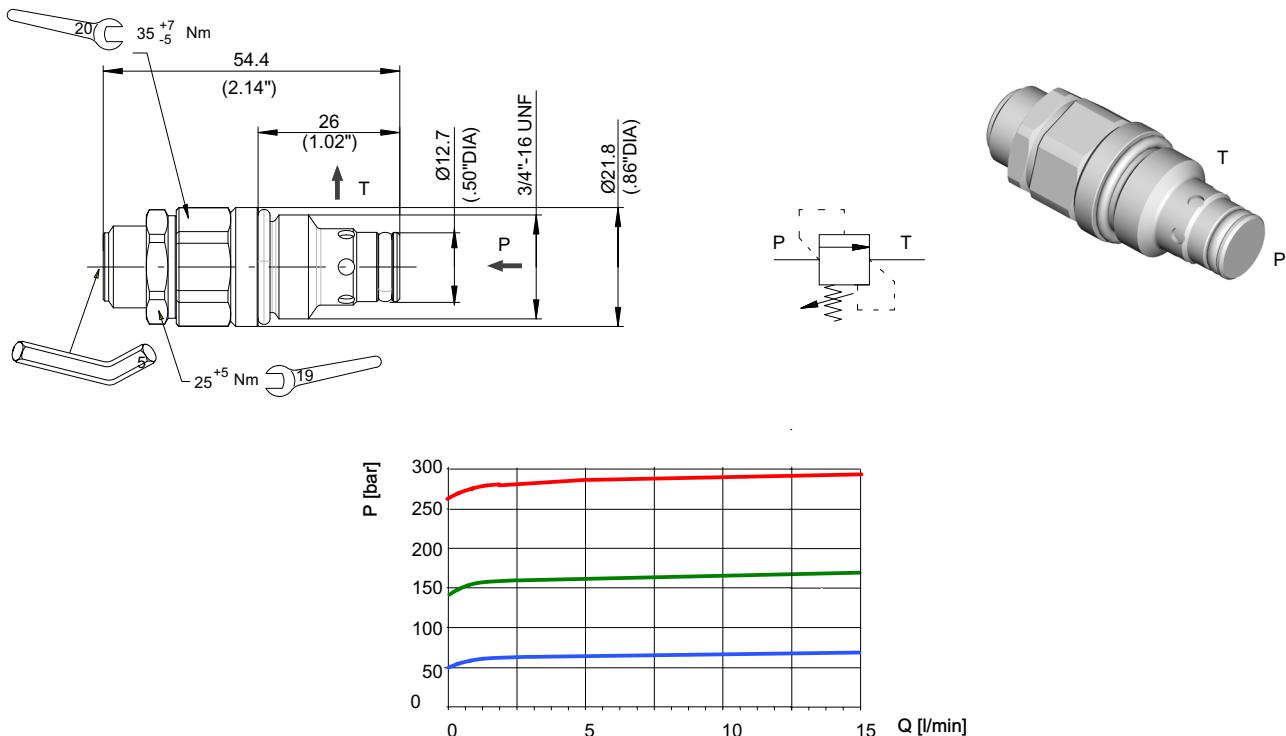

The purpose of a relief valve is to keep the maximum system pressure at a safe level. When the hydraulic power unit is supplied with pressure relief valves, the correct calibration is provided by Bucher Hydraulics S.p.A. and there are no reasons to change this value.

* Max pressure admitted as single valve inside UP40 power: 190 bar (peak 230 bar, see section 2.2).

Pressure setting

For preset values other than those indicated, replace the first two digits of the designation with the setting required. For example, required setting 150 bar: designation type 15VMD. Always check that the required value falls within the standard ranges of adjustment.

Performances	
Max. Flow rate	15 l/min.
Max. Pressure	290 bar *
Weight	0.100 kg
Oil temperature	-20 to 90 °C
Recommanded filtration	21/19/16 (10 NAS 1638)


Spring	Type	Setting range	Code
00	T817/2	Plugged	200778800020
Y	05VMD	20-70 bar	200533930480
N	15VMD	50 - 180 bar	200533930481
B	20VMD	100 - 290 bar (*)	200533930142

7.3 Solenoid operated directional valves

Circuit	Solenoid	Override	Type	Power	Description	Page
Normally closed	On-Off	Without manual override			Standard version	
			Piloted	standard (16 Watt)		SPD817/22-TV
			Direct acting	heavy duty (27 Watt)	SDF817/22-TH	
		With manual override	Piloted	standard (27 Watt)	SPFE817/22-TV	
			Direct acting	heavy duty (27 Watt)	SDFE817/22-TH	
	Proportional	Without manual override	Piloted	standard (20-26 Watt)	PDF817/HSC	
			Piloted	standard (20-26 Watt)	PDF817/HSC	
			Piloted	standard (20-26 Watt)	PDF817/HSC	
		With manual override	Piloted	standard (27 Watt)	SPFE817/22-TOV	
			Piloted	standard (27 Watt)	SPFE817/22-TOV	
Normally open	On-Off	Without manual override			Standard version	
			Piloted	standard (27 Watt)		SPF817/22-TOV
		With manual override	Piloted	standard (27 Watt)	SPFE817/22-TOV	
			Piloted	standard (27 Watt)	SPFE817/22-TOV	


7.3.1 Solenoid operated directional valve:
SPD817/22-TV

Normally closed
Piloted - 16 W
Poppet type
Flow from 1 to 2

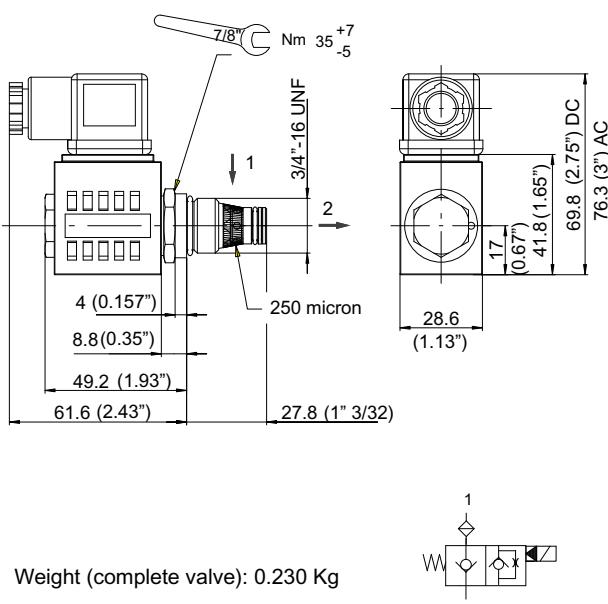

Performances

Max. pressure	270 bar
Max. recommended pressure	See 2.2
Max. flow	20 l/min.
Rated power	16 Watt
Intermittence	ED= 100%
Voltage tolerance	± 10%
Internal leakage	0-5 drops/min.
Temperature range	-20/+90 °C
Connector type	DIN 43650
Time to open 12 V 20 l/min 80% of final change of state	16 ms.
Time to close 12 V - 20 l/min 80% of final change of state	18 ms.
O-Ring replacement kit	200974200480

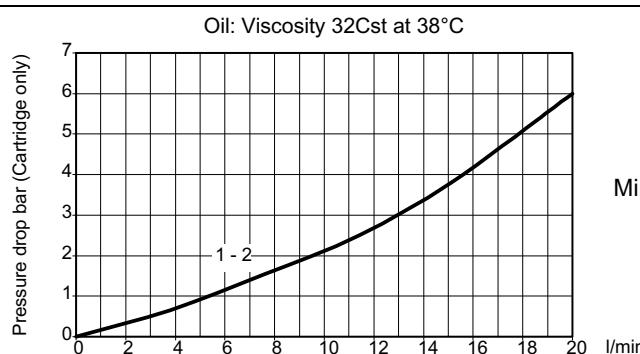

Directional valve without coil and connector

Type	Code
SPD817/22-TV P.M.	200533910019



Complete solenoid valve for D.C. current

Type	Code
SPD817/22-TV-13-HC	200957010084
SPD817/22-TV-23-HC	200957020076

Coil voltage - A.C. supply requires a connector with bridge rectifier included.

18 Watt	D.C.		A.C.			
	Volt	12 V.	24 V.	24 V.	110 V.	220 V.
Type	13	23	21	41	51	

Complete solenoid valve for A.C. current

Type	Code
SPD817/22-TV-21-HC	200956920052
SPD817/22-TV-41-HC	200956940047
SPD817/22-TV-51-HC	200956960053

7.3.2 Solenoid operated directional valve:
SDF817/22-TH - SDFE817/22-TH

Normally closed



Poppet type

Direct acting - 27 Watt


Flow from 1 to 2

With (SDFE) or without (SDF) manual override


Manual override = push to open

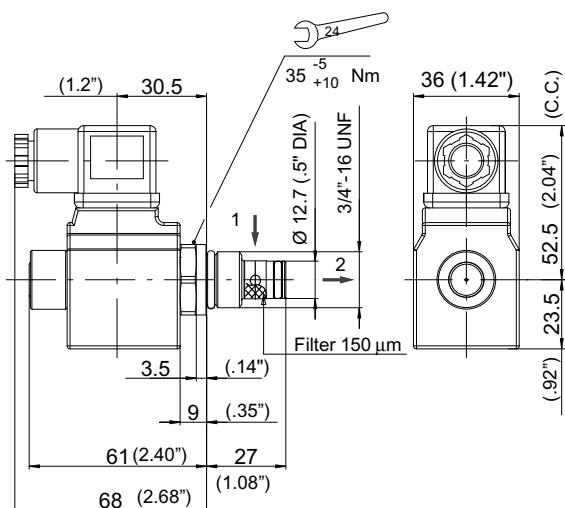

Weight (mechanical part only): 0.121 Kg

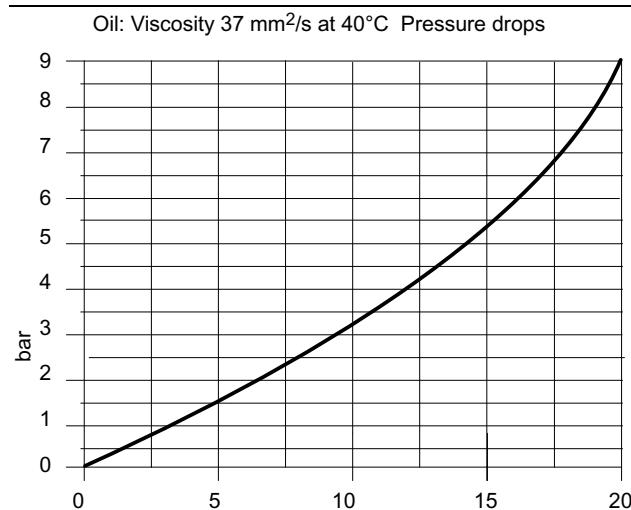

Performances	
Max. pressure	230 bar
Max recommended pressure	See 2.2
Max. flow	15 l/min. 230 bar
Rated power	27 Watt
Intermittence	ED= 100%
Voltage tolerance	± 10%
Internal leakage	0-5 drops/min.
Temperature range	-20/+90 °C
Connector type	DIN 43650
Time to open (50-210 bar)	15-50 ms.
Time to close (50-210 bar)	10-50 ms.

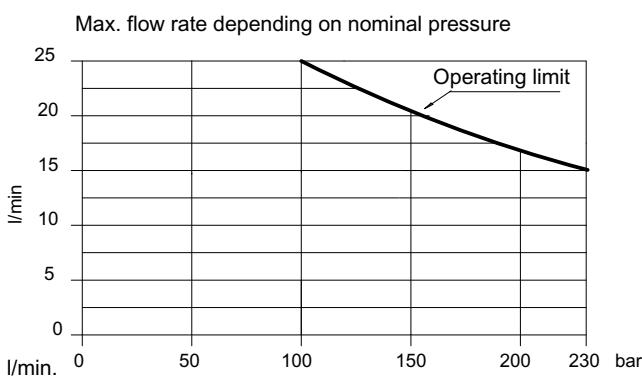


Type	Code*
ELVAL SDF817/22-TH P.M.	200757200940
ELVAL SDFE817/22-TH P.M.	200757200970

* Mechanical part code only. For connector and coil see section: 7.3.5 - 7.3.6




SDF817



SDFE817

7.3.3 Solenoid operated directional valve:
SPFE817/22-TV


Normally closed
Poppet type
Piloted (27 W)
Flow from 1 to 2
With manual override (screw type)
Manual override = unscrew to open

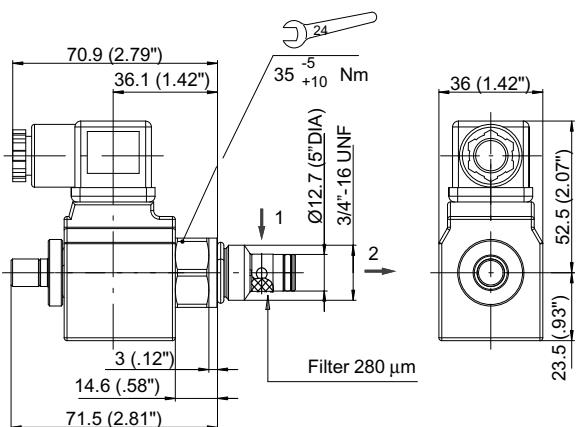


Performances

Max. pressure	350 bar
Max. recommended pressure	See 2.2
Max. flow	40 l/min.
Rated power	27 Watt
Intermittence	ED= 100%
Voltage tolerance	± 10% / -15%
Internal leakage	0.25 cm ³ /min.
Temperature range	-20/+90 °C
Connector type	DIN 43650
Time to open	<= 30 ms.
Time to close	<= 50 ms.

Weight (mechanical part only): 0.118 Kg



Oil: Viscosity 46 cSt at 40°C

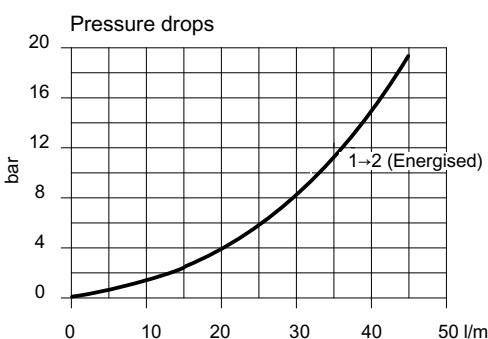

Minimum suggested working pressure = 5 bar

Type	Code*
ELVAL SPFE817/22-TV P.M.	200757200960

* Mechanical part code only. For connector and coil see section: 7.3.5 - 7.3.6



7.3.4 Solenoid operated directional valve:
SPF817/22-TOV - SPFE817/22-TOV

Normally open


Poppet type

Piloted (27 W)

Flow from 1 to 2


With (SPFE) or without (SPF) manual override (pin type)

Manual override = push to open

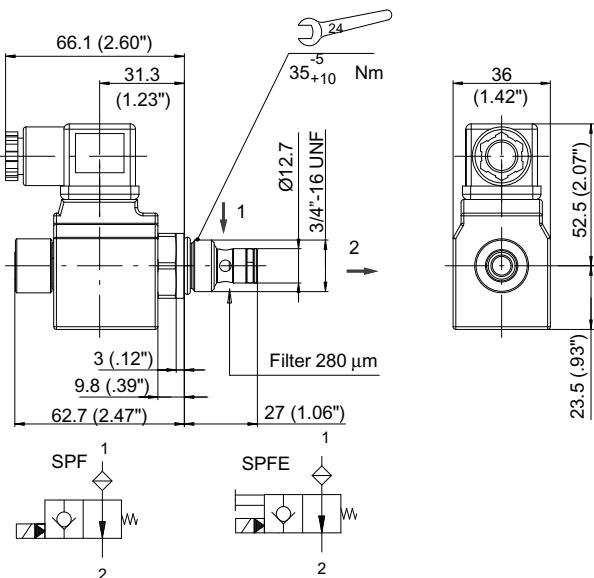

Weight (mechanical part only): 0.120 Kg


Oil: Viscosity 46 cSt at 40°C

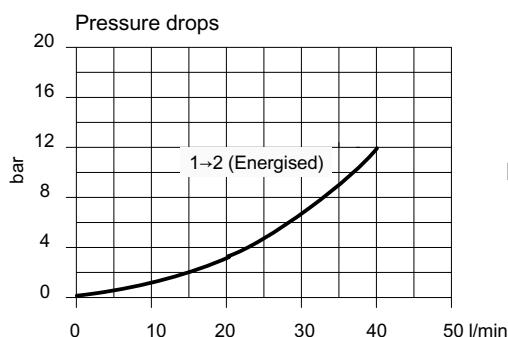


Minimum suggested working pressure = 5 bar

Type	Code*
ELVAL SPF817/22-TOV P.M.	200757200980
ELVAL SPFE817/22-TOV P.M.	200757200990

* Mechanical part code only. For connector and coil see section: 7.3.5 - 7.3.6

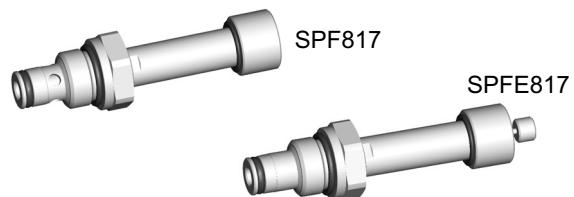


7.3.5 Directional valve solenoids

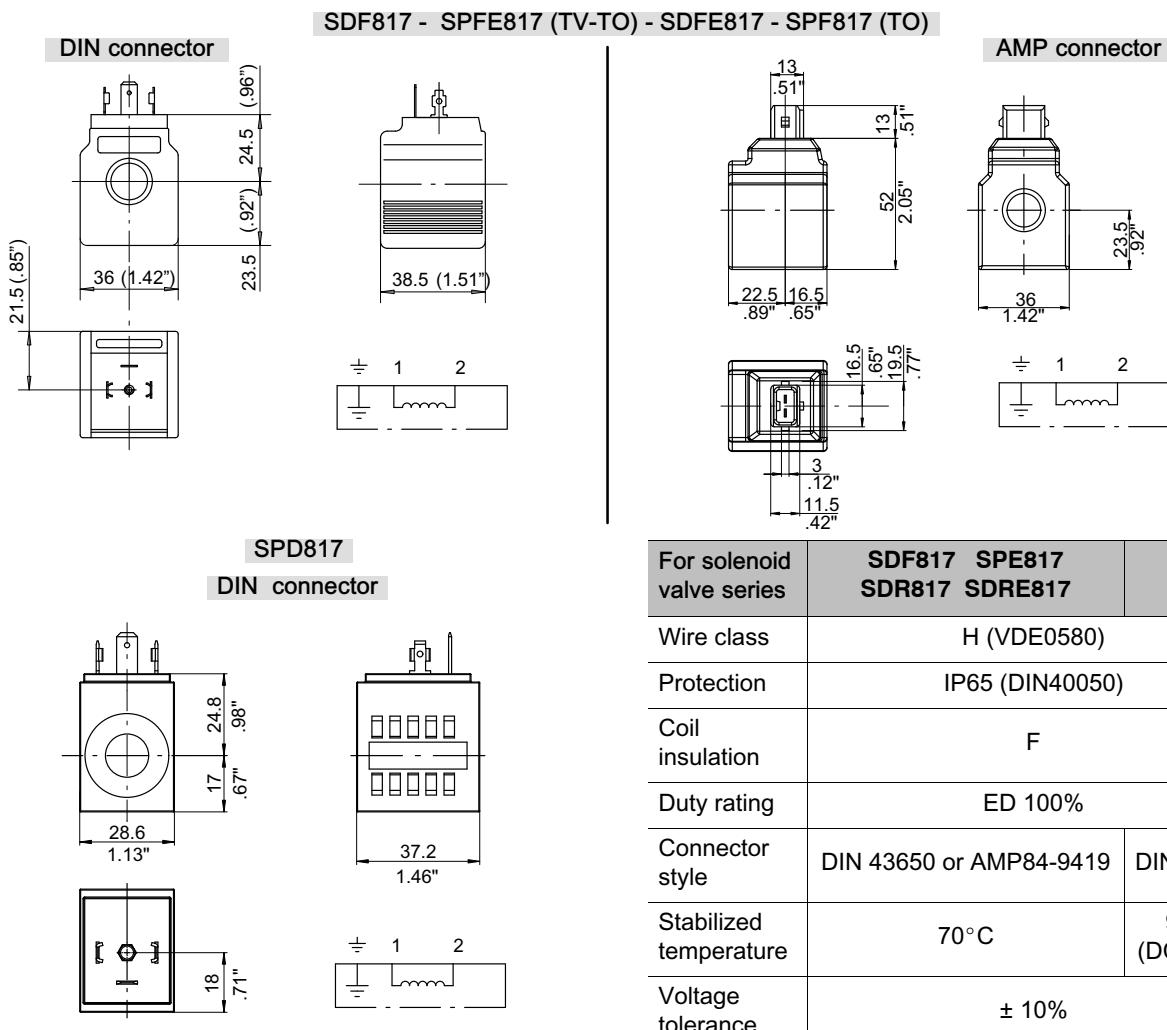


Connector style		Supply Voltage	Nominal Coil voltage	Power (Watt)	Resistance (Ohm)		Current (Ampere)		Coil code	
					Ambient temp.	Stabil. temp.	Ambient temp.	Stabil. temp.		
SDF - SPFE - SDFE - SPF	DIN	12 V. DC.	12 V. DC.	27.2	5.3	8	2.2	1.5	200674910100	
		24 V. DC.	24 V. DC.	27	21.3	32	1.12	0.75	200674920080	
		48 V. DC.	48 V. DC.	27	85.3	130	0.56	0.37	200674930030	
		24 V. AC.	21.6 V. DC.	27.1	17.2	26	1.25	0.83	200674820050	
		110 V. AC.	98 V. DC.	27	355	530	0.27	0.18	200674840050	
		220 V. AC.	198 V. DC.	27.6	1422	2130	0.14	0.10	200674860060	
AMP		12 V. DC.	12 V. DC.	27.2	5.3	8	2.2	1.5	200674910250	
		24 V. DC.	24 V. DC.	27	21.3	32	1.12	0.75	200674920200	
SPD	DIN	12 V. DC.	12 V. DC.	16	9	11.4	1.35	1.09	200541210039	
		24 V. DC.	24 V. DC.	16	36	46.2	0.667	0.53	200541220037	
		24 V. AC.	21.6 V. DC.	16	27.7	34.4	0.713	0.592	200541120015	
		110 V. AC.	108 V. DC.	16	843	1053	0.15	0.1	200541140014	
		220 V. AC.	216 V. DC.	16	3364	4168	0.624	0.498	200541160016	

A.C. Supply requires a connector with bridge rectifier included.


7.3.6 Connector for solenoid directional valves

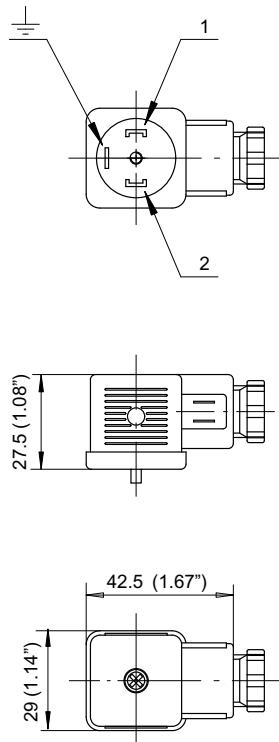


Part number:
2005441.10009



For power input	D.C.
Connector type	DIN 43650
Number of poles	2 + $\frac{1}{-}$
Supply voltage	max. 220 V.
Nom. capacity at contacts	10 A.
Max capacity at contacts	16 A.
Resistance at contacts	≥ 4 mOhm
Max section of cable	1.5 mm ²
Outer material	Glass fibre reinforced Nylon
Contact mount material	
Color	Black
Armour clamp	Pg 9
\varnothing cable	6-8 mm.
Protection factor	IP65 (DIN40050)
Insulation class	C (VDE0110)
Temperature range	-40 / +90 °C

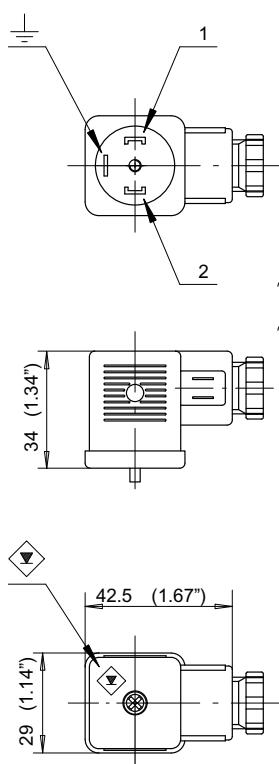

Part number:
2005441.10012




For power input	A.C.
Connector type	DIN 43650
Number of poles	2 + $\frac{1}{-}$
Supply voltage	max. 220 V.
Nominal capacity at contacts	10 A.
Max. capacity at contacts	16 A.
Resistance at contacts	≥ 4 mOhm
Max. section of cable	1.5 mm ²
Outer material	Glass fibre reinforced Nylon
Contact mount material	
Color	Black
Diodes	1N 4007 GP
Overshoot protection	VDR
Armour clamp	Pg 9
\varnothing cable	6-8 mm.
Protection factor	IP65 (DIN40050)
Insulation class	C (VDE0110)
Temperature range	-40 / +90 °C

7.3.7 Proportional solenoid valve: PDF817/HSC

Normally closed

Poppet type

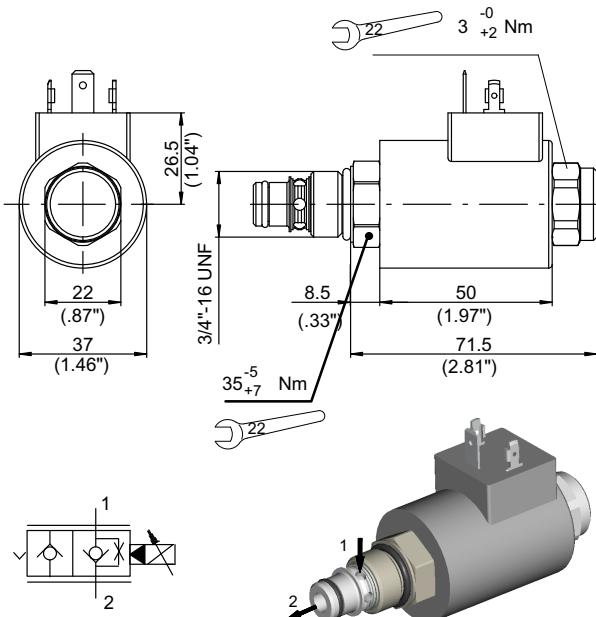



Pilot type

Flow from 1 to 2



	Electric performances	
	12 V	24 V
Resistance (at 20°C)	7.2 Ohms	22 Ohms
PWM frequency	100-150 Hz PWM frequency	
Connection type	DIN 43650	
Max current, non continuous Duty	1500 mA	1000 mA
Max current, continuous Duty	1200-1250 mA	800-850 mA
Minimum current	350-400 mA	200-250 mA
Other connectors available	(DIN), AMP JT	
Seal kit code	200599999630	

Code	PDF817/HSC-HC (12 V) 200957110004	With DIN coil, without connector
	PDF817/HSC-HC (24 V) 200957120003	

Flow (l/min) vs. Current (mA - PWM @ 100 Hz) at various differential pressures (bar) @ 50°C

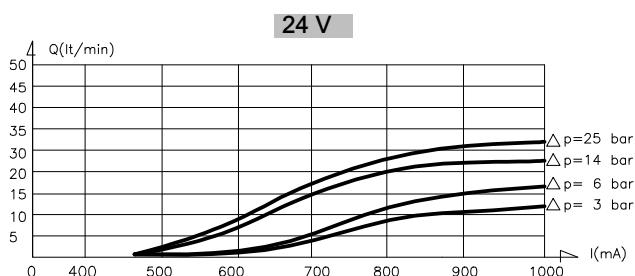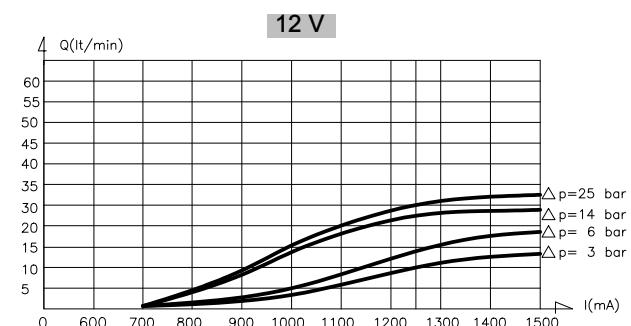

Typical hysteresis


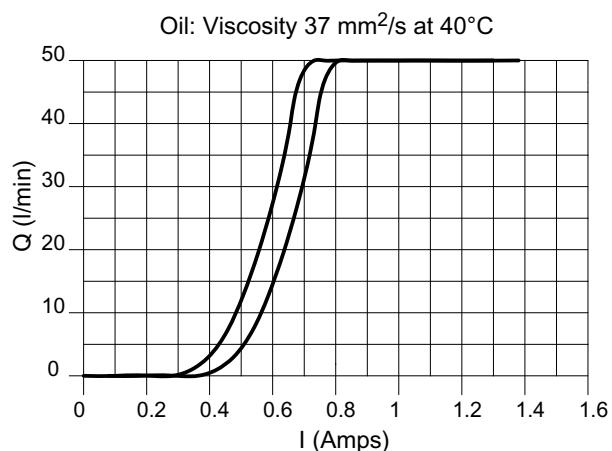
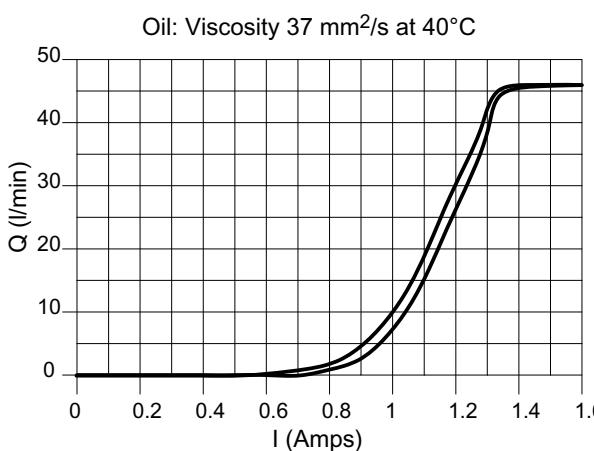


7.3.8 Electric connectors to control proportional valves

Ordering code	200544110031
Connector type	DIN 43650
PWM dither frequency	55-200 Hz (adjustable)
Operating temperature	-25°C / +85 °C
Adjustable ramp time	0.05- 5 sec.

Current output range (PWM)	100-3000 mA
Degree of protection	IP 67
Analog input signal (*)	0-5 V
Input impedance	50 kOhm
Typical ctrl pot resistance	2-47 kOhm

(*) Other analog input signal on demand (0-10 V or 0-20 mA)

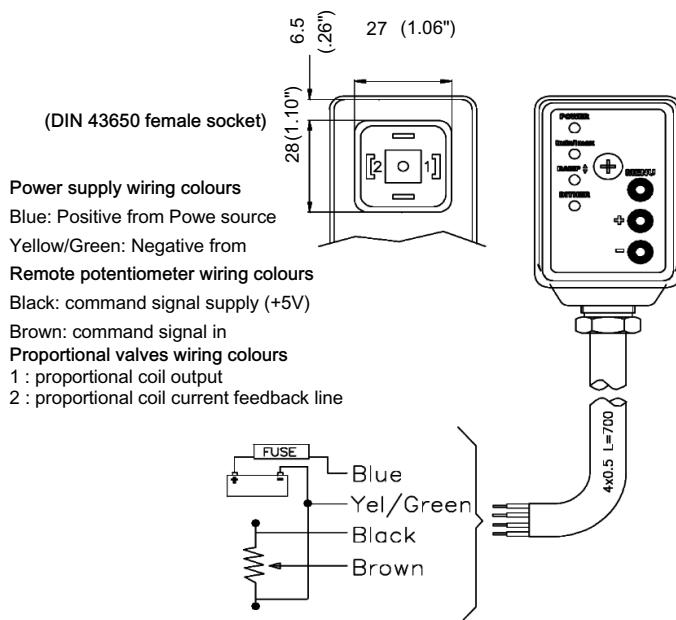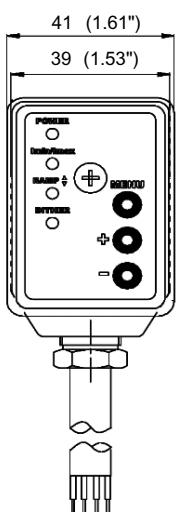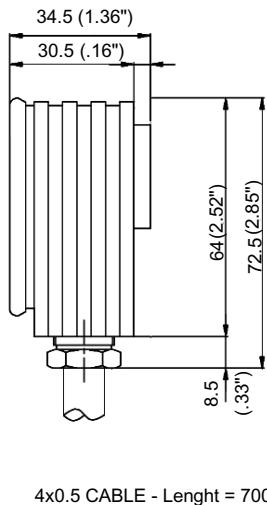

IMPORTANT! Other type of electric connectors and electronic cards are available.
See www.bucherhydraulics.com









7.4 Manual lowering valve

7.4.1 Manual lowering valve: ZR817/22-TV (dedicated housing is requested)


Normally closed

Code 200987601960
Max. pressure 230 bar
Max. recommended pressure 210 bar

Max flow 25 l/min.
Internal leakage 0-5 drops/min.
Temperature range -20/+90 °C
O-Ring replacement kit 200974200160

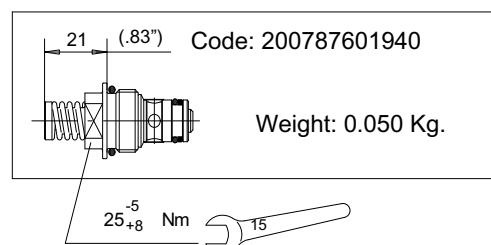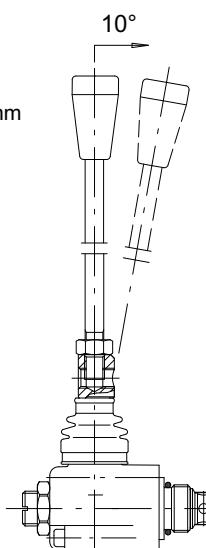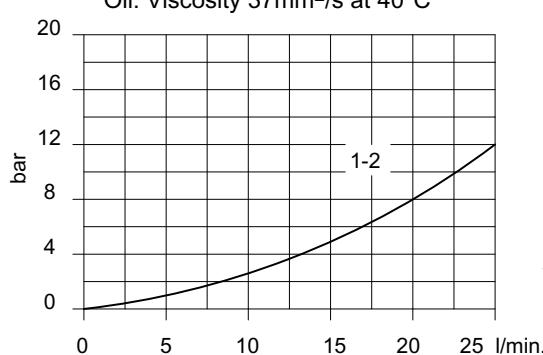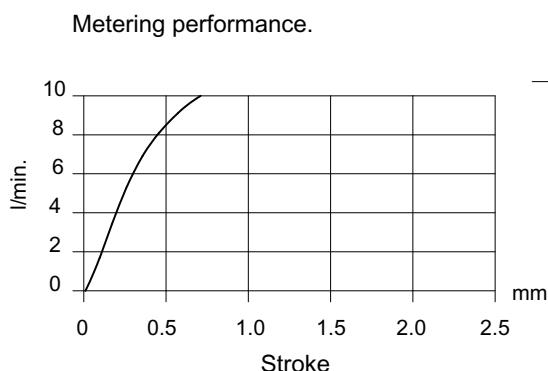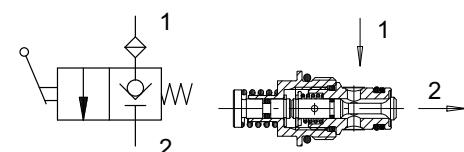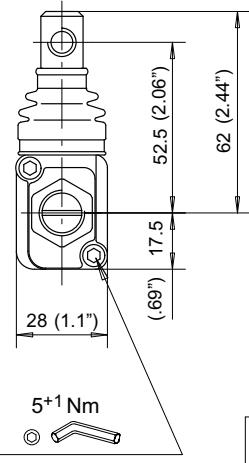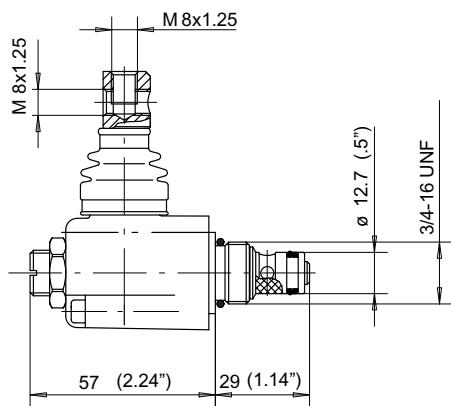


The connecting end of the lever allows the handle to be mounted in two different positions.

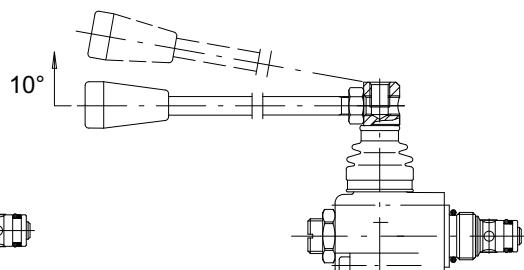

Lever stick

7
Lever stick
A | L | 0 | 0 | 1



Lo Length	Type	Code
150 mm - 5.90 inches	AL001	200702210190
200 mm - 7.87 inches	AL002	200702210030
250 mm - 9.84 inches	AL003	200702210050
300 mm - 11.80 inches	AL004	200702210060

7.4.2 Manual lowering valve with microswitch:
ZR817/22-TVM (dedicated housing is requested)

Normally closed

Code 200987601950

Max. pressure 230 bar






Max. recommended pressure 210 bar

Max flow 25 l/min.

Internal leakage 0-5 drops/min.



Temperature range -20/+90 °C

O-Ring replacement kit 200974200160

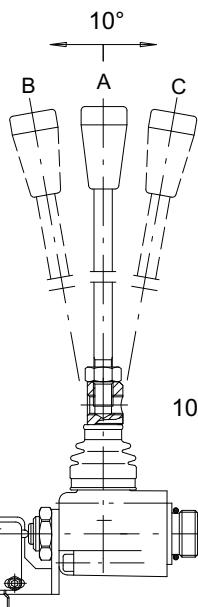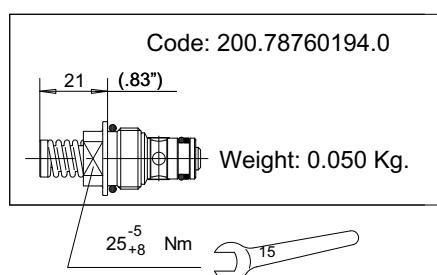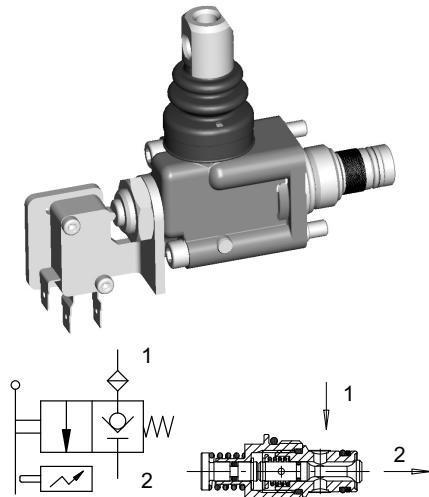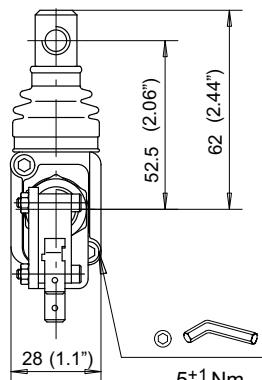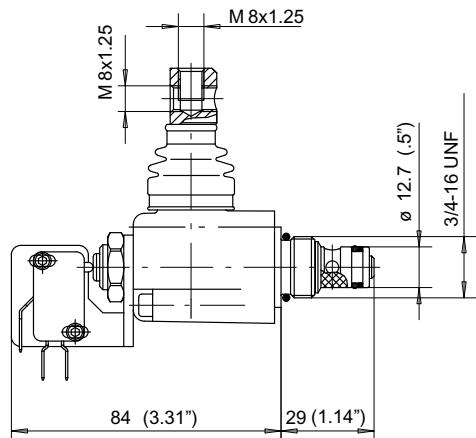


A → B = Microswitch operated
A → C = Hydraulically operated

The connecting end of the lever allows the handle to be mounted in two different positions.

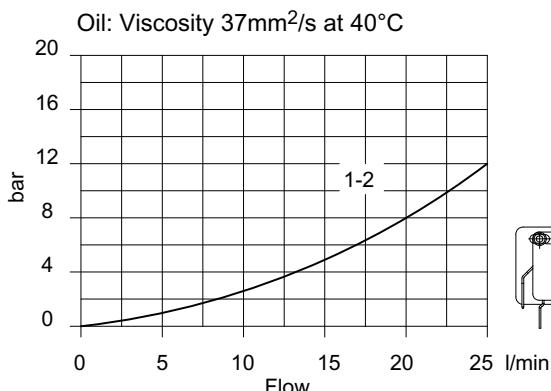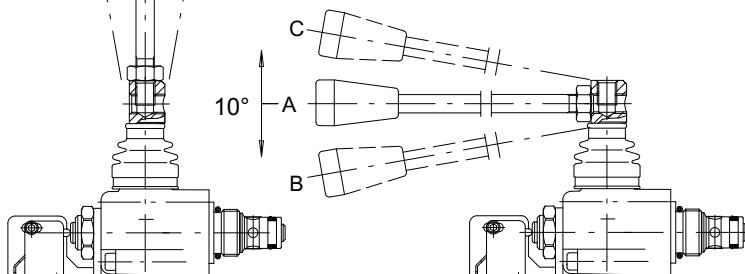

Lever stick





7
Lever stick
A | L | 0 | 0 | 1



Lo Length	Type	Code
150 mm - 5.90 inches	AL001	200702210190
200 mm - 7.87 inches	AL002	200702210030
250 mm - 9.84 inches	AL003	200702210050
300 mm - 11.80 inches	AL004	200702210060

7.4.3 Microswitch

Code 200544124013



Code 200544124014

Code (micro only)	200544124013	200544124014
Complete code (micro+fixing kit)	200762500060	200762500050
Voltage	250 V.	
Index protection	IP00	
Nominal current	16 A.	
Max. current	20 A.	
Temperature range	-20/+125 °C	
Max total stroke	2.6 mm.	
Working stroke	1.2 mm.	
Mechanical life	2x10 ⁷ cycles	

7.5 Manual override valves

7.5.1 Manual override valve: NV1/817-R

Manual override




Flow restrictor

Poppet type


Flow from 1 to 2

Code 200787601601

Max. pressure 230 bar
 Max flow 25 l/min.
 Internal leakage 0-5 drops/min.
 Temperature range -20/+90 °C
 O-Ring replacement kit 200974200160
 Weight 0.110 Kg.

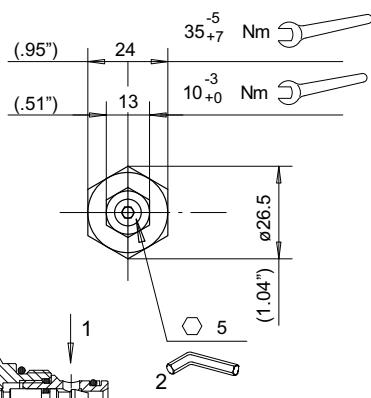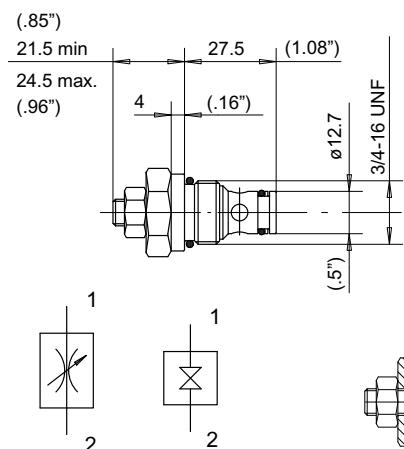



Oil: Viscosity 37mm²/s at 40°C
 Pressure drops with restrictor open

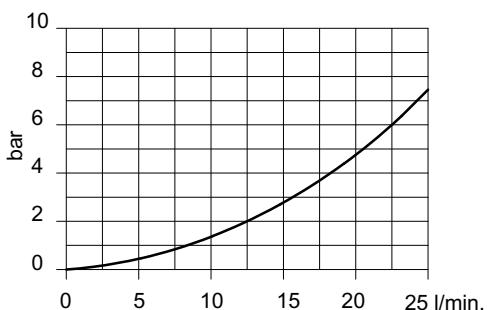






7.6 Emergency hand pump: PM817/1.5

Inlet check
Outlet check
Ball type
Code 200948200080


Max recommended pressure 210 bar
Displacement 1.5 cm³
Internal leakage 0-5 drops/min.
Temperature range -20/+90 °C
O-Ring replacement kit 200974200340

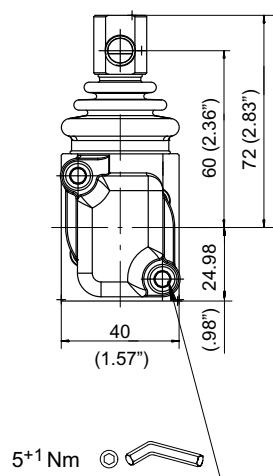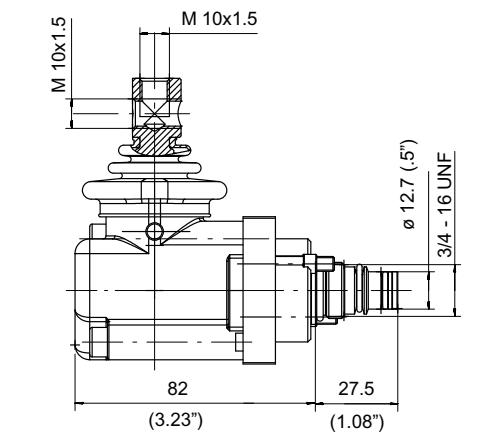

The connecting end of the lever allows the handle to be mounted in two different positions.

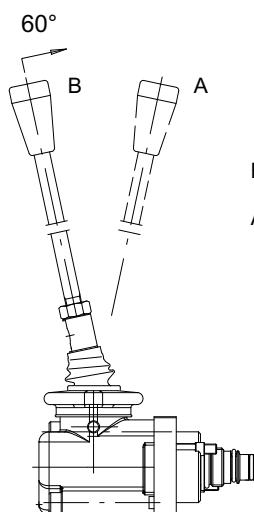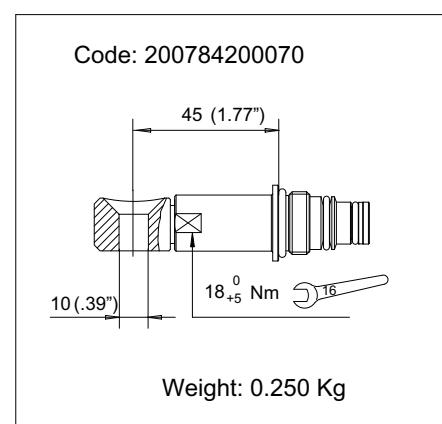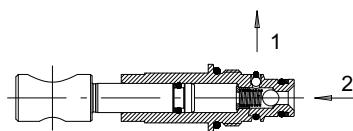


B → A = Inlet
A → B = Outlet

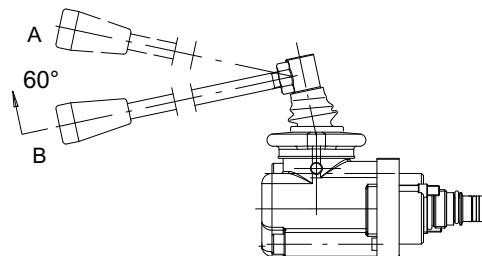

Lever stick

7 Lever stick
A L 0 0 1



L ₀ Length	Type	Code
190 mm - 7.48 inches	AL001	200702220010
255 mm - 10.04 inches	AL002	200702220030
300 mm - 11.81 inches	AL003	200702220040
350 mm - 13.78 inches	AL004	200702220050


7.7 Solenoid valves

(For availability please consult our Sales Organisation)

Circuit	Type
	CB-02
	CC-02
	CA-02
	CD-02
	CX-02

4 ways, two positions solenoid valves also available, please contact our Sales Department.



4 ways, three positions

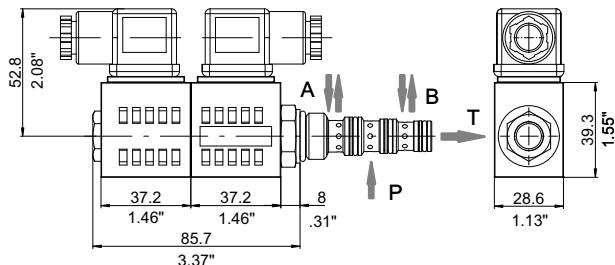


Std. Voltage	Type	
12 V D.C.	13	Coil and connector features: see section 7.3.5 (SPD type) and 7.3.6
24 V D.C.	23	
24 V A.C.	21	
110 V A.C.	41	
220 V A.C.	51	

7.8 Other valves



7.8.1 Dual pilot to open, Poppet-Type check valve

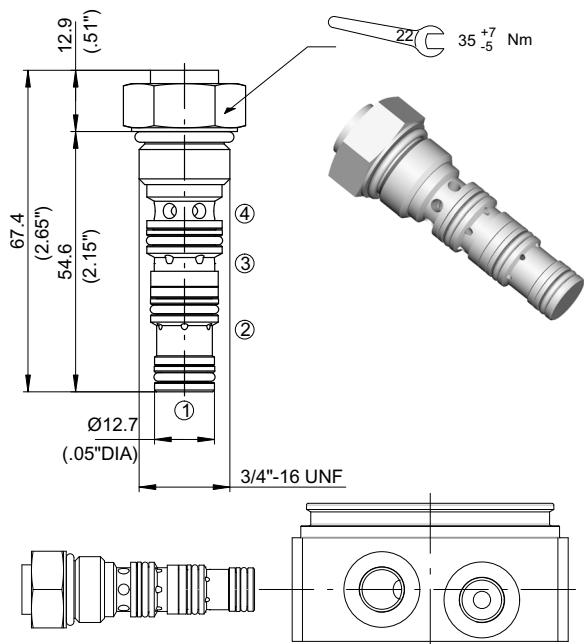

Pressure drop vs. flow

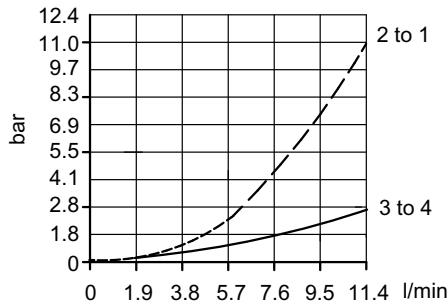

7.8.2 Throttle compensated flow control valve: VRC05

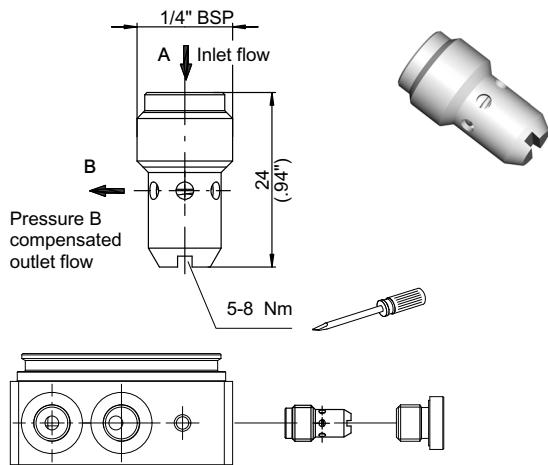


Type	Regulated flow Q	Code
	l/min	
VRC05/0.35	0.35	200787202141
VRC05/0.7	0.7	200787202130
VRC05/1	1	200787202500
VRC05/1.6	1.6	200787202510
VRC05/2.5	2.5	200787202520

Flow tolerance = ±15%


7.9 Valve cavity plugs

7.9.1 Valve cavity plug T817/2

Two way

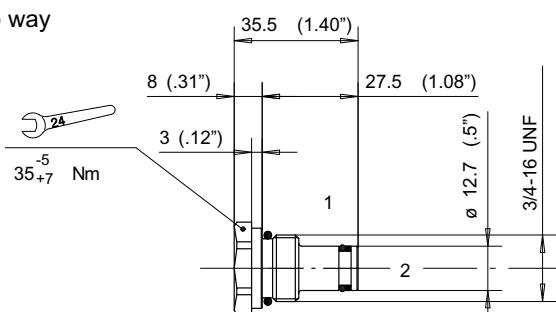


Code	200778800020
Seal kit code	200974200160
Weight	0.070 Kg.



7.10 Example of hydraulic power pack ordering code


	Type of housing													
1	U	P	4	0	/	K	1	+	K	1	G	2		
	Pump						Hi-Lo			Series				
2	A	P	0	5	/	0	.	7	5		S	4	3	9
	Tank				Fitting				Pos.					
3	L	-	0	1	2	R					P	1	5	
	Suction assembly kit													
4	/	/	/	/	/	/	/	/	/	/	/	/	/	
	Electric motor				Pos.		Relay		Pos.					
5	C	1	2	8	P	K	/	A	0	A				
	Drive													
6	E	6	1											
	Cavity b						Cavity							
	1	5	V	M	D						P	M	8	1
	Cavity d													
7	S	D	F	8	1	7	/	2	2	-	T	H		
	Cavity e										Hand lever			
	V	R	C	0	5	/	1							

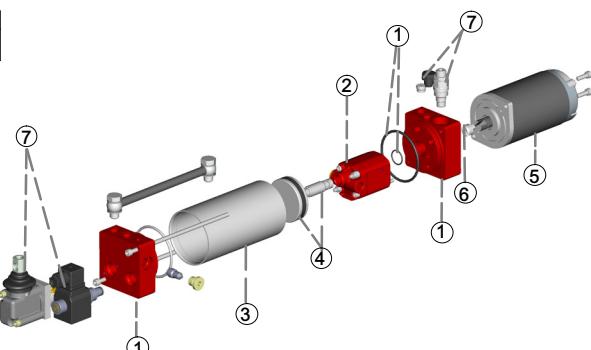

Composition of product code

Composition of predictor code
UP40/K1G2.... • AP05/0.75 • S439 L-003R • P15 • C128PK/A0 • A • E61 • b) 15VMD • c) PM817/1.5 • d) SDF817/22-TH-23 • e) VRC05/1

Product identification plate example:

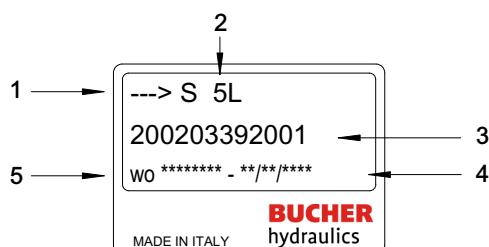

- 1 : Rotation (S= Counterclockwise rotation)
 - 2 : Manufacturing year and month
 - 3 : Bucher Hydraulics S.p.A. product code
 - 4 : Date
 - 5 : Work order number

Manufacturing month	Manufacturing year					
	2015	2016	2017	2018	2019	2020
January	5A	6A	7A	8M	9M	0M
February	5B	6B	7B	8N	9N	0N
March	5C	6C	7C	8P	9P	0P
April	5D	6D	7D	8Q	9Q	0Q
May	5E	6E	7E	8R	9R	0R
June	5F	6F	7F	8S	9S	0S
July	5G	6G	7G	8T	9T	0T
August	5H	6H	7H	8U	9U	0U
September	5I	6I	7I	8V	9V	0V
October	5J	6J	7J	8Z	9Z	0Z
November	5K	6K	7K	8X	9X	0X
December	5L	6L	7L	8Y	9Y	0Y

info.it@bucherhydraulics.com

www.bucherhydraulics.com

© 2016 by Bucher Hydraulics S.p.A, I-42124 Reggio Emilia
All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 440.405.000