INTERNATIONAL



Bell Housings with Flexible Pump Mounting with Oil/Air Cooler

PTK Series

1. **DESCRIPTION**

1.1. **GENERAL**

Bell housings are connection elements between drive motors and hydraulic pumps.

Both connecting flanges are supplied ready for installation.

The bell housings are made from an aluminium cast alloy.

On the PTK (bell housing with built-in oil/air cooler) the oil is cooled efficiently by an air stream produced by a fan mounted on the motor shaft.

This combination of noise-damping bell housing and oil/air cooler considerably simplifies the construction and reduces the cost of hydraulic systems.

The high cooling capacity of the built-in cooler enables the user to reduce his tank capacity.

This reduction in oil quantity results in a reduction in operating costs and oil disposal costs.

1.2. **MODELS**

Bell housings with flexible pump mounting and oil/air cooler are supplied with dimensions to the VDMA 24561 standard

2. **TECHNICAL** SPECIFICATIONS

2.1. **GENERAL**

2.1.1 Mounting position Optional.

Once both mounting bolts have been removed, the cooler element can be turned through 180° (ports point towards the motor or to the pump).

2.1.2 Temperature ranges

During operation of the PTK, ensure that the maximum oil temperature of +100 °C is not exceeded.

Warning! If there is a temperature difference of over 50 °C between the oil inlet on the cooler element and the ambient temperature, large fluctuations in temperature (e.g. by turning on and off frequently) must be avoided. Otherwise this could result in significant reduction in lifetime or direct damage to the element through stress cracking.

Permitted ambient temperature: -20 °C to +60 °C

2.1.3 Noise level reduction

PTKs have a flexible damping ring as standard between the bell housing and pump flange.

This ensures a complete decoupling of the pump from the motor and bell housing.


The additional use of flexible damping rails reduces the noise level still further.


Basically, the noise level reduction achieved depends on many factors such as pump type, operating pressure, type of fitting, design etc.

It is therefore not possible to quote exact figures.

In general, noise level reductions of up to 6 dB(A) can be achieved by using the flexible pump mounting.

The illustration below shows how the test is set up, together with a graph showing typical noise level improvements when using a flexible bell housing compared with a rigid bell housing.

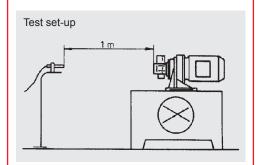



If the bolts used are too short, there is the risk of damaging the thread and consequently the whole unit.

2.1.5 Weight loading


The permitted radial or axial load of the PTK with flexible pump mounting, allowing for an operating temperature of +60 °C:

PTK Nominal size	Type of damping ring	Permitted force due to gravity F max. [N]	Centre of gravity distance for radial load L [mm]
200/ 2001	Е	400	200
250	Е	700	200
300	Е	1150	200
350/ 3501	Е	1500	200

For a larger centre of gravity distance L* the permitted force due to gravity is reduced according to the following formula:

$$\mathsf{F}_{\mathsf{permitt.*}} = \frac{\mathsf{F}_{\mathsf{max.}} \bullet \mathsf{L}}{\mathsf{L}^*} [\mathsf{N}]$$

If the centre of gravity distance L* of the pump is smaller than the centre of gravity distance L in the table, then the permitted force due to gravity F_{permitt.} for the pump is equal to the maximum force due to gravity \mathbf{F}_{max} in the table.

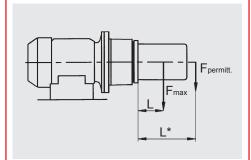

2.2. SPECIFICATIONS

2.2.1 **Coolant**

Mineral oil to DIN 51524, other fluids on request

2.2.2 Nominal rpm for drive n=1430 1/min

(Base rpm for the stated technical data) (up to 3000 1/min possible)

2.2.3 Direction of rotation When looking at the pump shaft clockwise

2.2.4 Air flow rate

Nominal size	Volume
PTK-200	approx. 72 m³/h
PTK-2001	approx. 72 m³/h
PTK-250	approx. 260 m³/h
PTK-300	approx. 435 m³/h
PTK-350	approx. 780 m³/h
PTK-3501	approx. 780 m³/h

2.2.5 Power requirement for fan

Nominal	Rotation speed								
size	1430 1/min	1800 1/min							
PTK-200	20 Watt	30 Watt							
PTK-2001	20 Watt	30 Watt							
PTK-250	30 Watt	50 Watt							
PTK-300	90 Watt	130 Watt							
PTK-350	140 Watt	220 Watt							
PTK-3501	140 Watt	220 Watt							

2.2.6 Noise levels for PTK with electric motor without pump

(measured to DIN 45635, Part 1)

		,
Nominal size	Output of electric motor at 1430 1/min	PTK with electric motor
PTK-200	1.5 kW	52 db(A)
PTK-250	4 kW	58 db(A)
PTK-300	5.5 kW	69 db(A)
PTK-350	11 kW	70 db(A)

The noise levels with electric motor depend on the make of motor.

The noise levels are only a guide as the acoustic properties of a room and reflections have an effect on the noise level

2.3. HYDRAULIC DATA

2.3.1 Cooler element

Material

Aluminium

Pressure resistance

- At an operating pressure of ≤ 16 bar and a temperature ≤ 50 °C, 2 million cycles (2 Hz) are achieved. For higher operating pressures and/or temperatures, the life expectancy will be shorter.
- Maximum operating pressure at static pressure resistance is 40 bar.

Mounting

When mounting or dismantling the threaded connection of the cooler inlet or outlet, the torque must be countered (protects the cooler element from distortions). Please also see the assembly instructions supplied with the product.

NOTE


The information in this brochure relates to the operating conditions and applications described.

For applications and operating conditions not described, please contact the relevant technical department. Subject to technical modifications.


2.3.2 Cooling capacity

Cooling capacity against oil flow rate for different temperature differentials ΔT between oil inlet and air inlet. (Motor rpm 1430 1/min)


PTK-200/PTK-2001

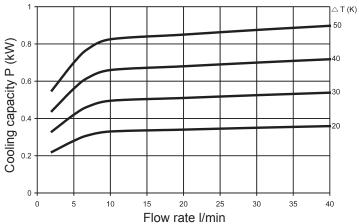


PTK-250

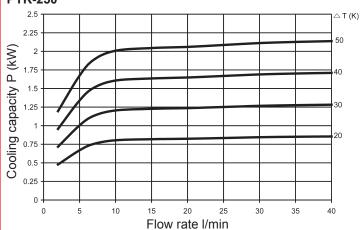

PTK-300

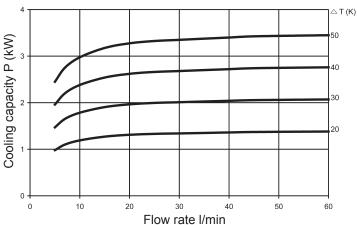


PTK-350/PTK-3501

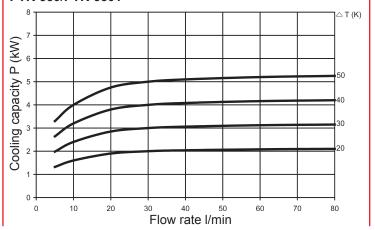


2.3.3 Pressure drop Δp in the cooler element

Flow direction is optional. The differential pressure Δp is shown against flow rate for different viscosities.


PTK-200/PTK-2001

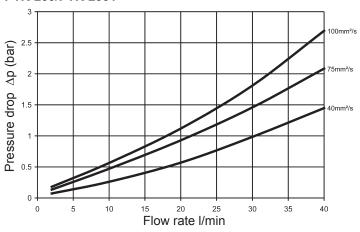


PTK-250

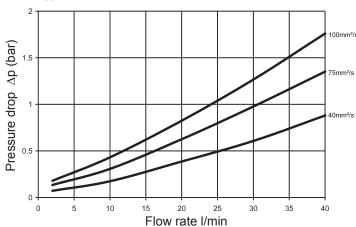

PTK-300

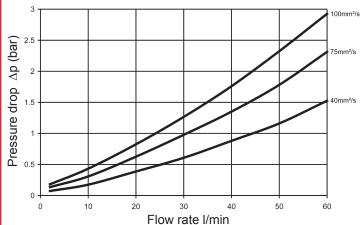

PTK-350/PTK-3501

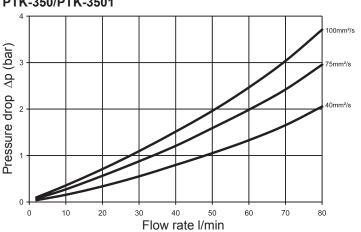


3. MODEL CODE PTK - 250 / 2.X / M / FL001 - E / F3 Bell housing with flexible pump mounting and built-in oil/air cooler Nominal size for IEC standard motor (type of mounting B5, B35, V1, V15) Nominal size Output Size PTK Electric motor n = 1430 rpm2001 80 0.55 - 0.75 kW 200 90 1.1 - 1.5 kW 250 100/112 2.2 - 4.0 kW 300 132 5.5 - 7.5 kW 350 160 11.0 - 15.0 kW 3501 180 18.5 - 22.0 kW Modification number -Mineral oil resistance (Special models on request) Bore template code for pump connection (please use our sizing program PT-WIN) Type of damping ring = standard = damping ring for higher loads (greater rigidity)

Accessories

= without accessories (no details)

F3 = bell housing foot bracket

DIMENSIONS 3.1.

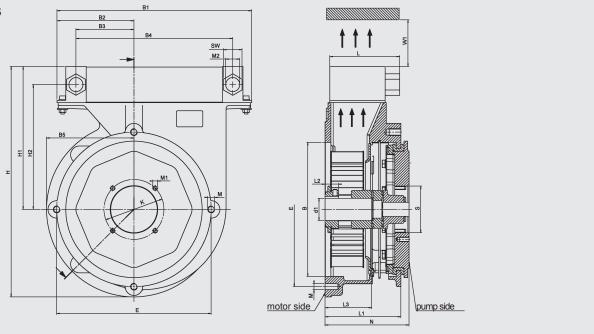

Electric	Output	Electric	PTK	PTK	PTK																	
motor	at	motor																				
	1500	Drive																				
	rpm	shaft	Nominal	Foot	Mounting																	min.
Size	kW	dxl	size	bracket	plate	Н	H1	H2	В	Е	M	B1	B2	B3	B4	B5	SW	M2	L	L1	L2	W1
80	0.55	19 x 40	PTK-2001																			
80	0.75	13 7 70	1 111-2001	- PTFL-200	PP200	275	174	143	130	164	M10	260	110	77.5	195	100	32	G3/4	84	80	21	120
90 S	1.1	24 x 50	PTK-200	1 11 L-200	11200	210	177	170	100	10-	IVIIO	200	110	11.5	133	100	52	03/4	0-	00	۷ ۱	120
90 L	1.5	24 7 00	1 110 200																			
100 L	2.2	28 x 60	PTK-250	PTFL-250	PP250	327	197	166	180	215	M12	334	156	123.5	269	130	32	G3/4	120	105	23	160
112 M	4	20 x 00	1 110 200	1 11 L 200	11230	321	191	100	100	213	IVI I Z	004	100	123.3	209	130	32	00/4	120	100	20	100
132 S	5.5	38 x 80 P	PTK-300	PTFL-300	PP-300	395	245	214	230	265	M12	334	132	99.5	269	150	32	G3/4	120	130	23	200
132 M	7.5			1 11 L-300	11-500	333	240	217	230	200	IVIIZ	JJ-	102	33.3	203	150	52	03/4	120	150	20	200
160 M	11	42 x 110 PTK-35	DTK 350	TK-350 PTFL-350		437	262	231	050		M16										24	
160 L	15		F 117-330							200		334	400	69.5	269	175	32	G3/4	148	170		240
180 M	18.5	10 v 110	PTK-3501	FIFL-350	-	431	202	231	250	300	IVI I O	334	102	09.5	209	1/5	32	G3/4	140	170	31	240
180 L	22	40 X 110	L 1V-2201																			

To identify the bore template code (dimensions N, S, K, M1), please use our sizing program PT-WIN as far as possible, or ask at our Head Office. You can download and use the PT-WIN program free of charge from our website www.hydac.com by clicking through Support » Download » Software » Product Division - Accessories.

Accessories:

For the range of accessories (bell housing foot brackets, bell housing mounting plate, damping rails, damping rings and couplings) please use our supplementary brochure "Bell Housing Accessories". This brochure can be downloaded from our website www.hydac.com.

HYDAC Accessories GmbH Hirschbachstr. 2

66280 Sulzbach/Saar

Tel.: +49 (0)6897 - 509-01 Fax: +49 (0)6897 - 509-1009 Internet: www.hydac.com E-Mail: info@hydac.com