

PRESSURE TEST DEVICE

DESCRIPTION

PRESSURE TEST DEVICE IS USED FOR CONTROL OPERATION OF COMPRESSED GASES AND LIQUIDS. TB1.4 SERIES PRESSURE TEST DEVICE HAS FOUR PIECES MANOMETERS. IT CAN BE MEASURED FROM TWO DIFFERENT LINE, AT THE SAME TIME THANKS TO TWO PIECES PRESSURE TEST HOSES. PRODUCT IS SOLID FOR THESE MEASUREMENTS.



APPLICATIONS

- Mobile Hydraulics, Hydraulics and Machines
- AUTOMOTIVE SECTOR
- HYDRAULIC PRESS MACHINES
- HEAVY-DUTY MACHINES
- ON VEHICLE SECTOR (CRANE, FIRE TRUCKS, GARBAGE TRUCKS ETC.)

TECHNICAL FEATURES

Model	TB1.4
MANOMETER	MANOMETERS WHICH ARE INSIDE OF PRESSURE TEST DEVICE ARE OPTIONALFOR COSTUMERS
PERMISSED FLUID TEMPERATURE	+20°C +60°C
	TEST GLANDS OF PRESSURE TEST DEVICE:
MANOMETER	M16x2 - 1/8" BSP Hydraulic Manometer Test Glands: 2 pieces
TEST GLANDS	M16x2 - 3/8" BSP Hydraulic Manometer Test Glands: 2 pieces
	M16x2 - 1/4" BSP Hydraulic Manometer Test Glands: 2 pieces
PRESSURE	DN2 MANOMETER TEST HOSES M16x2 - 1/4"BSP -200cm 2 PIECES
TEST HOSES	MAX: 630 BAR


NOTE


USER HAS TO SUPPLY ALL SAFETY CONDITIONS TO HAVE BENEFIT FROM PRESSURE TEST DEVICE.

PRESSURE TEST DEVICE



TECHNICAL DIMENSIONS



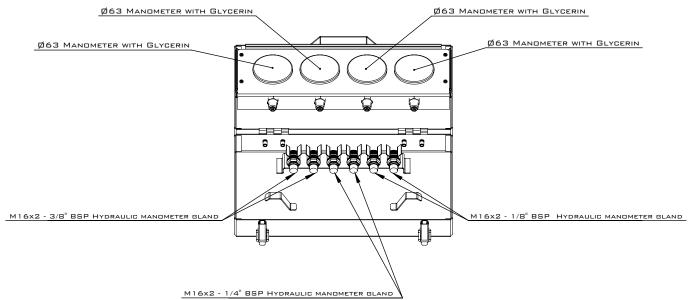

NOTE

- There is 2 pieces 2 meter height pressure test hose for 1 piece TB1.4
- PRESSURE TEST HOSE COMPLIES WITH MANOMETER AND MANOMETER TEST GLANDS




PRESSURE TEST DEVICE

ORDER CODE

PLEASE FILL THE ''...'' BLANK WITH COMPLIED NUMBER TO CREATE ORDER CODE.

MANOMETERS WHICH ARE INSIDE OF PRESSURE TEST DEVICE, ARE PREPARED CUSTOMLY

ACCORDING TO USER'S DESIRE



1. 0...6 BAR 7. 0...160 BAR
2. 0...10 BAR 8. 0...250 BAR
3. 0...25 BAR 9. 0...315 BAR
4. 0...40 BAR 10.0...400 BAR
5. 0...60 BAR 11.0...600 BAR
6. 0...100 BAR