




PS4607

SUBMERSIBLE 1BAR 30M FEP CABLE



Pressure sensors

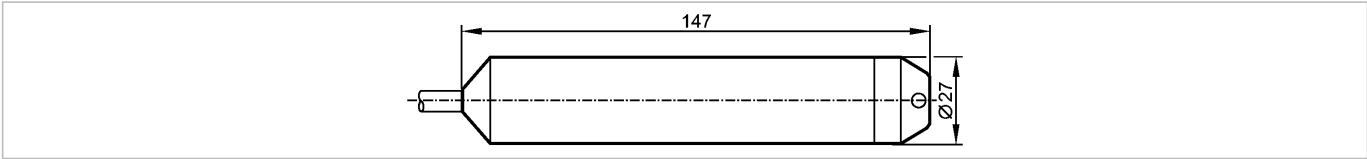

Product characteristics

Submersible pressure transmitter

Cable

with capillary tube for pressure compensation

Analog output

Measuring range: 0...1 bar

Application

Application	Type of pressure: relative pressure Liquids
Pressure rating [bar]	5
Bursting pressure min. [bar]	6
Medium temperature [°C]	-10...85

Electrical data

Electrical design	DC
Operating voltage [V]	10...30 DC
Protection class	III
Reverse polarity protection	yes

Outputs

Output	Analog output
Short-circuit protection	yes
Analog output	4...20 mA
Max. load [Ω]	max. (U _b - 10 V) x 50; 700 (U _b = 24 V)

Measuring / setting range

Measuring range [bar]	0...1
-----------------------	-------

Accuracy / deviations

Accuracy / deviations (in % of the span)	
Characteristics deviation *)	< 0.25 (BFSL) / 0.5 ****)
Linearity	< 0.2 (BFSL)
Repeatability **)	< 0.1
Long-term stability ***)	< 0.2
Temperature coefficients (TEMPCO) in the temperature range 0...50° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	< ± 0.2
Greatest TEMPCO of the span	< ± 0.2

Environment

Ambient temperature [°C]	-10...85
Storage temperature [°C]	-30...80
Protection	IP 68

Mechanical data

Housing materials	stainless steel 316Ti / 1.4571; PA
Min. pressure cycles	



PS4607

SUBMERSIBLE 1BAR 30M FEP CABLE

Pressure sensors

Weight [kg] 2.462

Electrical connection


Connection FEP cable / 30 m; cable diameter 7.5 mm

Wiring

Core colors

BN brown

GN green



1: screen (connected to the housing)

Remarks

Remarks	<p>*) BFSL = Best Fit Straight Line</p> <p>***) with temperature fluctuations < 10 K</p> <p>****) in % of the span per year</p> <p>*****) incl. linearity, zero and span error (limit value setting)</p>
---------	---

Pack quantity [piece] 1