


PX3220

PA-500PSBN14-A-ZVG/US/ IV

Pressure sensors

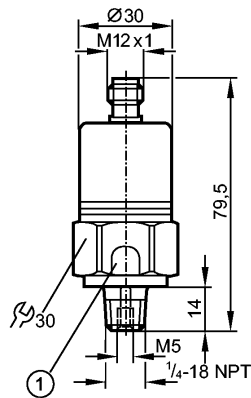

1: Pressure relief mechanism
No mechanical force must be exerted on the pressure relief mechanism.



Product characteristics

Electronic pressure sensor
Quick disconnect
e1 compliant
Process connection: 1/4" NPT A / M5 I
Analog output
Measuring range: 0...5000 psi

Application

Application	Type of pressure: relative pressure Liquids and gases For gaseous media the application is limited to max. 25 bar
Pressure rating [psi]	11600
Bursting pressure min. [psi]	17400
Medium temperature [°C]	-25...90

Electrical data

Electrical design	DC
Operating voltage [V]	9.6...32 DC
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

Outputs

Output	Analog output
Output function	4...20 mA
Overload protection	yes
Max. load [Ω]	(U _b - 9.6 V) x 50; 720 at U _b = 24 V

Measuring / setting range

Measuring range [psi]	0...5000
-----------------------	----------

Accuracy / deviations

Accuracy / deviations (in % of the span)	
Characteristics deviation *)	< ± 0.35 (BFSL) / < ± 0.75 (LS)
Repeatability **)	< 0.15
Long-term stability ***)	< ± 0.05

PX3220

PA-500PSBN14-A-ZVG/US/ IV

Pressure sensors

Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)

Greatest TEMPCO of the zero point	0.3
Greatest TEMPCO of the span	0.4

Reaction times

Step response time analogue output [ms]	3
---	---

Environment

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 68 / IP 69K

Tests / approvals

EMC	EN 61000-4-2 ESD:	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated:	30 V/m
	EN 61000-4-4 Burst:	2 kV
	EN 61000-4-6 HF conducted:	10 V
	radiation of interference	according to the automotive directive 2004/104/EC / CISPR25 according to the automotive directive 2004/104/EC / ISO
	noise immunity HF radiated	11452-2 100 V/m according to ISO7637-2 / severity level 3
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)


Mechanical data

Process connection	¼" NPT A / M5 I
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)
Housing materials	stainless steel 316L / 1.4404; FPM (Viton); PA; EPDM/X (Santoprene)
Min. pressure cycles	100 million
Weight [kg]	0.208

Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

Wiring



Remarks

Remarks	*) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of value of measuring range / 6 months
---------	---

Pack quantity [piece]	1
-----------------------	---