




SF0537

SFD10ABB /US-100



Flow sensors

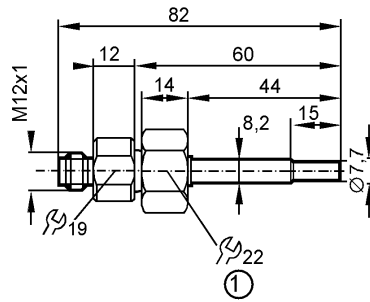

1: internal thread M18 x 1.5



Product characteristics

Flow sensor for connection to evaluation units

for adapter

Quick disconnect

Process connection: internal thread M18 x 1.5 for adapter

Application

Application	liquids and gases
Pressure rating [bar]	30
Medium temperature [°C]	-25...80

Electrical data

Connection to control monitor	VS3000
-------------------------------	--------

Measuring / setting range

Liquids	
Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...60
Gases	
Setting range [cm/s]	200...3000
Greatest sensitivity [cm/s]	200...800

Accuracy / deviations

Max. temperature gradient of medium [K/min]	300
---	-----

Reaction times

Response time [s]	1...10
-------------------	--------

Environment

Protection	IP 67
------------	-------

Tests / approvals

Shock resistance	DIN IEC 68-2-27:	40 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	10 g (55...2000 Hz)
MTTF [Years]		8213

Mechanical data

Process connection	internal thread M18 x 1.5 for adapter
Materials (wetted parts)	stainless steel 316L / 1.4404; O-ring: FKM 8 x 1.5 gr 80° Shore A



SF0537

SFD10ABB /US-100



Flow sensors



Housing materials		stainless steel 316L / 1.4404
Probe length L	[mm]	45
Weight	[kg]	0.087

Electrical connection

Connection		M12 connector
Max. cable length	[m]	100 (5 x 0.5mm ²)

Wiring

- Core colors
- BN brown
 - BU blue
 - BK black
 - WH white
 - GY grey



Remarks

Pack quantity	[piece]	1
---------------	---------	---